

# CKD

## WP Series for Outdoors



Solid products that securely support outdoor facilities in harsh environments

# WP Series for Outdoors

---

WEATHER PROOF



**WEATHER  
PROOF**

**CKD Corporation**

CC-1276A 





## Pursuit of outdoor equipment requirements,

### Proven durability for outdoor use

- **Compound cycle test (JIS H8502:1999) 960 hours cleared**  
Durability related to coating on metal parts
- **Accelerated durability (sunshine weather meter test) cleared 1000 hours**  
Durability of resin parts
- **Ozone exposure test (JIS D0205:1987) 400 hours cleared**  
Durability for rubber and gasket

Accelerated weather resistance test	Combined cycle test	Ozone exposure test
<b>3 Years equivalent</b>	<b>7 Years equivalent</b>	<b>400 Hours</b>

### Lineup of products compatible with min. ambient temp. of -20°C



Expanded range for equipment use in harsh environments


### Each product has a maximum warranty of 3 years

Long-term peace of mind (option)

A guarantee for a period of three years after delivery or one year after the start of use in overseas plants and companies.



(with inspection certificate, inspection guidelines, drawings, traceability system diagram)

\* Cylinders, speed controllers and silencers are excluded.

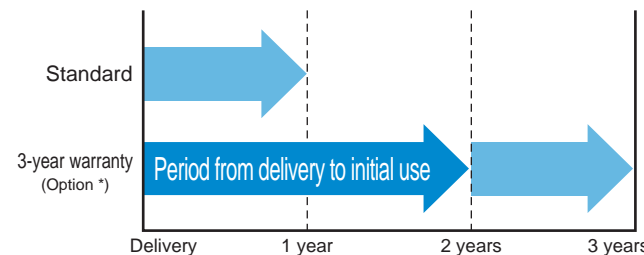


\* The specifications are exchanged to clarify the warranty period.



### Parts with consideration for weather resistance

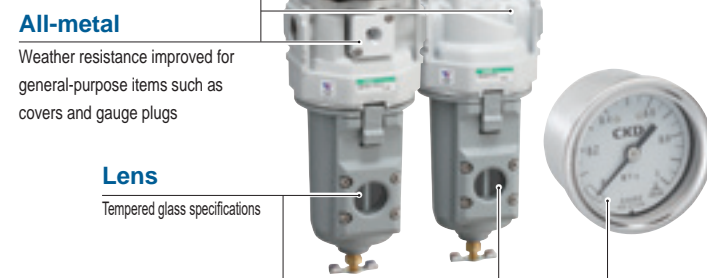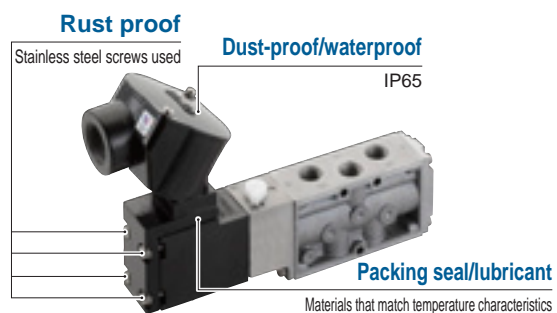

## and expanded area of use and variations.

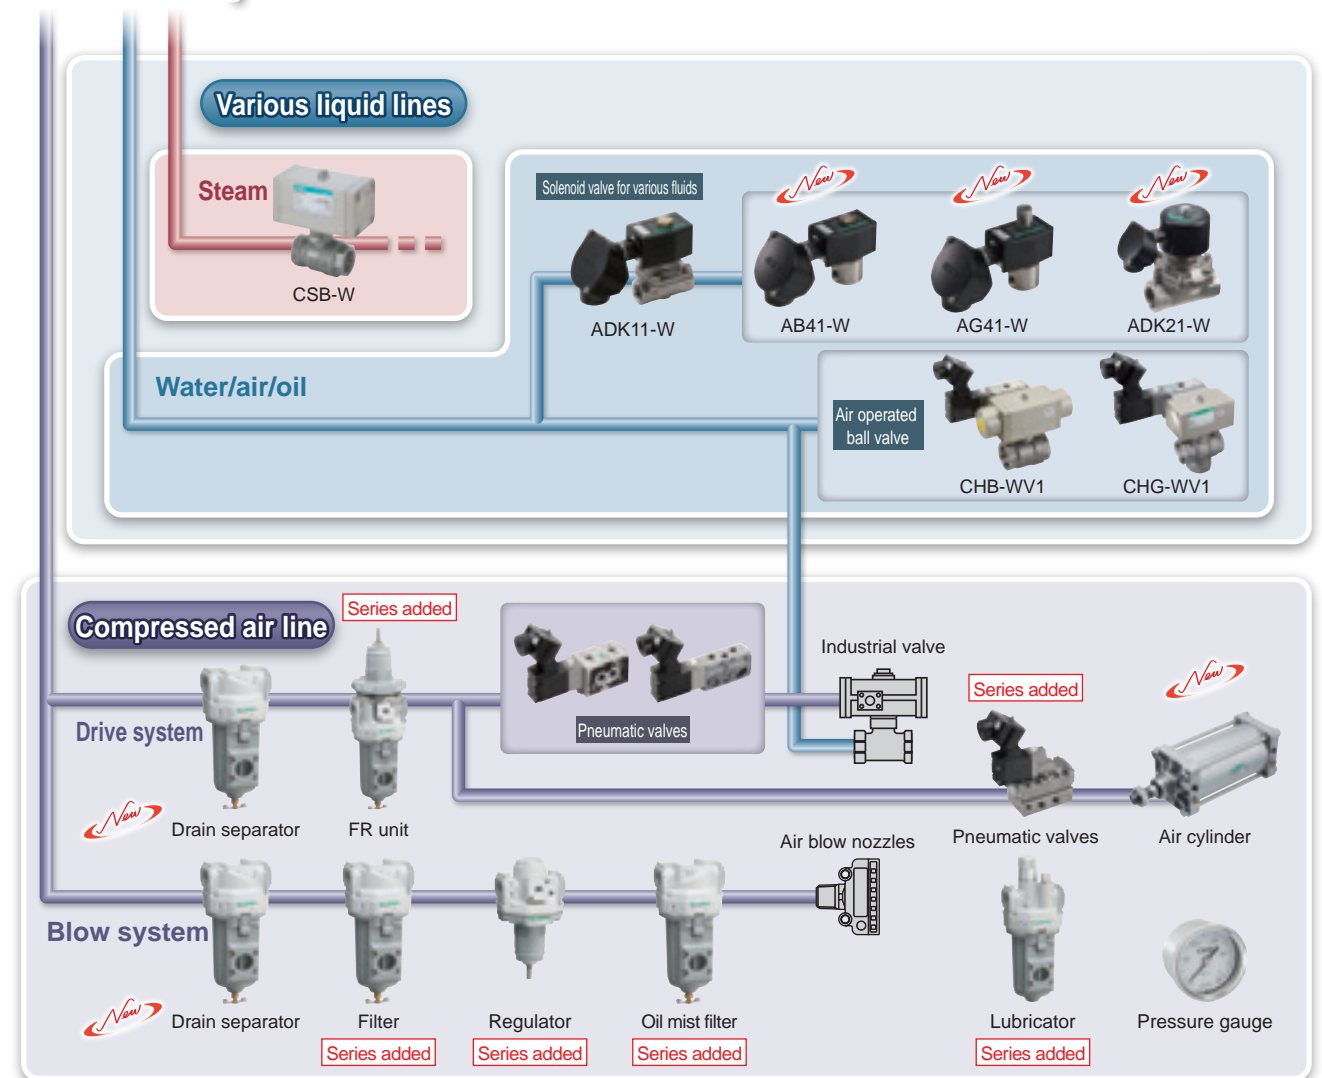

### Outdoor series even for air cylinders (ø40 to ø250)

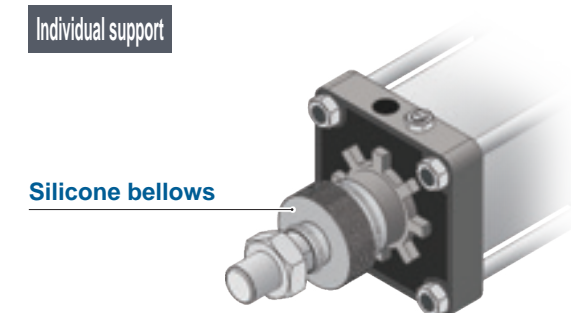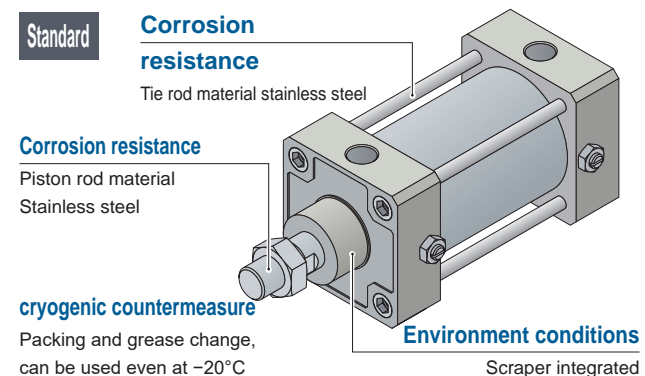



## Compressed air line

### Drain separator/F.R.L. unit

#### Drain separator **FXW Series** P.1

	Port size Rc,NPT,G	Max. flow rate m <sup>3</sup> /min	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
FXW1004	1/4, 3/8	0.55	●	●
FXW1011	1/4, 3/8, 1/2	1.8	●	●
FXW1037	3/4, 1	6.1	●	●



#### Air filter **FW Series** P.5

	Port size Rc,NPT,G	Max. flow rate m <sup>3</sup> /min	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
FW3000-W	1/4, 3/8	1.23/1.5	●	●
FW4000-W	1/4, 3/8, 1/2	1.32/ 2.14/3.0	●	●
FW8000-W	3/4, 1	6.4/6.8	●	●



#### Regulator **RW Series** P.9

	Port size Rc,NPT,G	Max. flow rate m <sup>3</sup> /min	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
RW3000-W	1/4, 3/8	2.0/2.6	●	●
RW4000-W	1/4, 3/8, 1/2	2.5/4.4/5.0	●	●
RW8000-W	3/4, 1	14.0/11.0	●	●



#### Oil mist filter **MW Series** P.17

	Port size Rc,NPT,G	Max. flow rate m <sup>3</sup> /min	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
MW3000-W	1/4, 3/8	0.36	●	●
MW4000-W	1/4, 3/8, 1/2	0.825	●	●
MW8000-W	3/4, 1	2.6	●	●



#### F.R. unit **WW Series** P.21

	Port size Rc,NPT,G	Max. flow rate m <sup>3</sup> /min	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
WW3000-W	1/4, 3/8, 1/2	2.15/2.43/ 2.43	●	●
WW4000-W	1/4, 3/8, 1/2	2.5/4.35/ 4.75	●	●
WW8000-W	3/4, 1	10	●	●



#### F.R. unit **BW7019** P.25

	Port size Rc	Max. flow rate m <sup>3</sup> /min	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
BW7019	1/4	0.9	●	●



#### Lubricator **LW Series** P.13

	Port size Rc,NPT,G	Max. flow rate m <sup>3</sup> /min	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
LW3000-W	1/4, 3/8	1.1/2.25	●	●
LW4000-W	1/4, 3/8, 1/2	1.1/1.7/2.7	●	●
LW8000-W	3/4, 1	6.3/10.0	●	●



#### General-use pressure gauge **GW49D Series** P.28

	Port size Rc	Pressure range MPa	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
GW49D	1/8, 1/4	0 to 1.0	●	●



## Pneumatic valves

### 4F Series P.31, P.39

	Port size	Ambient temperature compatibility	
		-10 to 60°C	-20 to 60°C
4F2*-W	Rp, NPT, G	●	●
4F3*-W	1/4, 3/8	●	●
4F4*-W	1/4, 3/8	●	▲
4F5*-W	Rc, NPT, G	●	▲
4F6*-W	1/2, 3/4	●	▲
4F7*-W	3/4, 1	●	▲



### 4F NAMUR Series P.35

	Port size Rc	Ambient temp compatibility	
		-10 to 60°C	-20 to 60°C
4F1-NM*-W	1/4	●	▲
4F3-NM*-W	1/4, 3/8	●	●



## Pneumatic auxiliary components

### SL-W Series P.29

	Port size R	Application Cylinder diameter (Guideline)	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
SL-8A-W	1/4	ø40 to 100	●	●
SL-10A-W	3/8	ø63 to 140	●	●
SL-15A-W	1/2	ø75 to 180	●	●



### SC1-W Series P.30

	Port size Rc	Application Cylinder diameter (Guideline)	Ambient temp compatibility	
			-10 to 60°C	-20 to 60°C
SC1-8-W	1/4	ø32 to 75	●	●
SC1-10-W	3/8	ø50 to 140	●	●
SC1-15-W	1/2	ø80 to 160	●	●



## Various fluid lines

### Fluid control valves

#### Direct acting 2-port solenoid valve **AB41 Series** P.47

	Port size Rc	Working fluid	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
AB41-*-W	1/4 to 1/2 Orifice size ø1.5 to 10	Air, low vacuum, Water, kerosene	●	●



#### Direct acting 3-port solenoid valve **AG41 Series** P.51

	Port size Rc	Working fluid	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
AG41-*-W	1/4 to 3/8 Orifice size ø2.0 to 2.3	Air, low vacuum, Water, kerosene	●	●



#### Pilot kick 2-port solenoid valve **ADK11 Series** P.55

	Port size Rc	Working fluid	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
ADK11-*-W	1/2 to 1 Orifice size ø16 to 28	Air, low vacuum, Water, kerosene	●	●



#### Pilot kick 2-port solenoid valve **ADK21 Series** P.59

	Port size Rc, flange	Working fluid	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
ADK21-*-W	1 1/4 to 2 3/2F, 40F, 50F Orifice size ø35 to 53	Air, low vacuum, Water, kerosene	●	●



#### Air operated ball valve **CHB/G-W, -WV, -WX Series** P.63

	Port size Rc	Working fluid	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
CHB/CHG-W CHB/CHG-W, X (With solenoid valve)	1/4 to 1 Orifice size ø10 to 40	Air, low vacuum, Water, kerosene	●	●



#### Air operated ball valve **CSB-W Series** P.79

	Port size Rc	Working fluid	Ambient temperature compatibility	
			-10 to 60°C	-20 to 60°C
CSB-W	3/8 to 1 Orifice size ø10 to 40	Steam/hot water	●	●



## Drive components


### Pneumatic cylinders

#### cylinder **SCA2-W, SCS2-W Series** P.83, P.87

	Bore size	Ambient temperature compatibility	
		-10 to 60°C	-20 to 60°C
SCA2*-W	ø40 to 100	●	●
SCS2*-W	ø125 to 250	●	●



● is standard and ▲ is made to order.



Drain separator Outdoor series

# FXW-W Series

Lightweight compact drain separator Compatible compressor 0.75kW to 37kW

● Port size: 1/4 to 1

JISCode



## Specifications

Item	FXW1004	FXW1011	FXW1037
Working fluid	Compressed air		
Working pressure MPa	0.1 to 1.0 *3		
Proof pressure MPa	1.5		
Fluid temperature °C	-20 to 60 (no freezing)		
Ambient temperature °C	-20 to 60		
Water separation efficiency%	99 *2		
Max. processing flow rate *1 L/min (ANR)	550	1800	6100
Port size Rc, NPT, G	1/4, 3/8	1/4, 3/8, 1/2	3/4, 1
Product weight kg	0.4	0.6	1.3

\*1: At inlet pressure 0.7 MPa.

\*2: Water separation efficiency during max. processing flow rate. (Evaporated water droplets (water vapor) cannot be separated)

\*3: In the case of "F" with auto-drain, the min. working pressure of auto-drain is 0.1MPa. Air is purged with initial drain until pressure reaches 0.1 MPa.

\*4: In the case of "F1" with auto-drain, the min. working pressure of auto-drain is 0.15MPa.

\*5: When "F" "F1" with auto-drain is selected, be careful of freezing the drain.

## Option weight


\* Add to the weight of the standard accessories.

Unit:kg


Code	Drain discharge		
	C	F	F1
FXW1004	0	0.02	0.02
FXW1011	0	0.02	0.02
FXW1037	0	0.02	0.02

## Flow characteristics


### ● FXW1004-8-W

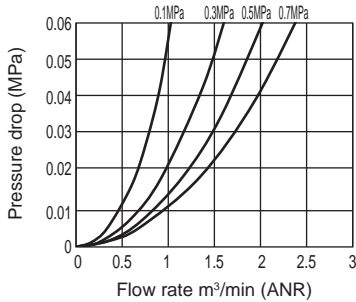


### ● FXW1004-10-W

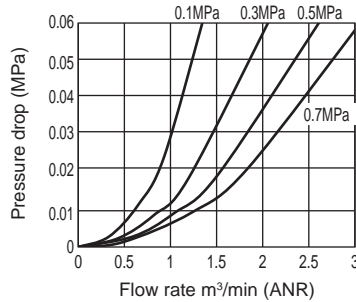


### ● FXW1011-8-W

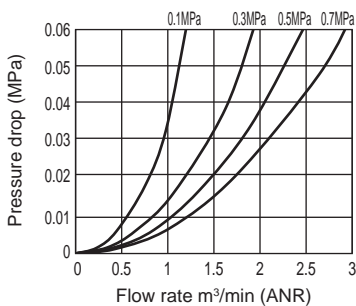


### ● FXW1011-10-W

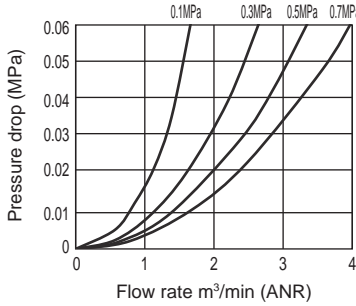


### ● FXW1011-15-W

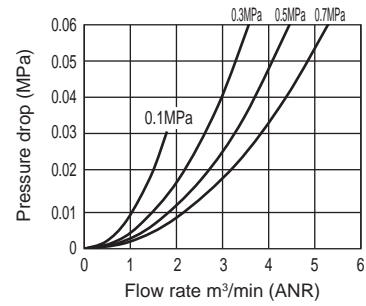


### ● FXW1037-20-W

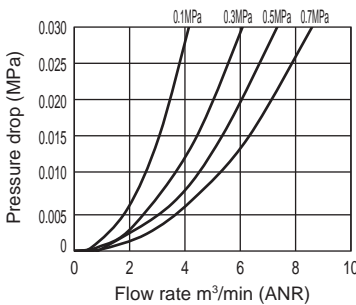

### ● FXW1037-25-W

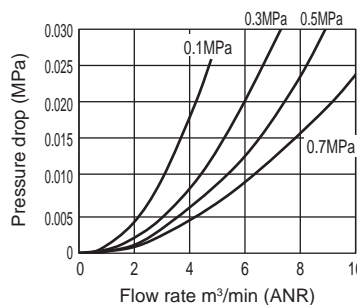

### Max. processing flow rate

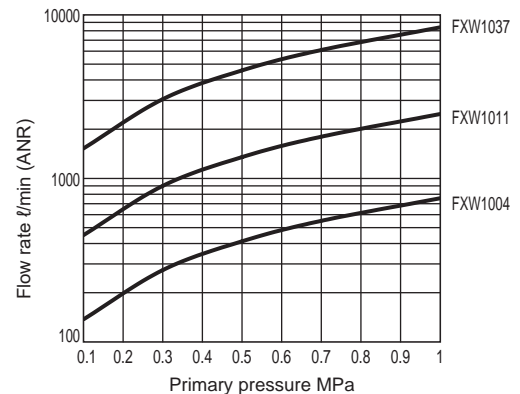



### How to order



A Model No.

B Port size

C Port thread

D Option

E Attachment

A Model No.		
FXW1004	FXW1011	FXW1037

Code	Description	FXW1004	FXW1011	FXW1037		
<b>B Port size</b>						
8	1/4	●	●			
10	3/8	●	●			
15	1/2		●			
20	3/4			●		
25	1			●		
<b>C Port thread</b>						
		*1, *3				
Blank	Rc thread (pressure unit: MPa temperature display unit: °C)	●	●	●		
N	NPT thread (pressure unit: psi temperature display unit: °F)	●	●	●		
G	G thread (pressure unit: bar temperature display unit: °C)	●	●	●		
<b>D Option</b>						
		*4				
Drain discharge *5	Blank	Drain outlet Rc1/8	*2	●	●	●
	C	With manual cock		●	●	●
	F	Auto-drain with manual override (NO: Exhaust when not pressurized)		●	●	●
	F1	Auto-drain with manual override (NC: No exhaust when not pressurized)		●	●	●
guarantee period	Blank	1 year after delivery		●	●	●
	G	3 years after delivery (with inspection certificate, inspection guidelines, traceability system diagram)	*6 *7	●	●	●
Flow Direction	Blank	Standard flow (left → right)		●	●	●
	X1	Reverse flow (right → left)		●	●	●
<b>E Attachment</b>						
				●	●	●
Blank	Not included			●	●	●
BW	C-bracket			●	●	●

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products


Safety  
precautions

### ⚠ Precautions for model No. selection

- \*1: G and NPT threads are available for IN, OUT and drain outlet of auto-drain.
- \*2: "N" or "G" piping thread cannot be selected when the optional drain discharge is "Blank".
- \*3: In compliance with the Measurement Act, the psi display cannot be used in Japan.
- \*4: Select options for the drainage, warranty period and flow direction items. When selecting options for several items, list options in order from the top.
- \*5: Refer to "Pneumatic, Vacuum, and Auxiliary Components (Catalog No.CB-024SA)" for the auto-drain use conditions.
- \*6: The warranty period of option G is 3 years from the date of delivery or 1 year from initial use.
- \*7: For option G, the specifications and drawings must be agreed upon.

### Internal structure diagram and parts list


● FXW1004/FXW1011 ● FXW1037

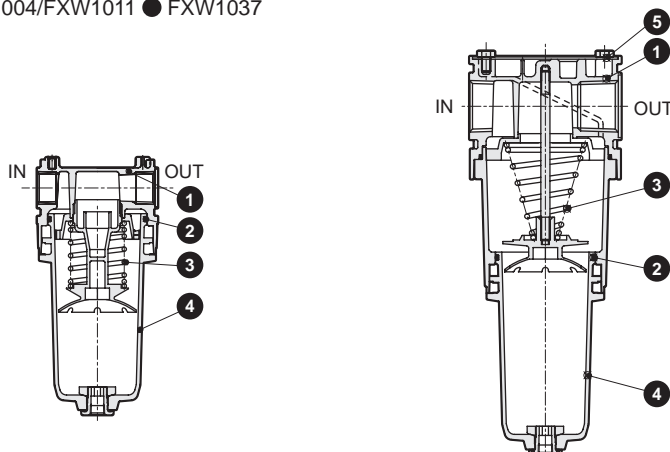

No.	Part name	Material
1	Body	Aluminum alloy die-casting
2	O-ring	Special nitrile rubber
3	Spring	Stainless steel
4	Metal bowl assembly	Aluminum alloy die-casting, copper alloy, Zinc alloy die-casting, nitrile rubber
5	Plate cover	Aluminum


## Dimensions

### ● FXW1004-W

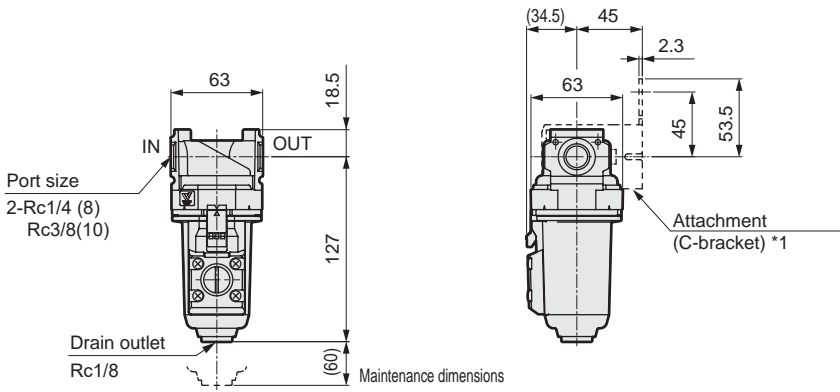


\*1: Bracket is an included option.


· Optional dimensions  
Manual drain cock (C)




· Optional dimensions  
With auto-drain (F, F1)

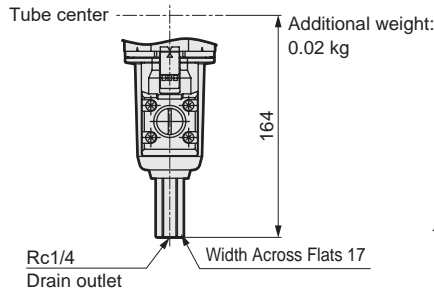

· Attachment  
C-bracket (-BW)  
Part model No.: B320

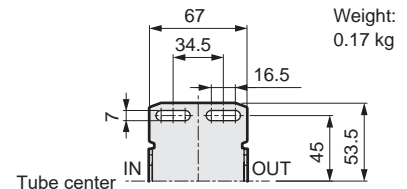


### ● FXW1011-W

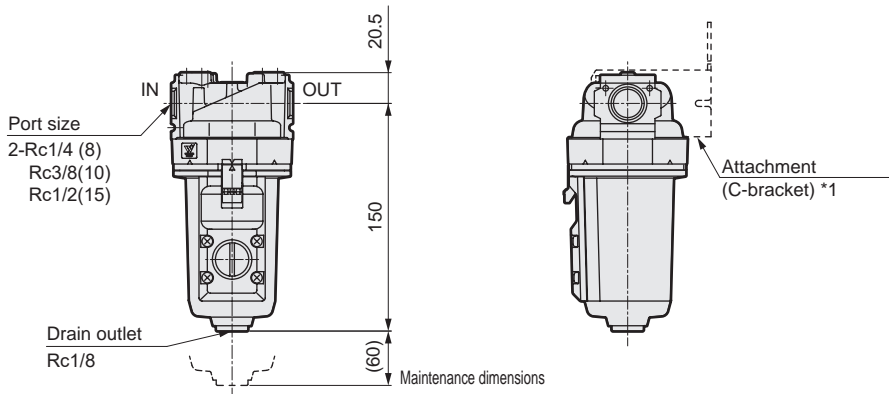


\*1: Bracket is an included option.


· Optional dimensions  
Manual drain cock (C)



· Optional dimensions  
With auto-drain (F, F1)

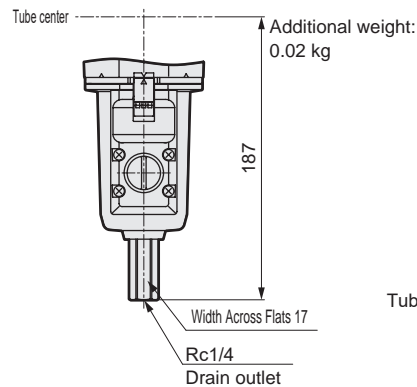


· Attachment  
C-bracket (-BW)  
Part model No.: B420

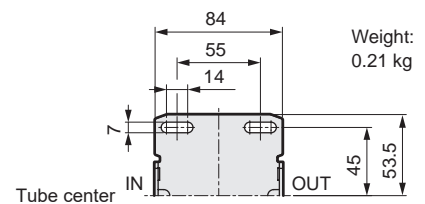




## Dimensions

● FXW1037-W

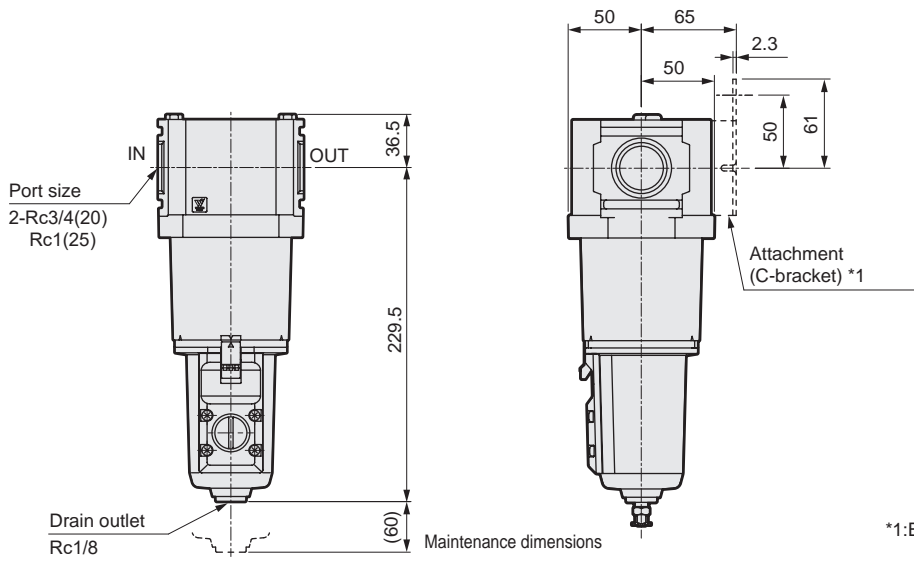


\*1: Bracket is an included option.


· Optional dimensions  
Manual drain cock (C)

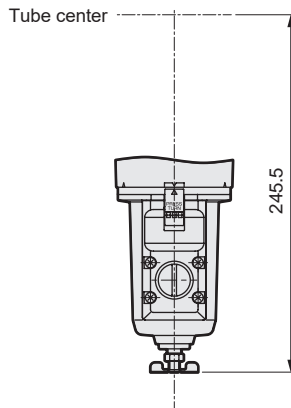

· Optional dimensions  
With auto-drain (F, F1)

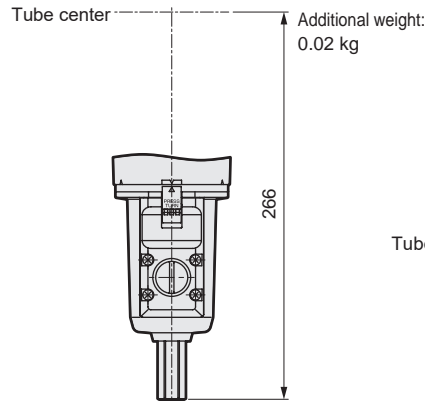

· Attachment  
C-bracket (-BW)  
Part model No.: B820

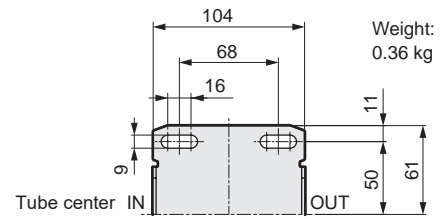

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Air filter Outdoor series

# FW3000/FW4000/FW8000-W Series

A series of outdoor specification products.

● Port size: 1/4 to 1

JISCode



## Specifications

Item	FW3000-W	FW4000-W	FW8000-W
Working fluid	Compressed air		
Max. working pressure MPa	1.0 *1, 2		
Proof pressure MPa	1.5		
Fluid temperature °C	-20 to 60(no freezing)		
Ambient temperature °C	-20 to 60		
Filtration rating μm	5 or 0.3		
Drain capacity cm <sup>3</sup>	45	80	80 (*4)
Port size Rc, NPT, G	1/4, 3/8	1/4, 3/8, 1/2	3/4, 1
Weight kg	0.35	0.55	1.26

\*1: In the case of "F" with auto-drain, the min. working pressure of auto-drain is 0.1MPa. Air is purged with initial drain until pressure reaches 0.1 MPa.

\*2: In the case of "F1" with auto-drain, the min. working pressure of auto-drain is 0.15 MPa.

\*3: When "F", "F1" with auto-drain is selected, be careful of drain freezing.

\*4: Up to 170cm<sup>3</sup> is stored with the manual cock only.


## Option weight

\* Add to the weight of the standard accessories. Unit: kg


Code	Drain discharge		Attachment
	F	F1	BW
FW3000	0.02	0.02	0.17
FW4000	0.02	0.02	0.21
FW8000	0.02	0.02	0.36

## Flow characteristics


● FW3000-8-W

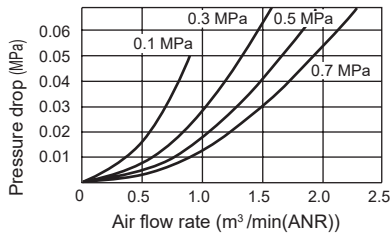


● FW3000-10-W

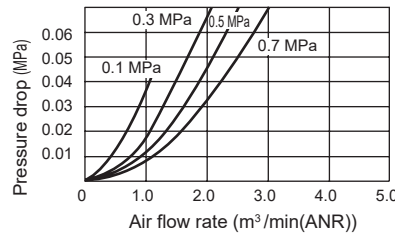


● FW4000-8-W

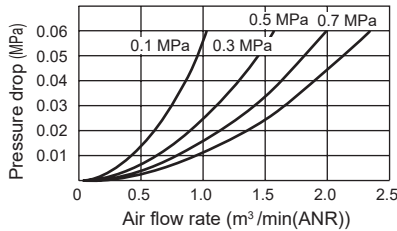


● FW4000-10-W

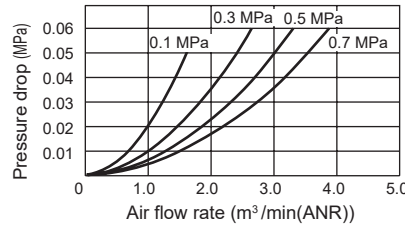


● FW4000-15-W

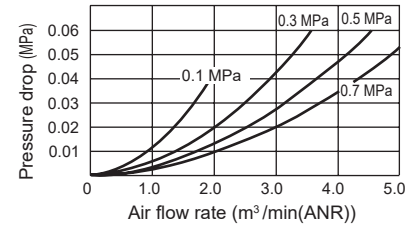

● FW8000-20-W

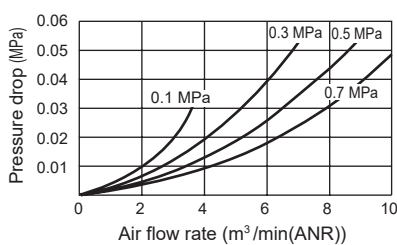


● FW8000-25-W

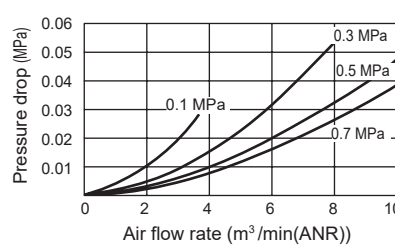

● FW3000  
● FW4000 \*-W-Y (0.3 μm element)  
● FW8000

(Max. processing flow rate)

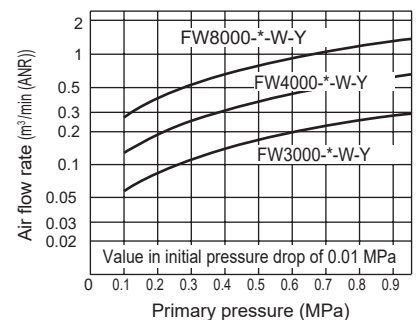




# Air Filter Series

How to order/Internal structure diagram and parts list

## How to order

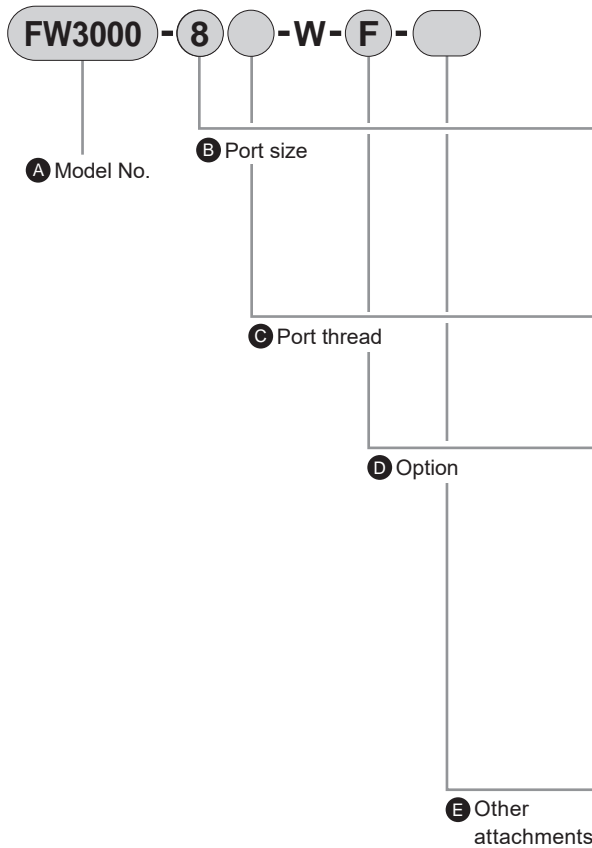


		A Model No.			
		FW3000	FW4000	FW8000	
Code	Description				
<b>B Port size</b>					
8	1/4	●	●		
10	3/8	●	●		
15	1/2		●		
20	3/4			●	
25	1			●	
<b>C Port thread</b>					
		*1, *2			
Blank	Rc thread (pressure unit: MPa temperature display unit: °C)	●	●	●	
N	NPT thread (pressure unit: psi temperature display unit: °F)	●	●	●	
G	G thread (pressure unit: bar temperature display unit: °C)	●	●	●	
<b>D Option</b>					
		*3			
Drain discharge *4	Blank	With manual cock	●	●	●
	F	Auto-drain with manual override (NO: Exhaust when not pressurized)	●	●	●
	F1	Auto-drain with manual override (NC: No exhaust when not pressurized)	●	●	●
Element	Blank	5 μm	●	●	●
	Y	0.3 μm (submicron) *5	●	●	●
Warranty period	Blank	1 year after delivery	●	●	●
	G	3 years after delivery *6 *7 (with inspection certificate, inspection guidelines, traceability system diagram)	●	●	●
Flow Direction	Blank	Standard flow (left → right)	●	●	●
	X1	Reverse flow (right → left)	●	●	●
<b>E Other attachments</b>					
Blank	Not included	●	●	●	
BW	C-bracket	●	●	●	

## ⚠ Precautions for model No. selection

- \*1: G and NPT threads are available for IN, OUT and drain outlet of auto-drain.
- \*2: In compliance with the Measurement Act, the psi display cannot be used in Japan.
- \*3: Select options for the drainage, element, warranty period and flow direction items. When selecting options for several items, list options in order from the top.
- \*4: Refer to "Pneumatic, Vacuum, and Auxiliary Components (Catalog No.CB-024SA)" for the auto-drain use conditions.
- \*5: Refer to page 1 for max. processing flow rate when option "Y" is selected.
- \*6: The warranty period of option G is 3 years from the date of delivery or 1 year from initial use.
- \*7: For option G, the specifications and drawings must be agreed upon.

## Internal structure and parts list

● FW3000-W/FW4000-W ● FW8000-W

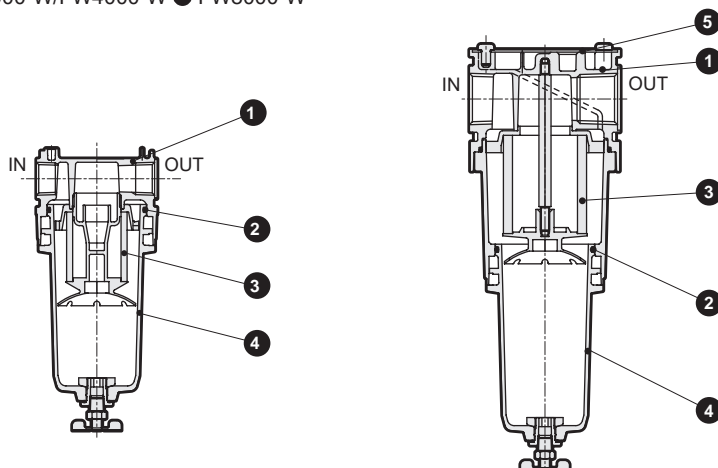


No.	Part name	Material
1	Body	Aluminum alloy die-casting
2	O-ring	Special nitrile rubber
3	Element	Polypropylene
4	Metal bowl assembly	Aluminum alloy die-casting, copper alloy, Zinc alloy die-casting, nitrile rubber
5	Plate cover	Aluminum


# Air Filter Series

## Dimensions

### ● FW3000-W

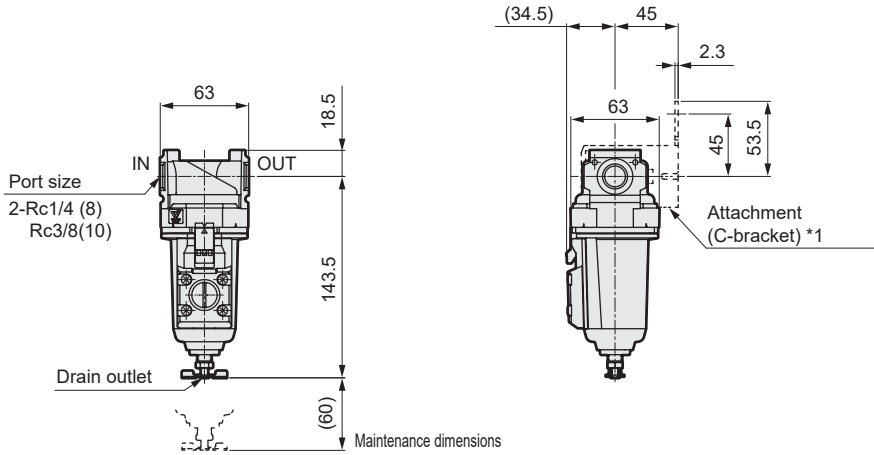


### · Optional dimensions With auto-drain (F, F1)

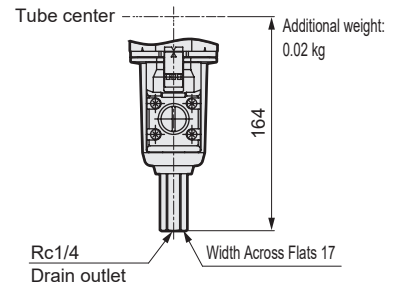


- Attachment  
C-bracket (-BW)  
Part model No.: B320
- Material: Steel  
Zinc plated


\*1: Bracket is an included option.

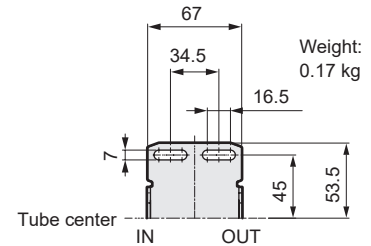

### · Optional dimensions With auto-drain (F, F1)

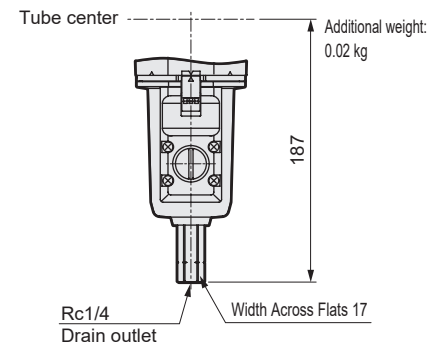


- Attachment  
C-bracket (-BW)  
Part model No.: B420

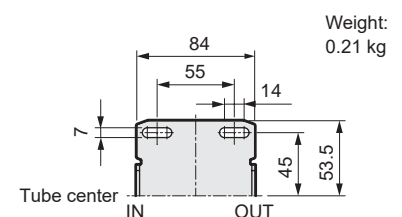


\*1: Bracket is an included option.


### ● FW4000-W

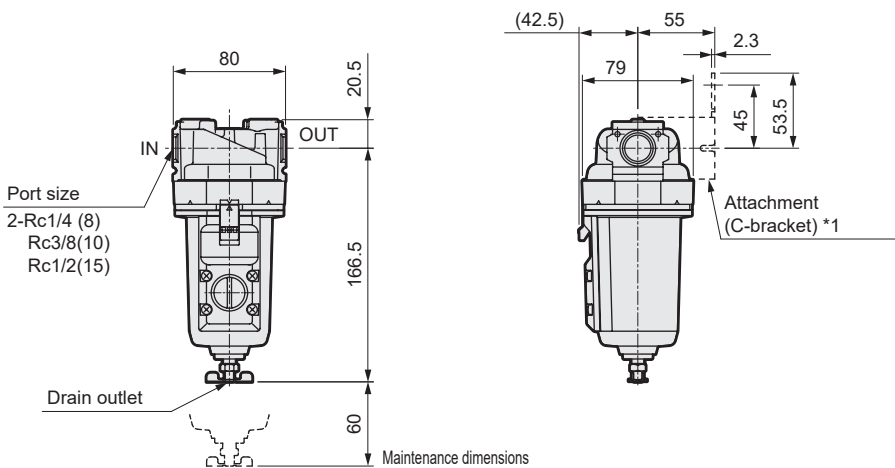

### · Optional dimensions With auto-drain (F, F1)

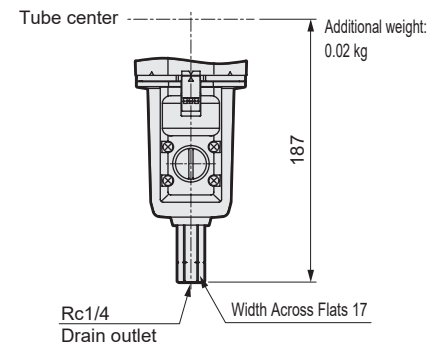

- Attachment  
C-bracket (-BW)  
Part model No.: B420

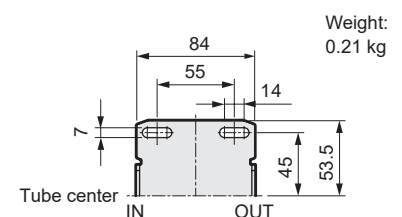


\*1: Bracket is an included option.




### Dimensions

● FW8000-W

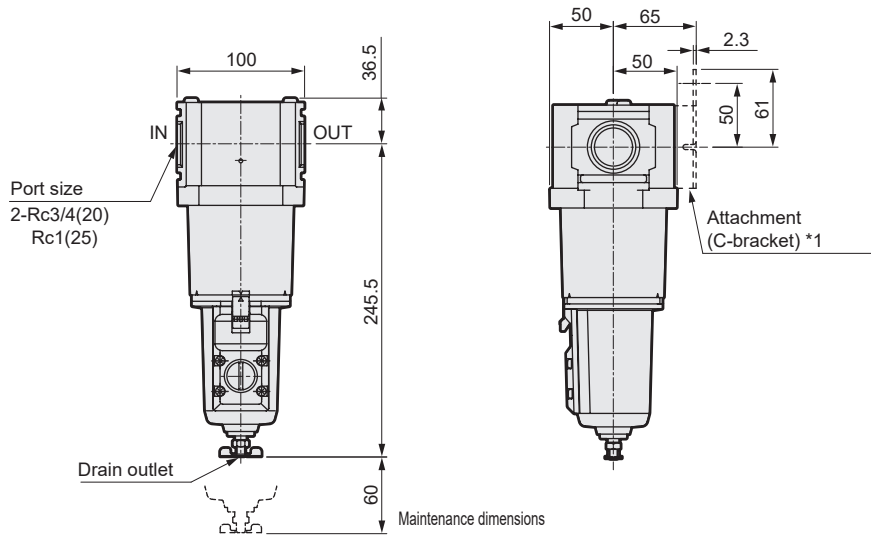


\*1: Bracket is an included option.

· Optional dimensions  
With auto-drain (F, F1)

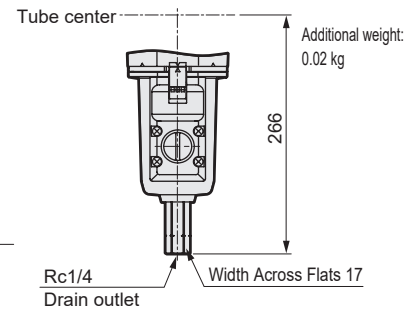

· Attachment  
C-bracket (-BW)  
Part model No.: B820

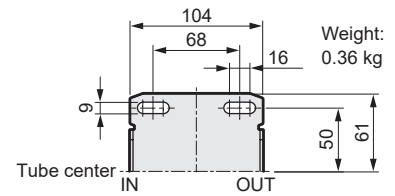

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions




Regulator for outdoor use

# RW3000/RW4000/RW8000-W Series

A series of outdoor specification products.

● Port size: 1/4 to 1



## Specifications

Item	RW3000-W	RW4000-W	RW8000-W
Working fluid	Compressed air		
Max. working pressure MPa	1.0		
Proof pressure MPa	1.5		
Fluid temperature °C	-20 to 60(no freezing)		
Ambient temperature °C	-20 to 60		
Set pressure MPa	0.05 to 0.85		
Pressure relief	With relief mechanism		
Port size Rc, NPT, G	1/4, 3/8	1/4, 3/8, 1/2	3/4, 1
Weight kg	0.5	0.75	1.65


## Option weight

\* Add to the weight of the standard accessories. Unit: kg


Code	Knob	Attachment
	K	BW
RW3000	0.1	0.17
RW4000	0.1	0.21
RW8000	0.1	0.36

## Flow characteristics


● RW3000-8-W

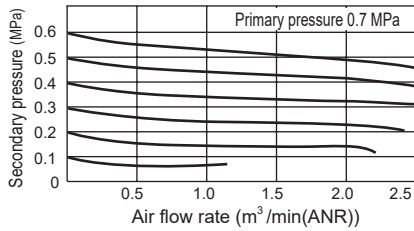


● RW3000-10-W

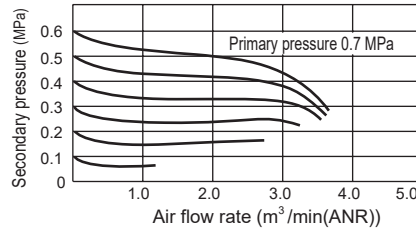


● RW4000-8-W

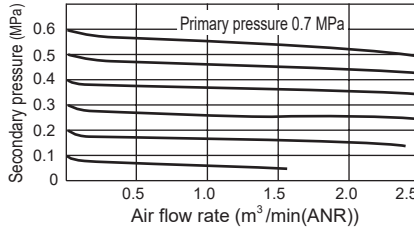


● RW4000-10-W

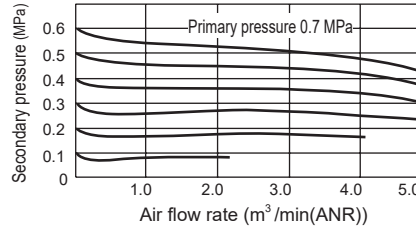


● RW4000-15-W

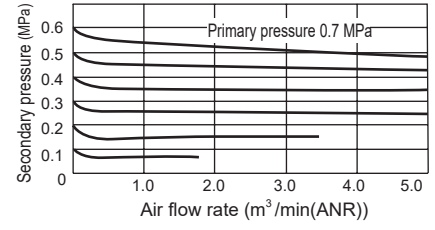

● RW8000-20-W

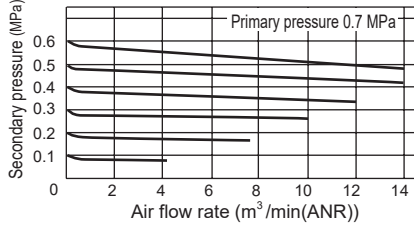


● RW8000-25-W

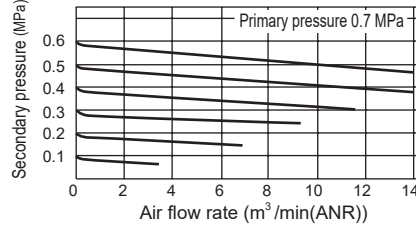


## Pressure characteristics


● RW3000-W

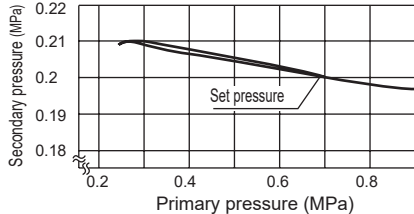

● RW4000-W

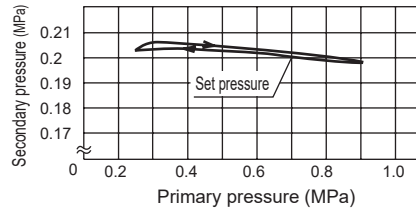

● RW8000-W

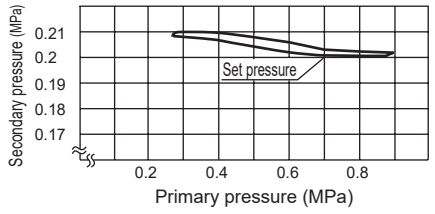




# Regulator series

How to order/Internal structure diagram and parts list

## How to order

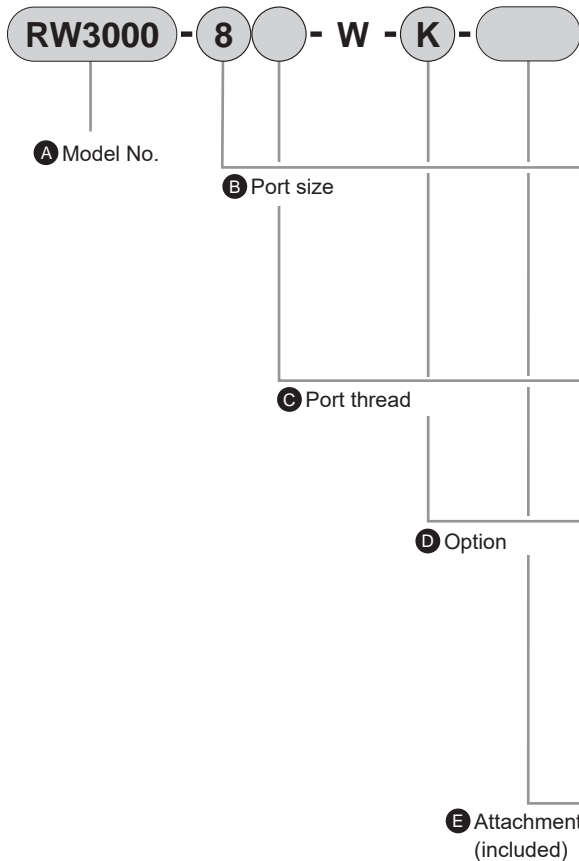


		A Model No.			
		RW3000	RW4000	RW8000	
Code	Description				
<b>B Port size</b>					
8	1/4	●	●		
10	3/8	●	●		
15	1/2		●		
20	3/4			●	
25	1			●	
<b>C Port thread</b>					
		*1, *2			
Blank	Rc thread (pressure unit: MPa temperature display unit: °C)	●	●	●	
N	NPT thread (pressure unit: psi temperature display unit: °F)	●	●	●	
G	G thread (pressure unit: bar temperature display unit: °C)	●	●	●	
<b>D Option</b>					
		*3 *4			
Knob	Blank	Without knob	●	●	●
	K	With knob	●	●	●
guarantee period	Blank	1 year after delivery	●	●	●
	G	3 years after delivery (with inspection certificate, inspection guidelines, traceability system diagram)	●	●	●
Flow Direction	Blank	Standard flow (left → right)	●	●	●
	X1	Reverse flow (right → left)	●	●	●
<b>E Other attachments</b>					
Blank	Not included	●	●	●	
BW	C-bracket	●	●	●	
GW49P	Pressure gauge (GW49D-6-P10)	*6	●	●	

## ⚠ Precautions for model No. selection

- \*1: G and NPT threads are available for IN, OUT and gauge ports.
- \*2: In compliance with the Measurement Act, the psi display cannot be used in Japan.
- \*3: Select options for the knob, warranty period and flow direction. When selecting options for several items, list options in order from the top.
- \*4: The warranty period of option G is 3 years from the date of delivery or 1 year from initial use.
- \*5: For option G, the specifications and drawings must be agreed upon.
- \*6: The pressure gauge cannot be attached when using NPT threads or G threads. (Consult with CKD if required.)

## Internal structure and parts list

● RW3000-W/RW4000-W ● RW8000-W

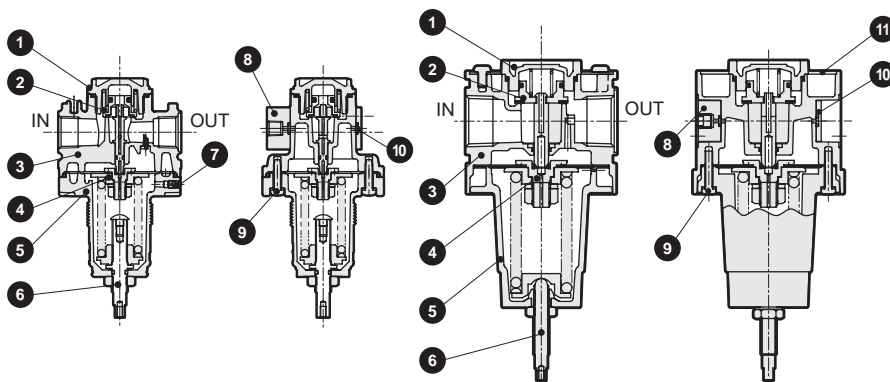



No.	Part name	Material
1	Bottom plug	Aluminum alloy die-casting
2	Valve assembly	Copper alloy, hydrogenated nitrile rubber (polyacetal resin: RW3000, RW4000)
3	Body	Aluminum alloy die-casting
4	Diaphragm assembly	Stainless steel, nitrile rubber, aluminum
5	Cover	Aluminum alloy die-casting
6	Adjusting screw assembly	Stainless steel (aluminum, nitrile rubber, polyacetal resin: RW3000, RW4000)
7	Plug	Stainless steel
8	Gauge plug assembly	Aluminum, nitrile rubber, stainless steel
9	Screws	Stainless steel
10	Seal plug assembly	Aluminum, nitrile rubber, stainless steel
11	Plate cover	Aluminum

Drain separator  
F.R.L. unit  
Pneumatic auxiliary components  
Pneumatic valves  
Fluid control valves  
Pneumatic cylinders  
Related products  
Safety precautions

# Regulator Series


## Dimensions

### ● RW3000-W

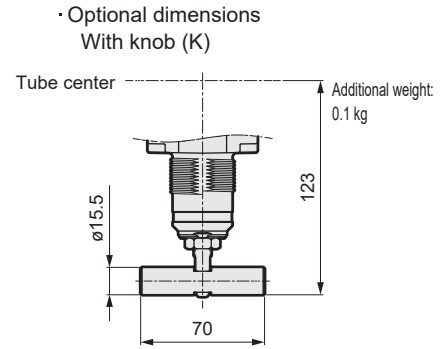
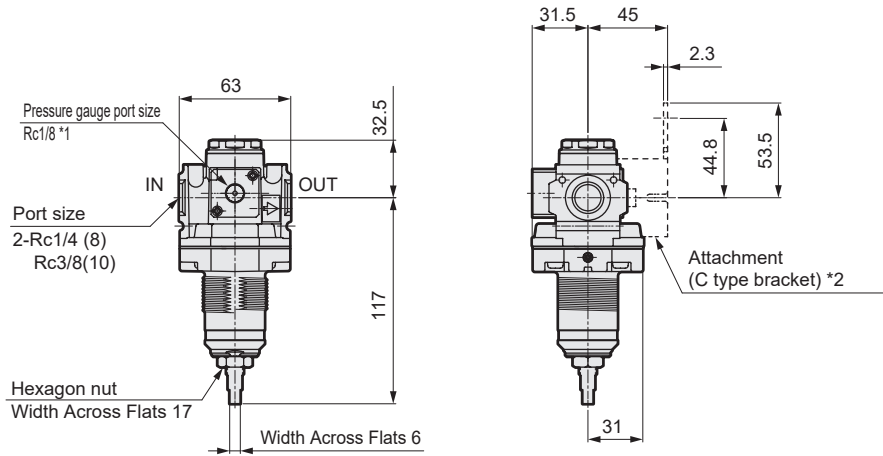


- Attachment C-bracket (-BW)  
Part model No.: B320
- Material: Steel Zinc plated

- \*1: The pressure gauge connection port is left open when shipped. Use the included pipe plug when sealing.
- \*2: Bracket is optionally included.
- \*3: Dimensions at the setting pressure of 0 MPa

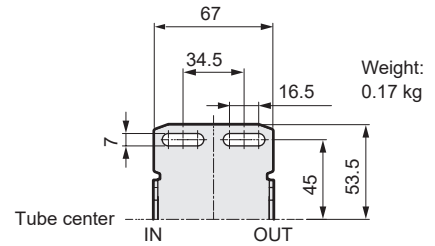


### ● RW4000-W

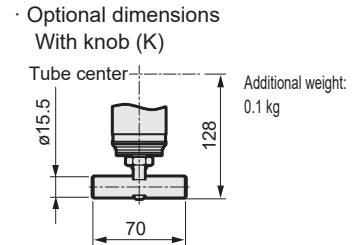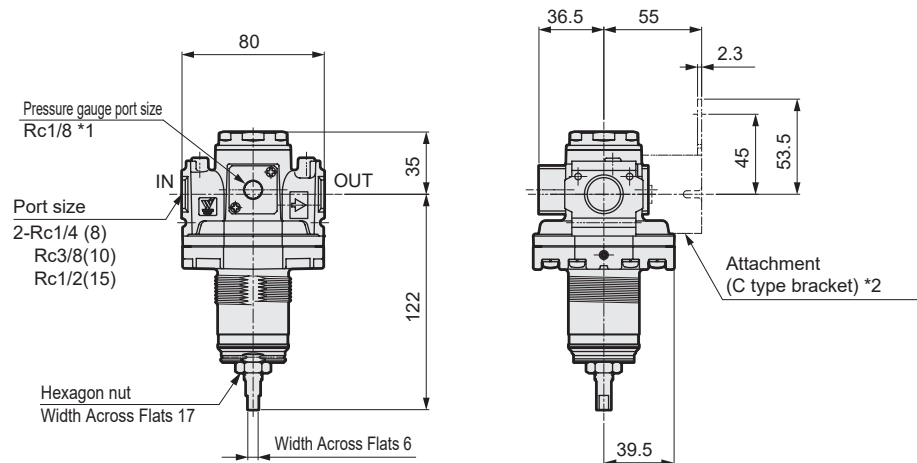


- Attachment C-bracket (-BW)  
Part model No.: B420

- \*1: The pressure gauge connection port is left open when shipped. Use the included pipe plug when sealing.
- \*2: Bracket is optionally included.
- \*3: Dimensions at the setting pressure of 0 MPa

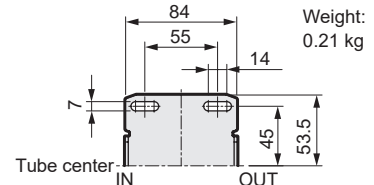


### Dimensions


● RW8000-W

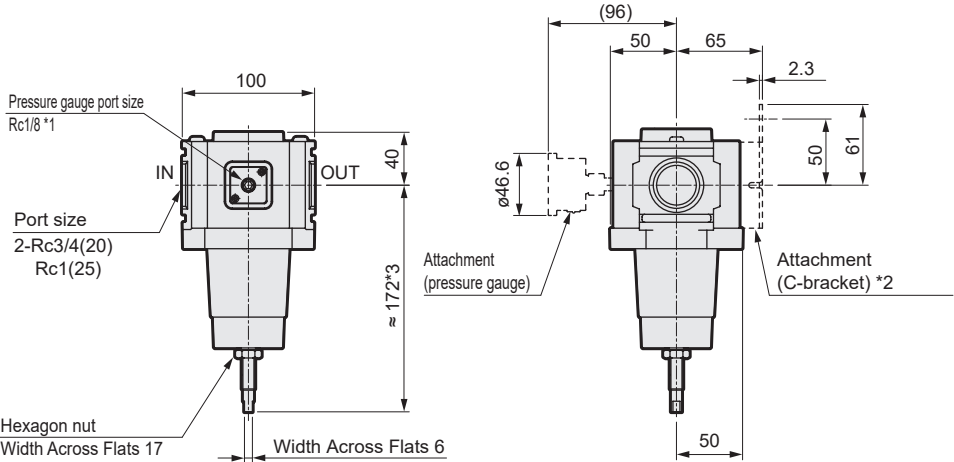

· Optional dimensions With knob (K)



· Attachment C-bracket (-BW) Part model No.: B820

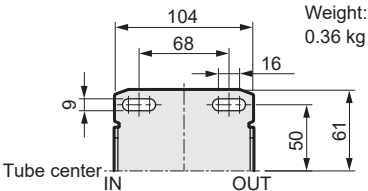

\*1: The pressure gauge connection port is left open when shipped. Use the included pipe plug when sealing.  
\*2: Bracket is optionally included.  
\*3: Dimensions at the setting pressure of 0 MPa

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves


Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions





Lubricator Outdoor Series

# LW3000/LW4000/LW8000-W Series

Supplies fine oil mist.

● Port size: 1/4 to 1

JISCode



## Specifications


Item	LW3000-W	LW4000-W	LW8000-W
Working fluid	Compressed air		
Max. working pressure MPa	1.0		
Proof pressure MPa	1.5		
Fluid temperature °C	5 to 60(no freezing)		
Ambient temperature °C	-10Up to 60		
Min. drip flow rate m <sup>3</sup> /min(ANR)	0.03	0.065	
Oil storage capacity cm <sup>3</sup>	85	170	170(MAX360) *2
Oil used	Turbine oil Class 1 ISO VG32 (spindle oil cannot be used)		
Port size Rc, NPT, G	1/4, 3/8	1/4, 3/8, 1/2 (3/4 uses an adaptor)	3/4, 1 (1 1/4 uses an adaptor)
Weight kg	0.38	0.55	1.5

\*1: The min. drip flow is that at which five drops of turbine oil drip per minute at the primary pressure of 0.5 MPa and inlet air temperature of 20°C. (It cannot be used for dry fog.)


\*2: When lubricating from the filling plug, set 300cm<sup>3</sup> or less below the top of the cup window.

## Flow characteristics


● LW3000-8-W

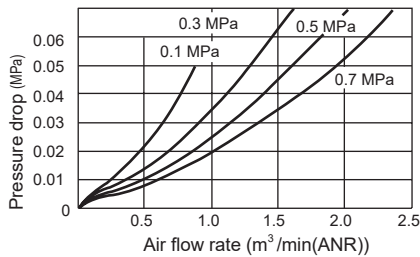


● LW3000-10-W

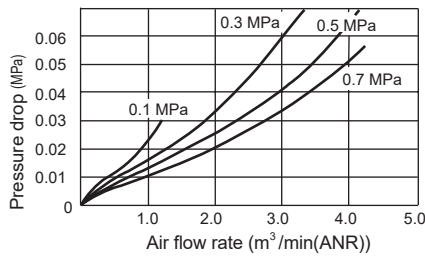


● LW4000-8-W

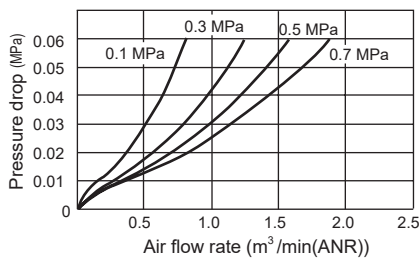


● LW4000-10-W

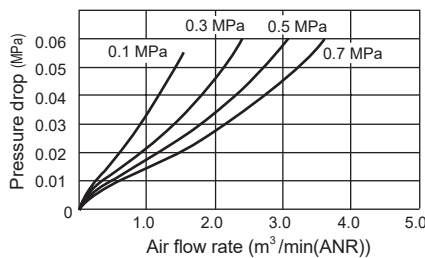


● LW4000-15-W

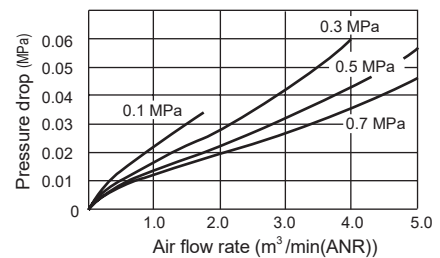


● LW8000-20-W

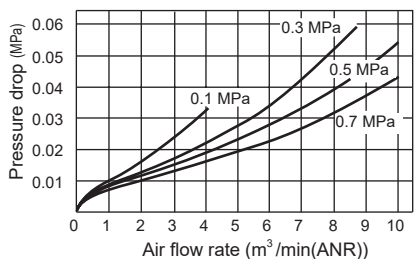


● LW8000-25-W

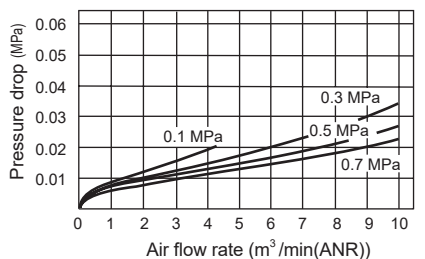

## Oil drip rate

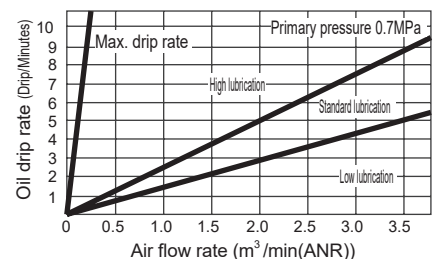

### How to order



**A** Model No.

**B** Port size

**C** Port thread

**D** Option

**E** Bracket (Included)

\* Refer to "Pneumatic, Vacuum and Auxiliary Components (Catalog No.CB-024SA)" for options.


		A Model No.			
		LW3000	LW4000	LW8000	
Code	Description				
<b>B Port size</b>					
8	1/4	●	●		
10	3/8	●	●		
15	1/2		●		
20	3/4			●	
25	1			●	
<b>C Port thread</b> *1, *3					
Blank	Rc thread	●	●	●	
N	NPT thread	●	●	●	
G	G thread	●	●	●	
<b>D Option</b> *2					
Drain	Blank	Without manual cock	●	●	●
Discharge	C	With manual cock	●	●	●
guarantee period	Blank	1 year after delivery	●	●	●
	G	3 years after delivery *4 *5 (with inspection certificate, inspection guidelines, traceability system diagram)	●	●	●
Flow Direction	Blank	Standard flow (left → right)	●	●	●
	X1	Reverse flow (right → left)	●	●	●
<b>E Bracket (included)</b>					
Blank	Not included	●	●	●	
BW	C-bracket	●	●	●	

### ⚠ Precautions for model No. selection

- \*1: G and NPT threads are available for IN and OUT.
- \*2: When selecting options for several items, list options in order from the top.
- \*3: In compliance with the Measurement Act, the psi display cannot be used in Japan.
- \*4: The warranty period of option G is 3 years from the date of delivery or 1 year from initial use.
- \*5: For option G, the specifications and drawings must be agreed upon.

### Internal structure and parts list

● LW3000-W/LW4000-W ● LW8000-W

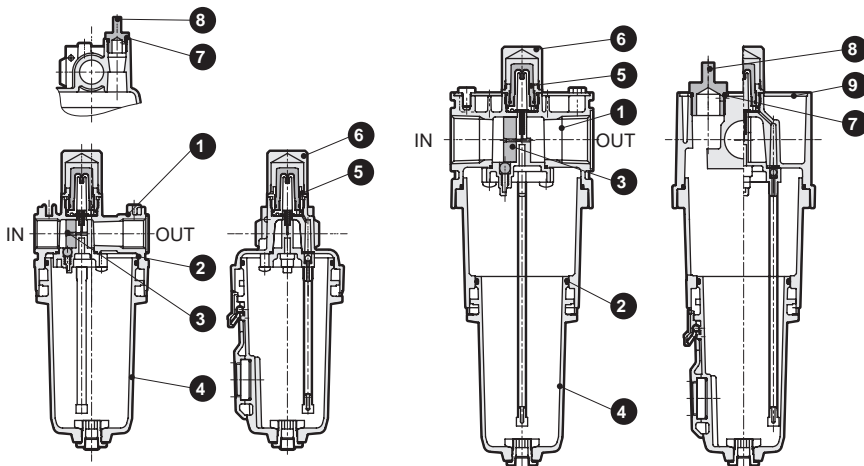



No.	Part name	Material
1	Body	Aluminum alloy die-casting
2	O-ring	Special nitrile rubber
3	Flow guide	Nitrile rubber
4	Metal bowl assembly	Aluminum alloy die-casting, Zinc alloy die-casting, stainless steel
5	Adjusting dome Assembly	Stainless steel, nitrile rubber, Polycarbonate resin
6	Dome cover	Aluminum
7	O-ring	Nitrile rubber
8	Filling plug	Stainless steel
9	Plate cover	Aluminum

# Lubricator Series


## Dimensions

### ● LW3000-W

- Optional dimensions  
With manual petcock (C)


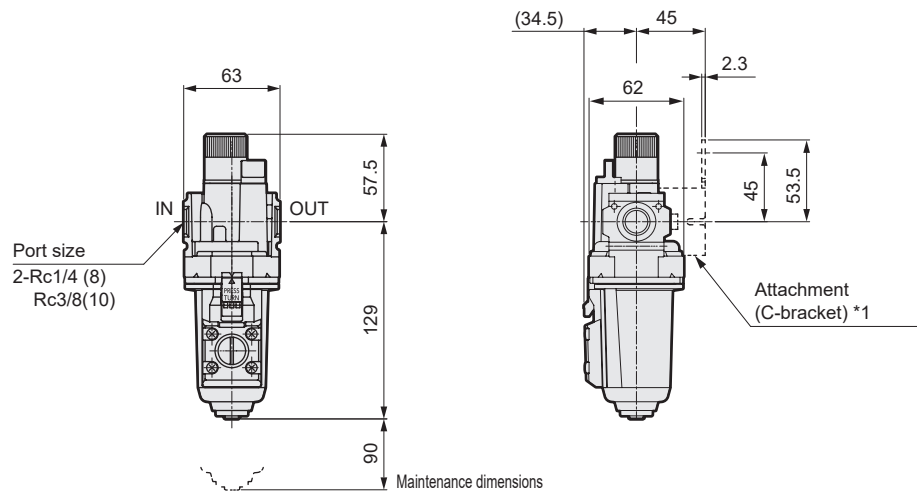


- Attachment  
C-bracket (-BW)  
Part model No.: B320
- Material: Steel Zinc plated

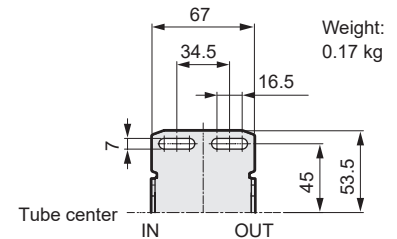


### ● LW4000-W

- Optional dimensions  
With manual petcock (C)

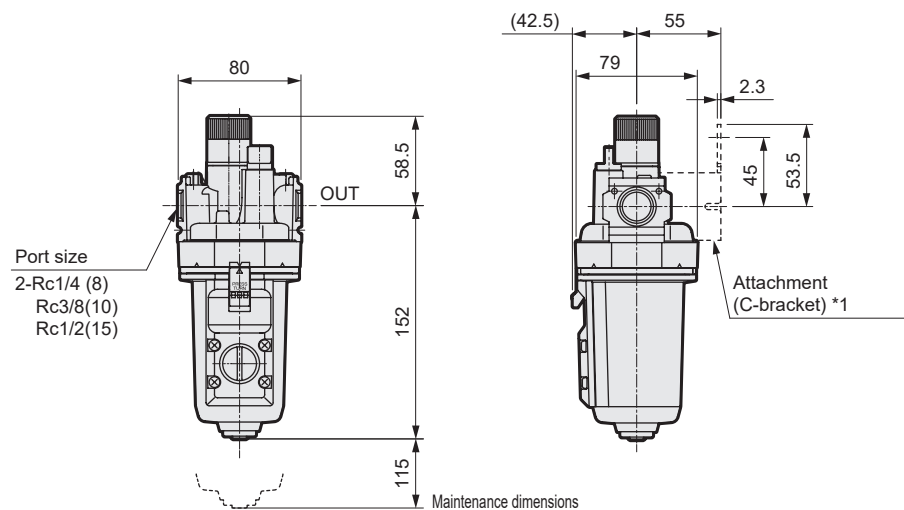


- Attachment  
C-bracket (-BW)  
Part model No.: B420

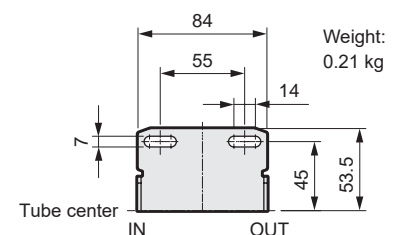




## Dimensions

● LW8000-W

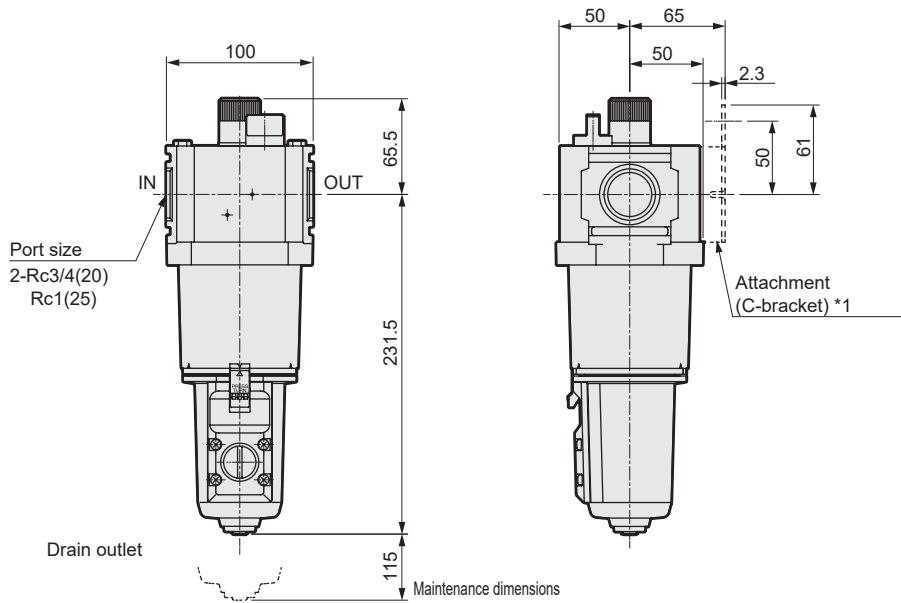


\*1: Bracket is an included option.


· Optional dimensions  
With manual petcock (C)



· Attachment  
C-bracket (-BW)  
Part model No.: B820

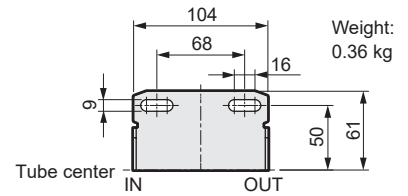

Drain separator F.R.L. unit
Pneumatic auxiliary components
Pneumatic valves
Fluid control valves
Pneumatic cylinders
Related products
Safety precautions



Oil mist filter for outdoor use

# MW3000/MW4000/MW8000-W Series

A series of outdoor specification products.

● Port size: 1/4 to 1

JISCode



## Specifications

Item	MW3000-W	MW4000-W	MW8000-W
Working fluid	Compressed air		
Working pressure MPa	0.1 to 1.0 *2		
Proof pressure MPa	1.5		
Drain capacity cm <sup>3</sup>	45	80	80
Port size Rc,NPT, G	1/4, 3/8	1/4, 3/8, 1/2	3/4, 1
Weight kg	0.38	0.62	1.45

## Option weight

\* Add to the weight of the standard accessories. Unit: kg

Code	Drain discharge	Attachment
	F1	BW
MW3000	0.02	0.17
MW4000	0.02	0.21
MW8000	0.02	0.36

Mantle option name	Blank (M type)	S (S type)
Max. processing flow rate *1 ℓ/min (ANR)	360	450
Primary pressure 0.7 MPa/hour	825	1000
	2600	2900
Fluid temperature °C	-20 to 60(no freezing)	
Ambient temperature °C	-20 to 60	
Filtration rating μm	0.01 (nominal)	0.3
Secondary side oil concentration mg/m <sup>3</sup>	0.01 or less (0.1 or less after oil saturation) *3, *4	0.5 or less *3
Mantle (element) change	1 year (6000 hours) or pressure drop 0.1 MPa	

\*1: Use within the max. processing flow rate. If the max. processing flow rate is exceeded temporarily, or if the filter is installed at a location with high levels of pulsation, the mantle could be damaged or oil or drainage, etc., could splatter to the secondary side and result in a terminal malfunction.


\*2: In the case of "F1" with auto-drain, the min. working pressure is 0.15 MPa.  
\*3: The secondary oil concentration is the value when the primary oil concentration is 30 mg/m<sup>3</sup> and inlet air temperature is 21°C.

\*4: Install an oil mist filter (S type) as a pre-filter on the primary side to prevent early clogging.


\*5: In the case of "F1" with auto-drain, be careful of freezing the drain.

## Flow characteristics (max. processing flow rate)

● MW\*000-W-M

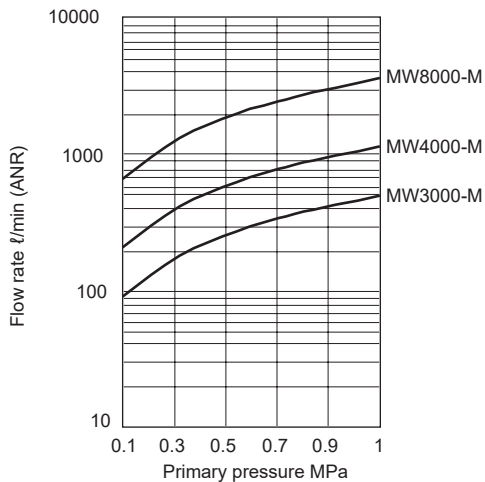

● MW\*000-W-S

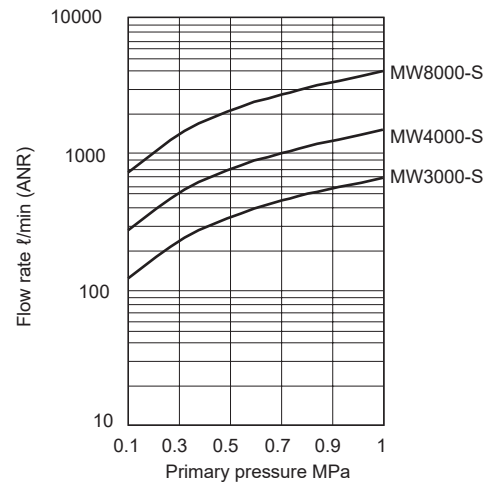

# Oil Mist Filter Series

How to order/Internal structure diagram and parts list

## How to order



**A** Model No.

**B** Port size

**C** Port thread

**D** Option

**E** Other attachments

**A** Model No.

MW3000

MW4000

MW8000


Code	Description	MW3000	MW4000	MW8000	
<b>B Port size</b>					
8	1/4	●	●		
10	3/8	●	●		
15	1/2		●		
20	3/4			●	
25	1			●	
<b>C Port thread</b>					
*1, *2					
Blank	Rc thread (pressure unit: MPa temperature display unit: °C)	●	●	●	
N	NPT thread (pressure unit: psi temperature display unit: °F)	●	●	●	
G	G thread (pressure unit: bar temperature display unit: °C)	●	●	●	
<b>D Option</b>					
*3					
Drain discharge *4 *5	Blank	With manual cock	●	●	●
	F1	Auto-drain with manual override (NC: No exhaust w/o pressurization)	●	●	●
Mantle (Element)	Blank	M type (nominal 0.01 μm; remaining oil 0.01mg/m <sup>3</sup> )	●	●	●
	S	S type (nominal 0.3 μm; remaining oil 0.5mg/m <sup>3</sup> )	●	●	●
guarantee period	Blank	1 year after delivery	●	●	●
	G	3 years after delivery *6 *7 (with inspection certificate, inspection guidelines, traceability system diagram)	●	●	●
Flow Direction	Blank	Standard flow (left → right)	●	●	●
	X1	Reverse flow (right → left)	●	●	●
<b>E Other attachments</b>					
Blank	Not included	●	●	●	
BW	C-bracket	●	●	●	

## ⚠ Precautions for model No. selection

- \*1: G and NPT threads are available for IN, OUT and drain outlet of auto-drain.
- \*2: In compliance with the Measurement Act, the psi display cannot be used in Japan.
- \*3: Select options for the drainage, mantle, warranty period and flow direction. When selecting options for several items, list options in order from the top.
- \*4: NO auto-drain cannot be selected.
- \*5: Refer to "Pneumatic, Vacuum, and Auxiliary Components (Catalog No.CB-024SA)" for the auto-drain use conditions.
- \*6: The warranty period of option G is 3 years from the date of delivery or 1 year from initial use.
- \*7: For option G, the specifications and drawings must be agreed upon.

## Internal structure and parts list

● MW3000-W/MW4000-W ● MW8000-W

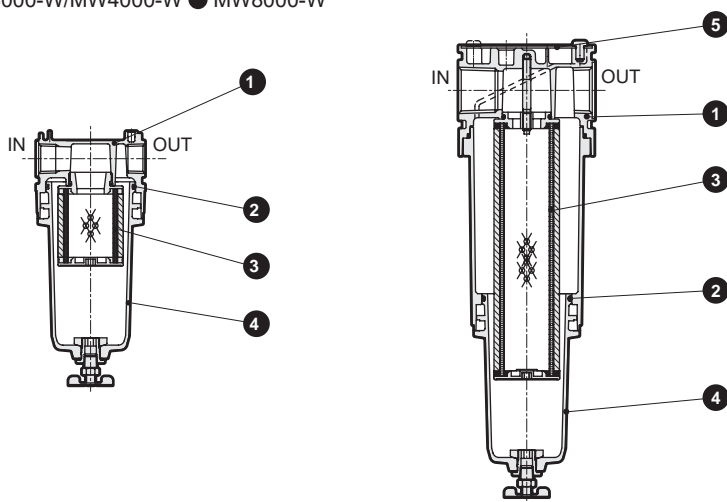


No.	Part name	Material
1	Body	Aluminum alloy die-casting
2	O-ring	Special nitrile rubber
3	Mantle assembly	-
4	Metal bowl assembly	Aluminum alloy die-casting, copper alloy, Zinc alloy die-casting, nitrile rubber
5	Plate cover	Aluminum

Drain separator  
F.R.L. unit  
Pneumatic auxiliary components  
Pneumatic valves  
Fluid control valves  
Pneumatic cylinders  
Related products  
Safety precautions


# Oil Mist Filter Series

## Dimensions


### ● MW3000-W

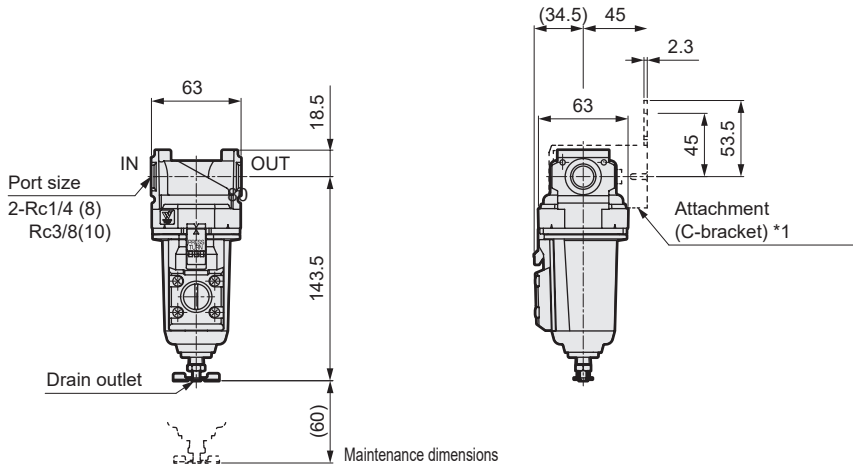

· Optional dimensions  
With auto-drain (F1)

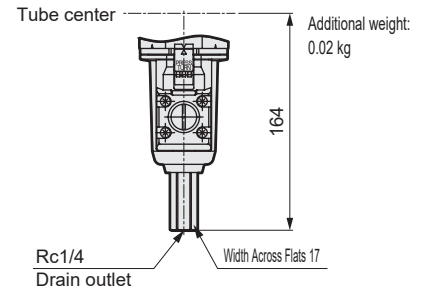


· Attachment  
C-bracket (-BW)  
Part model No.: B320  
· Material: Steel Zinc plated

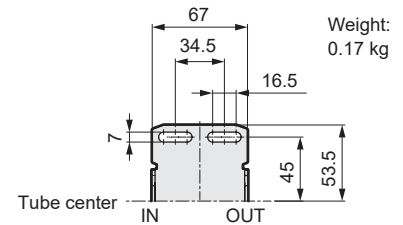


\*1:Bracket is an included option.


### ● MW4000-W

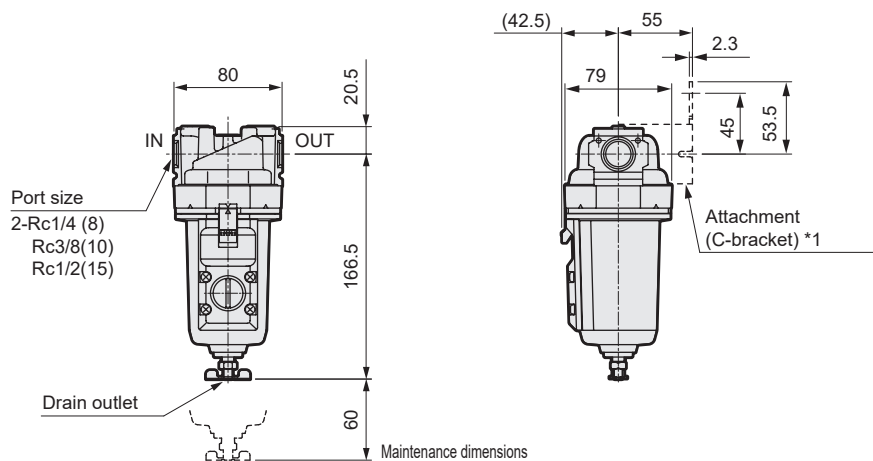

· Optional dimensions  
With auto-drain (F1)

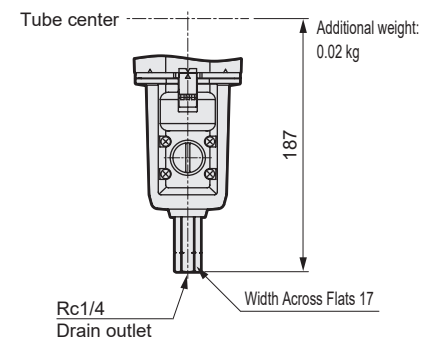

· Attachment  
C-bracket (-BW)  
Part model No.: B420

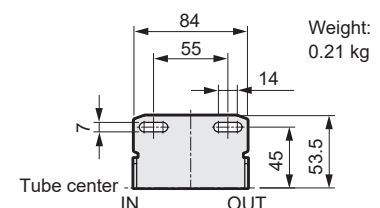


\*1:Bracket is an included option.




### Dimensions

● MW8000-W

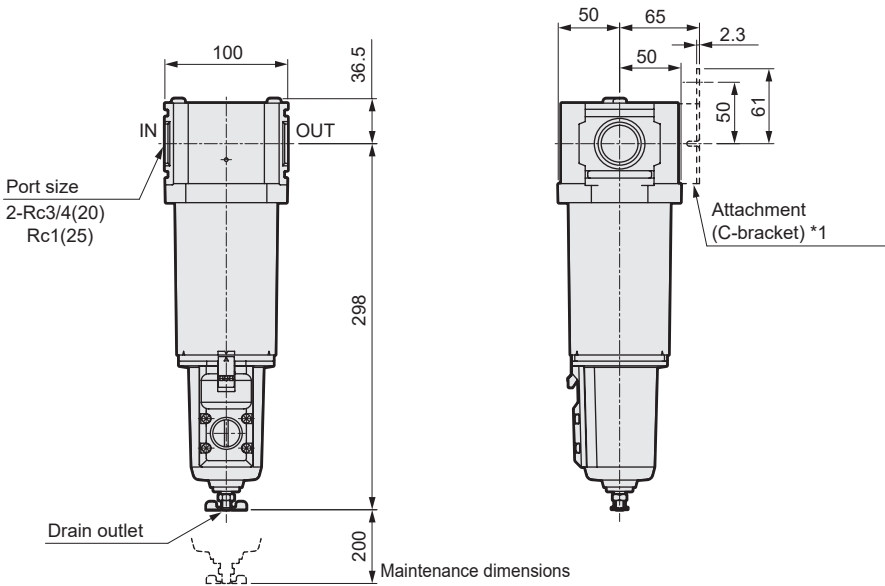


\*1: Bracket is an included option.

· Optional dimensions  
With auto-drain (F1)

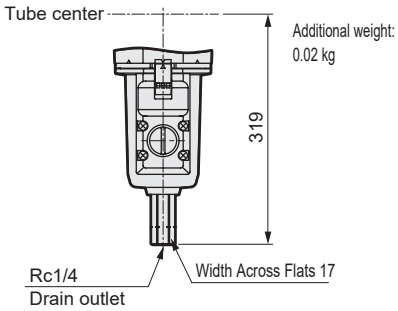

· Attachment  
C-bracket (-BW)  
Part model No.: B820

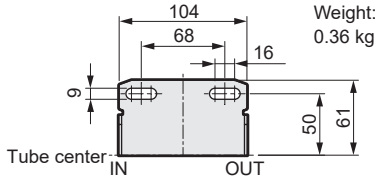

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Filter/regulator for outdoor use

# WW3000/WW4000/WW8000-W Series

A series of outdoor specification products.

● Port size: 1/4 to 1

JISCode



## Specifications

Item	WW3000-W	WW4000-W	WW8000-W
Working fluid	Compressed air		
Max. working pressure MPa	1.0 *1, 2		
Proof pressure MPa	1.5		
Fluid temperature °C	-20 to 60(no freezing)		
Ambient temperature °C	-20 to 60		
Filtration rating μm	5 or 0.3		
Set pressure MPa	0.05 to 0.85		
Pressure relief	With relief mechanism		
Drain capacity cm <sup>3</sup>	45	80	80 (*3)
Port size Rc, NPT, G	1/4, 3/8, 1/2	1/4, 3/8, 1/2	3/4, 1
Weight kg	0.8	1.1	2.3

## Option weight

\* Add to the weight of the standard accessories. Unit: kg

Code	Drain discharge		Knob	Attachment
	F	F1	K	BW
WW3000	0.02	0.02	0.1	0.17
WW4000	0.02	0.02	0.1	0.21
WW8000	0.02	0.02	0.1	0.36

\*1: In the case of "F" with auto-drain, the min. working pressure of auto-drain is 0.1 MPa. Air is purged with initial drainage until pressure reaches 0.1 MPa.


\*2: In the case of "F1" with auto-drain, the min. working pressure of auto-drain is 0.15MPa.

\*3: Up to 170cm<sup>3</sup> is stored with the manual cock only.


\*4: When "F" or "F1" with auto-drain is selected, be careful of drain freezing.

## Flow characteristics


● WW3000-8-W

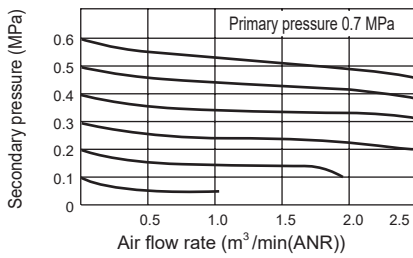


● WW3000-10-W/WW3000-15-W

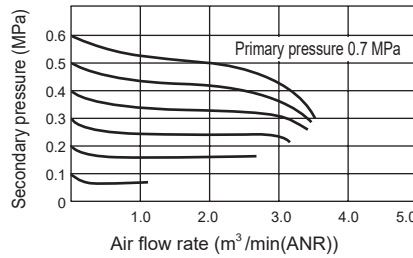


● WW4000-8-W

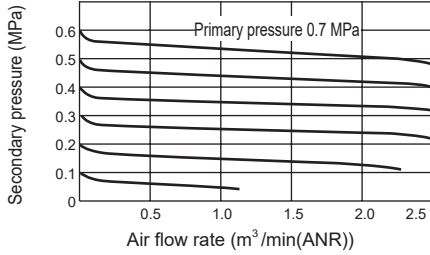


● WW4000-10-W

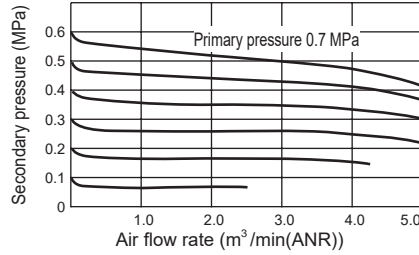


● WW4000-15-W

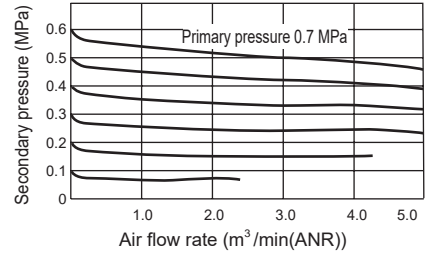

● WW8000-20-W

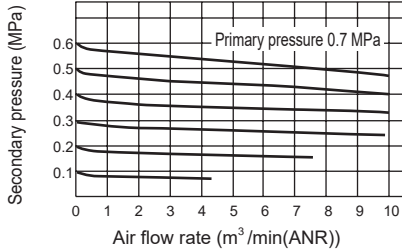


● WW8000-25-W

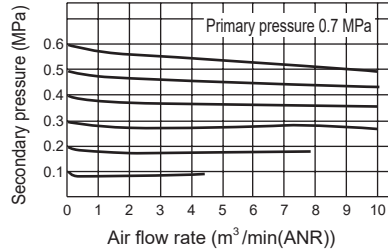


## Pressure characteristics


● WW3000-W

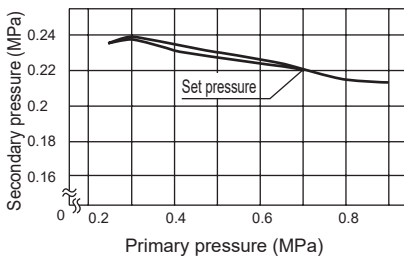

● WW4000-W

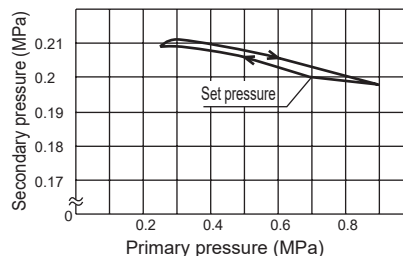


● WW8000-W

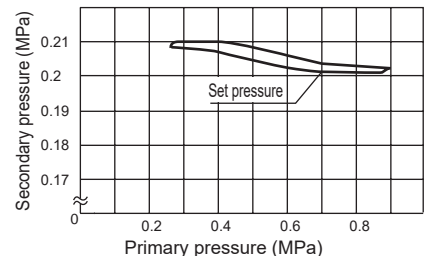

# Filter/Regulator Series

How to order/Internal structure diagram and parts list

## How to order

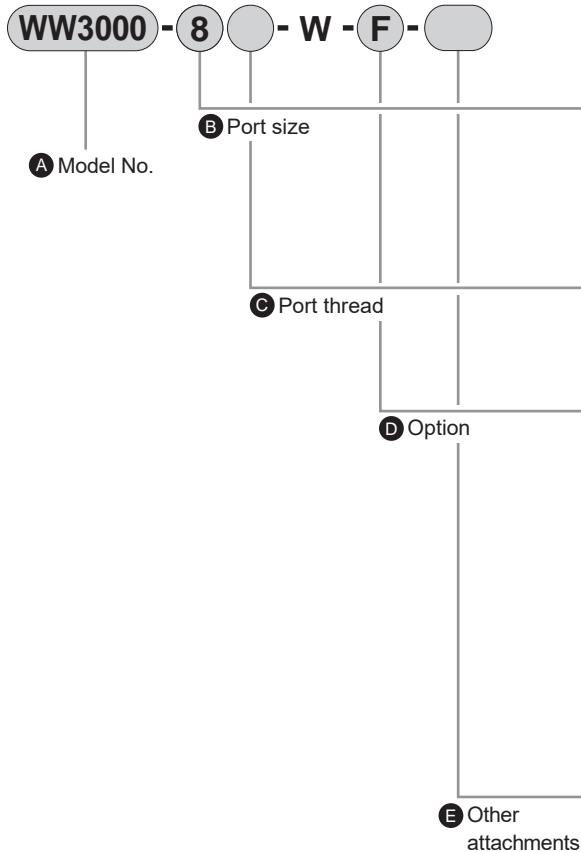


		<b>A Model No.</b>			
		WW3000	WW4000	WW8000	
Code	Description				
<b>B Port size</b>					
8	1/4	●	●		
10	3/8	●	●		
15	1/2	●	●		
20	3/4			●	
25	1			●	
<b>C Port thread</b>					
		*1, *2			
Blank	Rc thread (pressure unit: MPa temperature display unit: °C)	●	●	●	
N	NPT thread (pressure unit: psi temperature display unit: °F)	●	●	●	
G	G thread (pressure unit: bar temperature display unit: °C)	●	●	●	
<b>D Option</b>					
		*3 *4			
Drain discharge *4	Blank	With manual cock	●	●	●
	F	Auto-drain with manual override (NO: Exhaust when not pressurized)	●	●	●
	F1	Auto-drain with manual override (NC: No exhaust when not pressurized)	●	●	●
Element	Blank	5 μm	●	●	●
	Y	0.3 μm (submicron) *5	●	●	●
Knob	Blank	Without knob	●	●	●
	K	With knob	●	●	●
guarantee period	Blank	1 year after delivery	●	●	●
	G	3 years after delivery *6 *7 (with inspection certificate, inspection guidelines, traceability system diagram)	●	●	●
Flow Direction	Blank	Standard flow (left → right)	●	●	●
	X1	Reverse flow (right → left)	●	●	●
<b>E Other attachments</b>					
Blank	Not included	●	●	●	
BW	C-bracket	●	●	●	
GW49P	Pressure gauge (GW49D-6-P10) *8	●	●	●	

## ⚠ Precautions for model No. selection

- \*1: G and NPT threads are available for IN, OUT, gauge port and drain outlet of auto-drain.
- \*2: In compliance with the Measurement Act, the psi display cannot be used in Japan.
- \*3: Select options for the drainage, element, knob, warranty period and flow direction items. When selecting options for several items, list options in order from the top.
- \*4: Refer to "Pneumatic, Vacuum, and Auxiliary Components (Catalog No.CB-024SA)" for the auto-drain use conditions.
- \*5: Refer to page 7 for max. processing flow rate when option "Y" is selected.
- \*6: The warranty period of option G is 3 years from the date of delivery or 1 year from initial use.
- \*7: For option G, the specifications and drawings must be agreed upon.
- \*8: The pressure gauge cannot be attached when using NPT threads or G threads. (Consult with CKD if required.)

## Internal structure diagram and parts list

● WW3000-W/WW4000-W ● WW8000-W

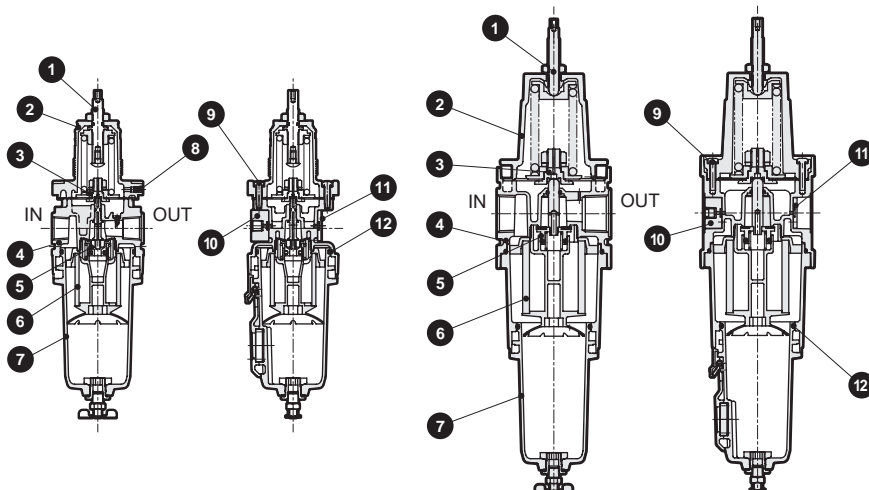

No.	Part name	Material
1	Adjusting screw assembly	Stainless steel (aluminum, nitrile rubber, polyacetal resin: WW3000, WW4000)
2	Cover	Aluminum alloy die-casting
3	Diaphragm assembly	Stainless steel, nitrile rubber, aluminum
4	Body	Aluminum alloy die-casting
5	Valve assembly	Copper alloy, hydrogenated nitrile rubber (polyacetal resin: WW3000, WW4000)
6	Element	Polypropylene
7	Metal bowl assembly	Aluminum alloy die-casting, copper alloy, Zinc alloy die-casting, nitrile rubber
8	Plug	Stainless steel
9	Screws	Stainless steel
10	Gauge plug assembly	Aluminum, nitrile rubber, stainless steel
11	Seal plug assembly	Aluminum, nitrile rubber, stainless steel
12	O-ring	Special nitrile rubber


Drain separator  
F.R.L. unit  
Pneumatic auxiliary components  
Pneumatic valves  
Fluid control valves  
Pneumatic cylinders  
Related products

Safety precautions

# Filter/Regulator Series


## Dimensions

### ● WW3000-W

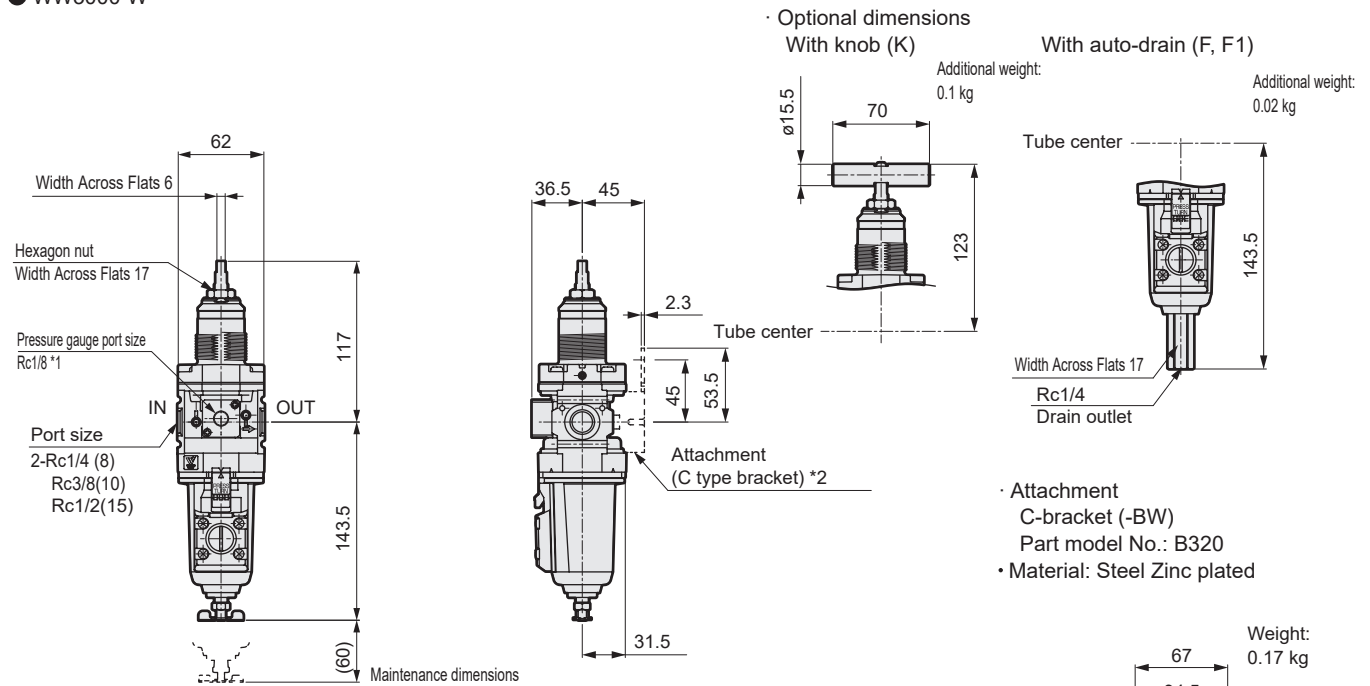

- \*1: The pressure gauge connection port is left open when shipped. Use the included pipe plug when sealing.
- \*2: Bracket is optionally included.
- \*3: Dimensions at the setting pressure of 0 MPa

### ● WW4000-W

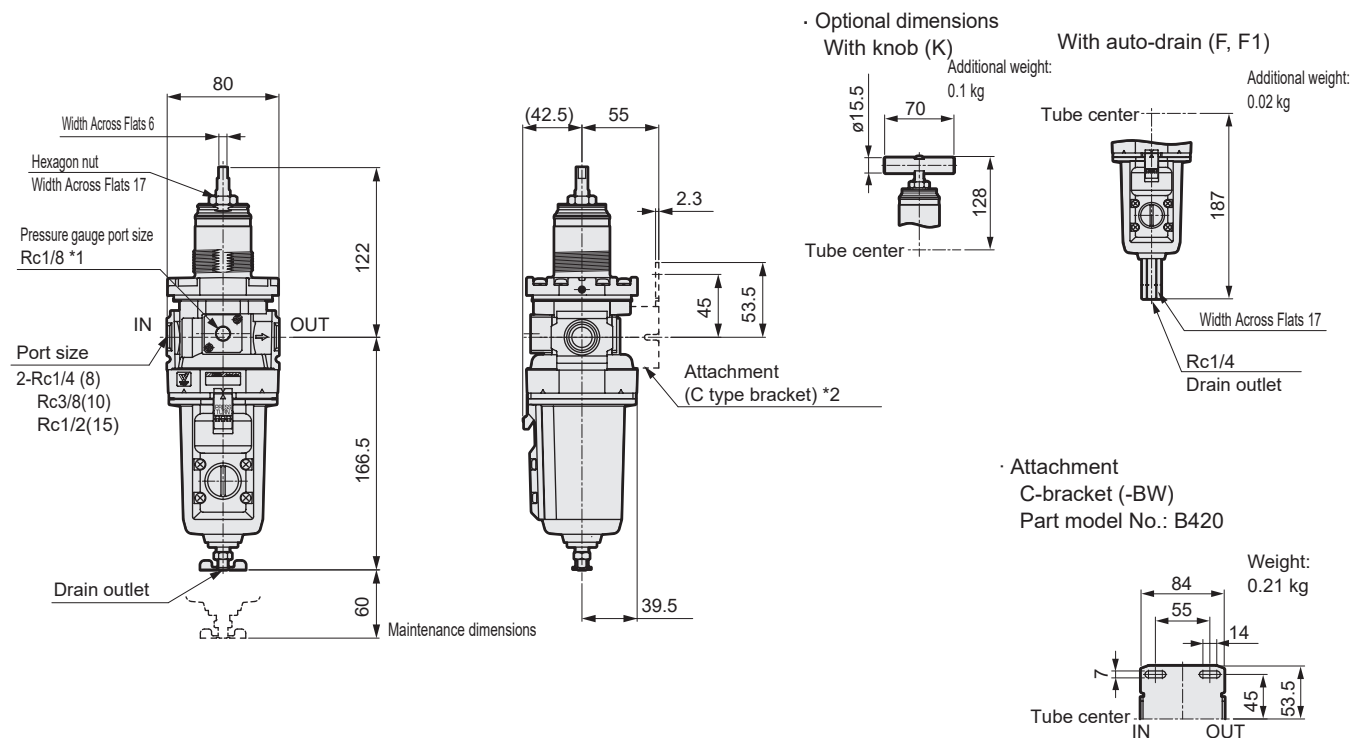


- \*1: The pressure gauge connection port is left open when shipped. Use the included pipe plug when sealing.
- \*2: Bracket is optionally included.
- \*3: Dimensions at the setting pressure of 0 MPa

Drain separator F.R.L. unit  
 Pneumatic auxiliary components  
 Pneumatic valves  
 Fluid control valves  
 Pneumatic cylinders  
 Related products  
 Safety precautions



### Dimensions

● WW8000-W

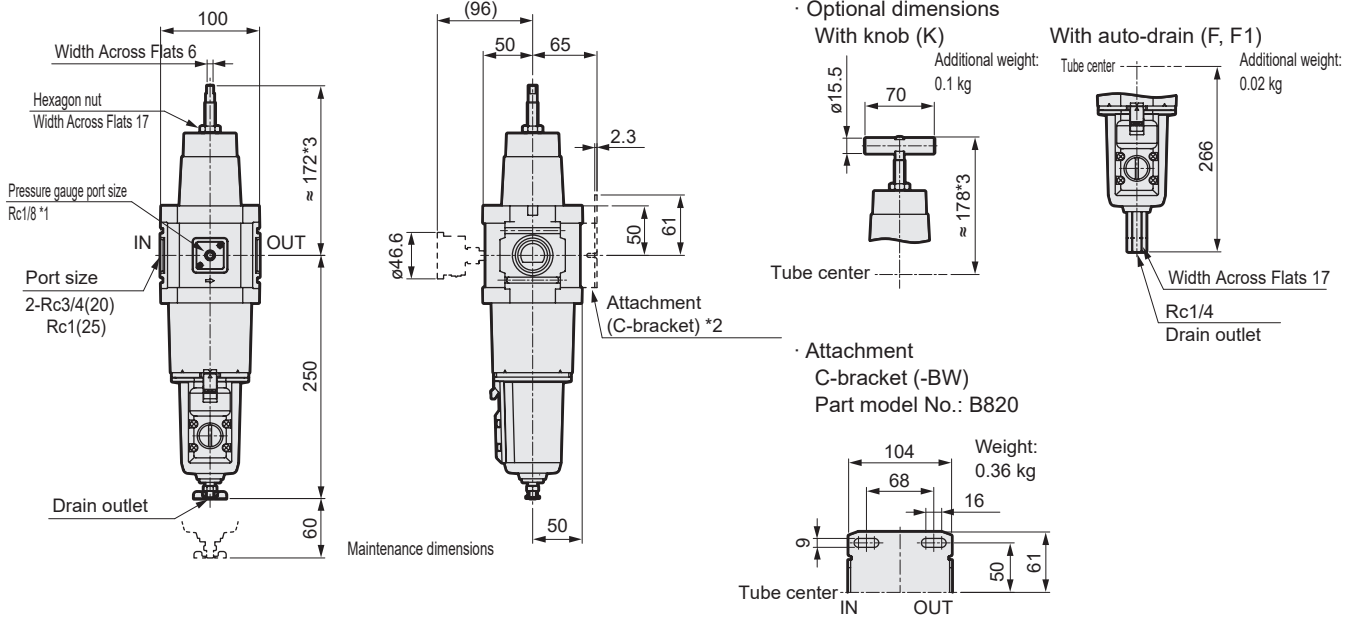

\*1: The pressure gauge connection port is left open when shipped. Use the included pipe plug when sealing.

\*2: Bracket is optionally included.

\*3: Dimensions at the setting pressure of 0 MPa

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Filter/Regulator for outdoor use

# BW7019 Series

Air filter/regulator integrated.

● Port size: Rc1/4

JISCode



Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions


## Specifications

Item	BW7019	
Max. working pressure	MPa	1.0
Proof pressure	MPa	1.5
Fluid temperature	°C	-20 to 60 (no freezing)
Ambient temperature	°C	-20 to 60
Filtration rating	µm	5
Set pressure	MPa	0.04 to 0.83
Pressure relief	With relief mechanism	
Port size	Rc	1/4
Weight	kg	0.45

\*1: When a piston drain "D" is used, min. working pressure is 0.1MPa.  
Do not use this device on equipment that experiences impacts.

\*2: Be careful of drain freezing when using the piston drain "D".

## How to order

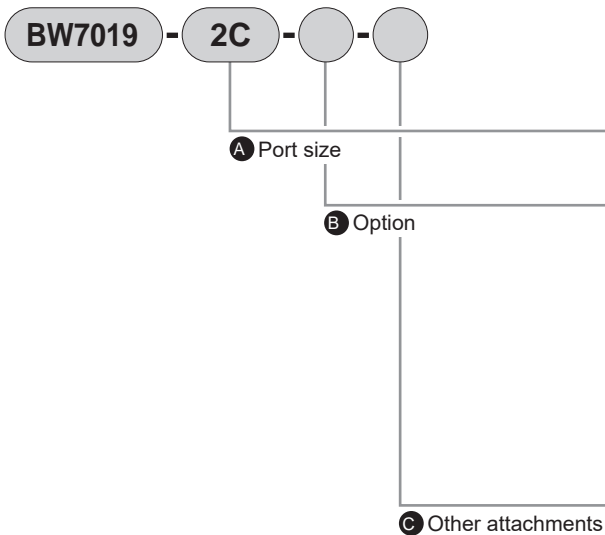


## ⚠ Precautions for model No. selection


\*1: The warranty period of option G is 3 years from the date of delivery or 1 year from initial use, whichever comes first.

\*2: For option G, the specifications and drawings must be agreed upon.

## Flow characteristics

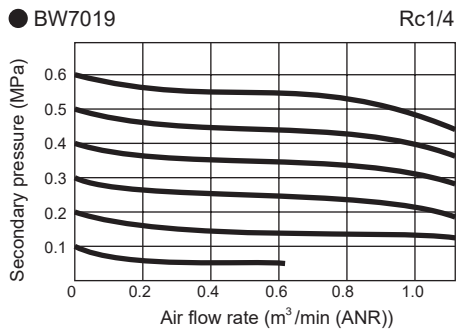

## Pressure characteristics

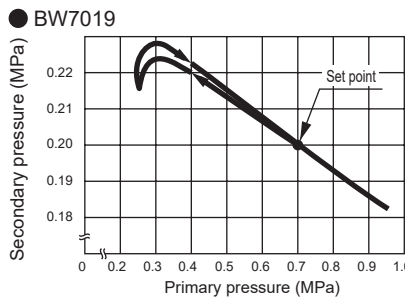

Code	Description	
<b>A Port size</b>		
2C	Rc1/4	
<b>B Option</b>		
Drain discharge	Blank	Tire valve
	D	Piston drain
Element	Blank	5 µm
guarantee period	Blank	1 year after delivery
	G	3 years after delivery <sup>*1, *2</sup> (with inspection certificate, inspection guidelines, traceability system diagram)
Flow Direction	Blank	Standard flow (left → right)
	X1	Reverse flow (right → left)
<b>C Other attachments</b>		
	Blank	Not included
	GW49P	Pressure gauge (GW49D-6-P10)
	BW	Bracket (6506-W)

## Option weight


\* Add to the weight of the standard accessories.

Unit: kg

	Drain discharge	Pressure gauge	Bracket
Code	D	G	B
BW7019	0	0.086	0.03

### Internal structure and parts list

● BW7019

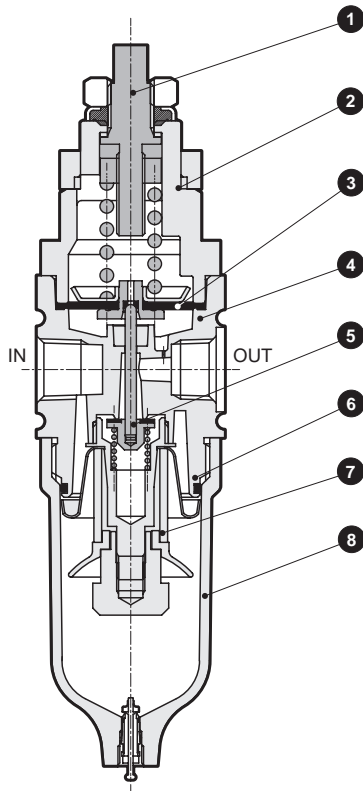


No.	Part name	Material
1	Adjusting screw	Stainless steel
2	Cover	Zinc alloy die-casting, aluminum
3	Diaphragm assembly	Nitrile rubber, copper, zinc alloy die-casting
4	Body	Aluminum alloy die-casting
5	Valve assembly	Copper alloy/hydrogenated nitrile rubber
6	O-ring	Special nitrile rubber
7	Element	Polypropylene
8	Metal bowl assembly	Zinc alloy die-casting


### Dimensions




● BW7019

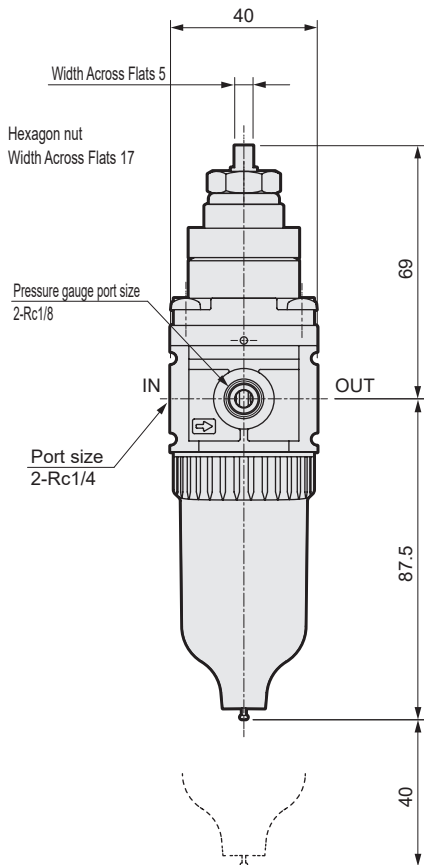

Maintenance dimensions

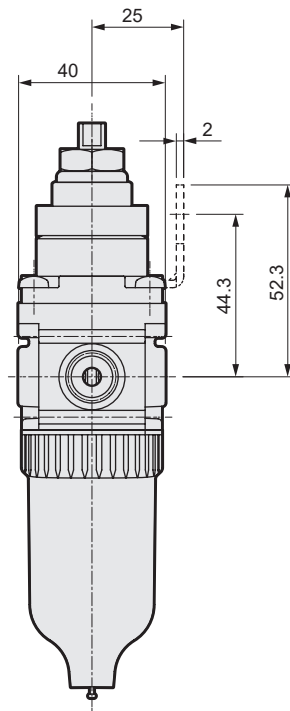

● Attachment  
Bracket(-BW)  
Part model No.: 6506-W

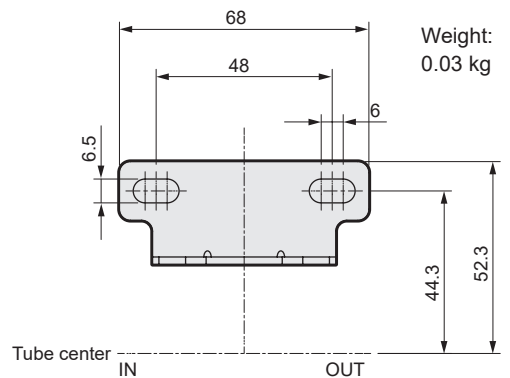

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Included component


Bracket  
**BW Series**  
Joiner  
**JW Series**



Drain separator  
F.R.L. unit

Dimensions

T-bracket set




Material: Aluminum die-casting  
Stainless steel mounting screws used

Model No.	Compatibility	A	B	C	D	E	F	G	H	I	J	K	Weight (kg)
BW310-W	3000 Series FX1004 Series	60	45	10	125	7	14	22	27	7	JIS B2401-P21	45	0.086
BW410-W	4000 Series FX1011 Series	60	45	10	125	7	14	22	37	7	JIS B2401-P21	55	0.094
BW810-W	8000 Series FX1037 Series	70	50	15	150	9	14	27	37	8	AS568-127	65	0.169

Pneumatic auxiliary  
components

Joiner set




Material: Aluminum die-casting  
Stainless steel mounting screws used

Model No.	Compatibility	A	B	C	D	E	Weight(kg)
C4000-JW400-W	3000 Series 4000 Series FX1004 Series FX1011 Series	21	44	32	M5	JIS B2401-P21	0.036
C8000-JW800-W	8000 Series FX1037 Series	26	65	50	M6	AS568-127	0.094

Pneumatic  
valves

Fluid control  
valves



Included component  
Pipe adaptor

**AW400/AW800 Series**


Port size: Rc1/4 to Rc11/4



Pneumatic  
cylinders

Dimensions

Pipe adaptor set




Material: Aluminum die-casting  
Stainless steel mounting screws used

Model No.	Port size	Compatibility	A	B	C	D	E (O-ring)	F (gasket)	Other
AW400-8-W	Rc <sup>1</sup> / <sub>4</sub>	3000 Series 4000 Series FX1004 Series FX1011 Series	20 (25) [34]	6 (11) [20]	50	45	JISB2401 P21 1 pc.	1 pc.	Values in ( ) are for Rc <sup>3</sup> / <sub>4</sub> Values in [ ] are for Rc1
AW400-10-W	Rc <sup>3</sup> / <sub>8</sub>								
AW400-15-W	Rc <sup>1</sup> / <sub>2</sub>								
AW400-20-W	Rc <sup>3</sup> / <sub>4</sub>								
AW400-25-W	Rc1	8000 Series FX1037 Series	35 (38)	15 (18)	81	66	AS568-127 1 pc.	1 pc.	Values in ( ) are for Rc1 <sup>1</sup> / <sub>4</sub>
AW800-20-W	Rc <sup>3</sup> / <sub>4</sub>								
AW800-25-W	Rc1								
AW800-32-W	Rc1 <sup>1</sup> / <sub>4</sub>								

Related  
products

Safety  
precautions

Pipe adaptor set



Material: Aluminum die-casting  
Stainless steel mounting screws used

Model No.	Port size	Compatibility	A	B	C	D	E (O-ring)	F (gasket)	Other
AW400-8-W-B31W	Rc <sup>1</sup> / <sub>4</sub>	3000 Series FX1004 Series	20	6	50	45	JISB2401 P21 1 pc.	1 pc.	-
AW400-10-W-B31W	Rc <sup>3</sup> / <sub>8</sub>								
AW400-15-W-B31W	Rc <sup>1</sup> / <sub>2</sub>								
AW400-8-W-B41W	Rc <sup>1</sup> / <sub>4</sub>	3000 Series 4000 Series FX1004 Series FX1011 Series	20 (25) [34]	6 (11) [20]	50	45	JISB2401 P21 1 pc.	1 pc.	Values in ( ) are for Rc <sup>3</sup> / <sub>4</sub> Values in [ ] are for Rc1
AW400-10-W-B41W	Rc <sup>3</sup> / <sub>8</sub>								
AW400-15-W-B41W	Rc <sup>1</sup> / <sub>2</sub>								
AW400-20-W-B41W	Rc <sup>3</sup> / <sub>4</sub>								
AW400-25-W-B41W	Rc1								
AW800-20-W-B81W	Rc <sup>3</sup> / <sub>4</sub>	8000 Series FX1037 Series	35 (38)	15 (18)	81	66	AS568-127 1 pc.	1 pc.	Values in ( ) are for Rc1 <sup>1</sup> / <sub>4</sub>
AW800-25-W-B81W	Rc1								
AW800-32-W-B81W	Rc1 <sup>1</sup> / <sub>4</sub>								



# Pressure Gauge Outdoor Series GW49D Series

● Port size: R1/8, R1/4

JISCode




## Specifications

Item	GW49D	
Working fluid	Compressed air	
Fluid temperature °C	-20 to 60 (no freezing)	
Ambient temperature °C	-20 to 60	
Accuracy *1	Full scale ±3% (with 5 to 35 °C)	
Shape	D type (rear side screw, stock section hexagon)	
Display system	ø46.6	
Material	Bourdon tube	Copper alloy
	Stock	Copper alloy (nickel plating)
	Housing	Stainless steel
	Lens	Tempered glass
Pressure range MPa	0 to 1.0	
Port size R	1/8, 1/4	
Weight g	100	

\*1: The guaranteed indicator accuracy temperature is 20±15°C.

## Dimensions

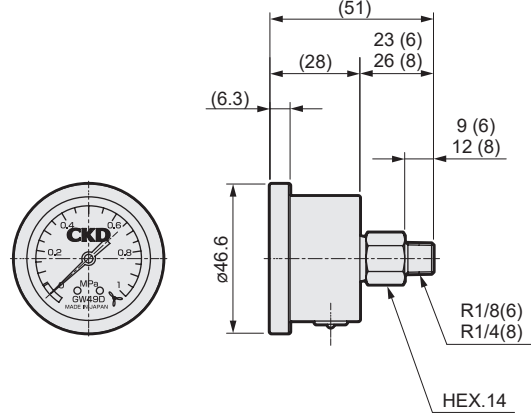

## How to order

**GW49D - 6 - P10**

**A** Model No.

**B** Port size

**C** Pressure display

Code	Description
<b>A Model No.</b>	<b>GW49D</b>
<b>B Port size</b>	<b>6 R<sup>1</sup>/<sub>8</sub></b>
	<b>8 R<sup>1</sup>/<sub>4</sub></b>
<b>C Pressure display [MPa] *1</b>	<b>P10 0 to 1.0 MPa</b>

\*1: Consult with CKD concerning psi or bar display.

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions






Silencer Metal body Outdoor Series

# SL-W Series

● Port size: R1/4 to R1/2

JISCode



## Specifications

Item	SL-8A-W	SL-10A-W	SL-15A-W
Working fluid	Compressed air		
Max. working pressure MPa	0.9		
Min. working pressure MPa	0		
Proof pressure MPa	1.35		
Fluid temperature °C	5 to 60		
Ambient temperature °C	-10 to 60 (no freezing)		
Port size	R 1/4	R 3/8	R 1/2
Weight g	75	100	105
Noise reduction effect dB [A]	20 and over		
Flow rate *1 m <sup>3</sup> /min(ANR)	2.4	3.2	4.1
Effective cross-sectional area mm <sup>2</sup>	36	48	61

\*1: Flow rate is the atmospheric pressure conversion value at pressure 0.5 MPa.

## How to order

SL - **8A** - W



● Replacement element

SL - **8A** - EL

A Port size	
8 A	R 1/4
10 A	R 3/8
15 A	R 1/2

## Dimensions/Internal structure and main parts list

● SL-8A to 15A-W

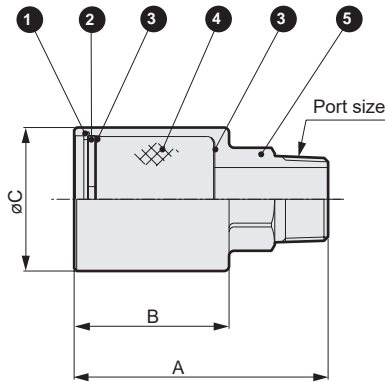

Model No.	Port size	A	B	øC	D
SL-8A-W	R 1/4	64	41	30	17
SL-10A-W	R 3/8	74.5	49.5	36	24
SL-15A-W	R 1/2	77.5	49.5	36	24

Part No.	Part name	Material
1	C-snap ring	Stainless steel
2	Perforated metal	Stainless steel
3	Wire mesh	Stainless steel
4	Element	Vinylidene chloride
5	Body	Aluminum

## ⚠ Safety precautions

- Use appropriate torque to tighten the pipes when connecting them.
- Noise reduction effect values are based on JIS standards. Silencing could vary with the type of circuit and pressure used.

[Recommended tightening torque]

Port thread	Tightening torque N·m
R 1/4	6 to 8
R 3/8	13 to 15
R 1/2	16 to 18



Speed controller Medium bore size Outdoor Series

# SC1-W Series

● Port size: Rc1/4 to Rc1/2

JISCode



## Specifications

Item Item	SC1-8-W	SC1-10-W	SC1-15-W	
Working fluid	Compressed air			
Max. working pressure MPa	1.0			
Min. working pressure MPa	0.05			
Proof pressure MPa	1.5			
Fluid temperature °C	5 to 60			
Ambient temperature °C	-10 to 60 (no freezing)			
Port size Rc	1/4	3/8	1/2	
Weight g	95	205	195	
Dial value (needle position)	10	10	10	
Free flow	Flow rate/l/min (ANR)	930	2600	2900
	Effective cross-sectional area mm <sup>2</sup>	14	39	43
Controlled flow	Flow rate/l/min (ANR)	870	1500	2400
	Effective cross-sectional area mm <sup>2</sup>	13	22	36

\*1: Flow rate is the atmospheric pressure conversion at 0.5MPa.


## How to order

SC1 - 8 - W

A Port size


Code	Content Volume
<b>A Port size</b>	
8	Rc1/4
10	Rc3/8
15	Rc1/2

## Flow characteristics

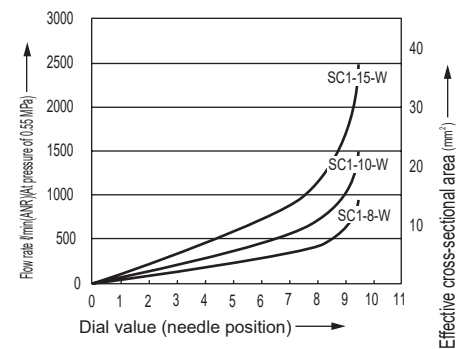

## Dimensions

● SC1-W

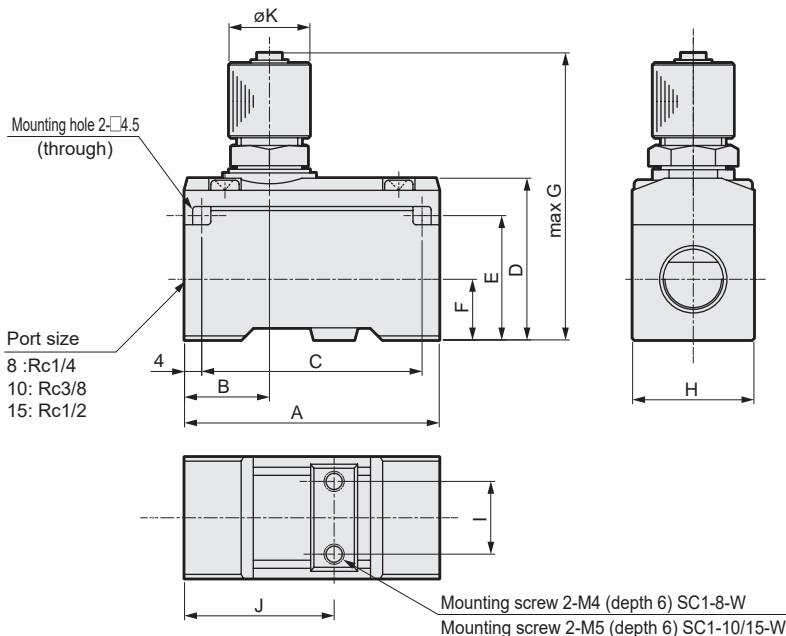


Model No.	A	B	C	D	E	F
SC1-8-W	50	20	42	31	23	11
SC1-10/15-W	63	21	55	40	31	15

Model No.	G	H	I	J	K
SC1-8-W	67	22	12	31	19
SC1-10/15-W	83	30	18	37	23

## ⚠ Safety precautions

- When operating in the low pressure range (0.05 MPa or less), or when the piping, etc., before and after the product are excessively constricted, note that vibrating sounds can be easily generated if the cylinder speed is rapid, or if the differential pressure is small.
- When tightening, do not tighten the needle or lock nut section excessively. (Tightening torque approx. 3 Nm)



Single valve/body piping  
Pilot operated 5-port pneumatic valve

# 4F2/3-W Series


● Cylinder bore size:  $\varnothing 40$  to  $\varnothing 100$



Drain separator  
F.R.L. unit


## JIS symbol

- 5-port valve
- 2 position single




Pneumatic auxiliary  
components

- 2-position double




Pneumatic  
valves

- 3-position  
All ports closed




Fluid control  
valves

- 3-position A/B/R connection



Pneumatic  
cylinders

- 3-position P/A/B connection



Related  
products

Safety  
precautions

## Common specifications

Item	Description
Valve and operation	Pilot operated soft spool valve
Working fluid	Compressed air
Max. working pressure	MPa 1.0
Min. working pressure	2-position MPa 0.1 (WC:0.2)
	3-position MPa 0.15 (WC:0.25)
Proof pressure	1.5
Ambient temperature (*1)	$^{\circ}\text{C}$ -10 to 60 (WC: -20 to 60 $^{\circ}\text{C}$ )
Fluid temperature	$^{\circ}\text{C}$ 5 to 60 (WC: -20 to 60 and no freezing)
Lubrication	Not required (*2)
Degree of protection	IP65
Vibration resistance	$\text{m/s}^2$ 50 or less
Shock resistance	$\text{m/s}^2$ 300 or less
Atmosphere	Cannot be used in corrosive gas environments

\*1: The ambient temperature indicates the temperature for storage and upon installation, which will differ from the fluid temperature during operation.

\*2: Use turbine oil Class 32 ISO VG32 for lubrication. Consult with CKD regarding use in low-temperature environments.

## Electrical specifications

Item	Description
Rated voltage	AC 100, 200(50/60Hz)
	DC 12, 24
Voltage fluctuation range	$\pm 10\%$
Starting current	AC 100V 0.170/0.140
	AC 200V 0.090/0.070
	A DC 12V 0.500
	A DC 24V 0.250
Holding current	AC 100V 0.100/0.080
	AC 200V 0.050/0.040
	A DC 12V 0.500
	A DC 24V 0.250
Power consumption	AC 100V 5.0/4.0
	AC 200V 5.0/4.0
	W DC 12V 6.0
	W DC 24V 6.0
Thermal class	B (molded coil)

## Individual specifications

Item		4F2	4F3
Weight kg	2-position	Single 0.82	0.92
		Double 1.37	1.48
	3-position 1.50	1.67	

## Flow characteristics

Model No.	Solenoid position		Port size	Sonic conductance C [dm <sup>3</sup> /(s·bar)]	Critical pressure ratio b	
4F2	2-position	Single	Rp1/4	3.0	0.33	
		Double				
	3-position	All ports closed		2.5	0.43	
		A/B/R connection				
4F3	2-position	Single	Rp1/4	3.9	0.42	
		Double				
	3-position	All ports closed		4.0	0.35	
		A/B/R connection				
		P/A/B connection				
	2-position	Single		Rp3/8	5.8	0.42
		Double				
		3-position			All ports closed	4.4
A/B/R connection						
3-position	A/B/R connection	5.1	0.46			
	P/A/B connection			4.4	0.42	

\*4: Effective cross-sectional area S and sonic conductance C are converted as  $S \approx 5.0 \times C$ .

### How to order

4F2 1 0 - 08 - M2 B W - 100 VAC

**A** Model No.

**B** Solenoid position

**C** Port size

**D** Manual override

**E** Electrical connections

**F** Outdoors

**G** Other options

**H** Voltage

Code	Description	4F2	4F3
<b>A Model No.</b>			
4F2	4F2 Series	●	
4F3	4F3 Series		●
<b>B Solenoid position</b>			
1	2 position single	●	●
2	2-position double	●	●
3	3-position all ports closed	●	●
4	3-position ABR connection	●	●
5	3-position PAB connection		●
<b>C Port size *1</b>			
08	Rp1/4	●	●
10	Rp3/8		●
<b>D Manual override *2</b>			
Blank	Locking (resin)	●	●
M2	Non-locking (metal)	●	●
M3	Locking with manual lever (resin)	●	●
R	Position change of manual override	●	●
<b>E Electrical connections</b>			
B1	Round terminal box (G3/4)	●	●
B	Round terminal box (G1/2)	●	●
BL	Round terminal box (G1/2)/with lamp *3	●	●
G	Round terminal box (G1/2) With gland (A-15a)	●	●
GL	Round terminal box (G1/2) with lamp *3 Gland (A-15a) included	●	●
<b>F Outdoors</b>			
W	Outdoor (general)	●	●
WC	Outdoor specification (low temperature environment) <sup>a</sup>	●	●
<b>G Other options</b>			
Blank	No option	●	●
S	Surge suppressor included	●	●
H	Check valve included (only applicable to 3-position all ports closed)	●	●
N	Plug included (3-port valve)	●	●
NC	3-port valve specifications plug assembly (C1 (A), E1 (R1) assembly)	●	●
NO	3-port valve specifications plug assembly (C2 (B), E2 (R2) assembly)	●	●
G	3-year warranty after delivery (with inspection certificate, inspection guidelines, traceability system diagram)	●	●
<b>H Voltage</b>			
100 VAC	100 VAC 50/60Hz	●	●
200 VAC	200 VAC 50/60Hz	●	●
110 VAC	110 VAC 50/60Hz	●	●
220 VAC	220 VAC 50/60Hz	●	●
12 VDC	12 VDC *3	●	●
24 VDC	24 VDC	●	●
<b>* Other made-to-order products</b>			
	48 VDC	●	●
	100 VDC	●	●
	110 VDC	●	●

### ⚠ Precautions for model No. selection

\*1: As Rc and NPT threads can also be used for piping port screws, contact CKD for details.

\*2: When using the unit in a complete outdoor exposure environment (where direct sunlight strikes permanently), select the non-locking manual override M2 (metal). Further, as a metal locking manual override is available made to order, contact CKD for details.

\*3: 12VDC is not available for BL with lamp and GL.

\*4: Support with a manifold is not available.

[Model No. example]

**4F210-08-M2BW-AC100V**

- A** Model : 4F2
- B** Solenoid position : 2-position single
- C** Port size : Rp1/4
- D** Manual override : Non-locking
- E** Electrical connections : Round terminal box(G1/2)
- F** Outdoors : Outdoors(General environment)
- G** Other options : No option
- H** Voltage : 100 VAC

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products


Safety  
precautions

# 4F2/4F3-W Series

## Dimensions


### 4F210/4F310

- 2-position single: round terminal box without lamp

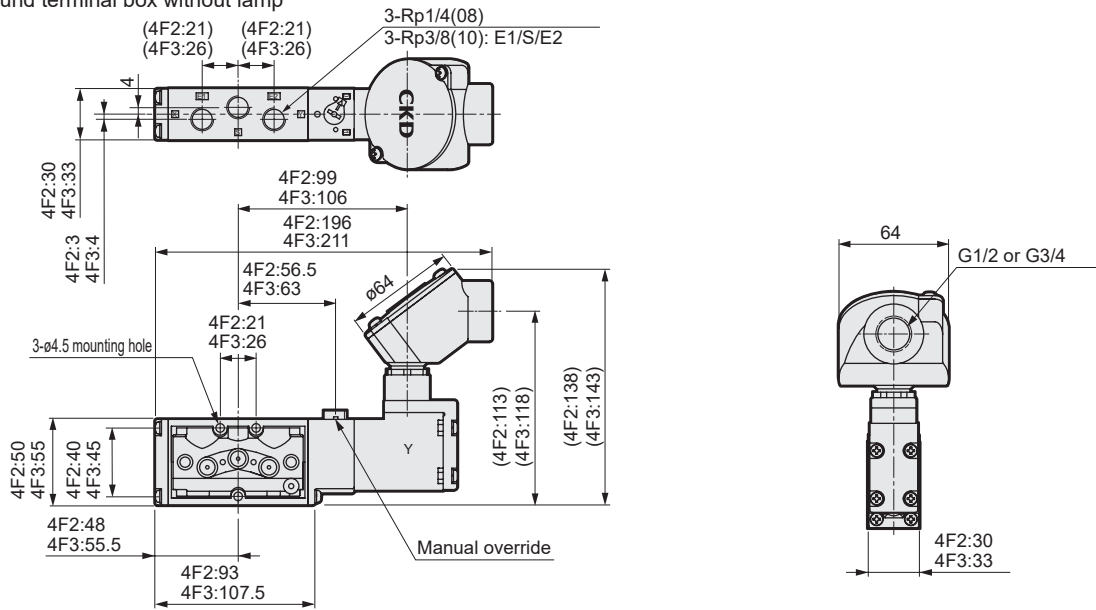


### 4F220/4F320

- 2-position double solenoid: round terminal box without lamp

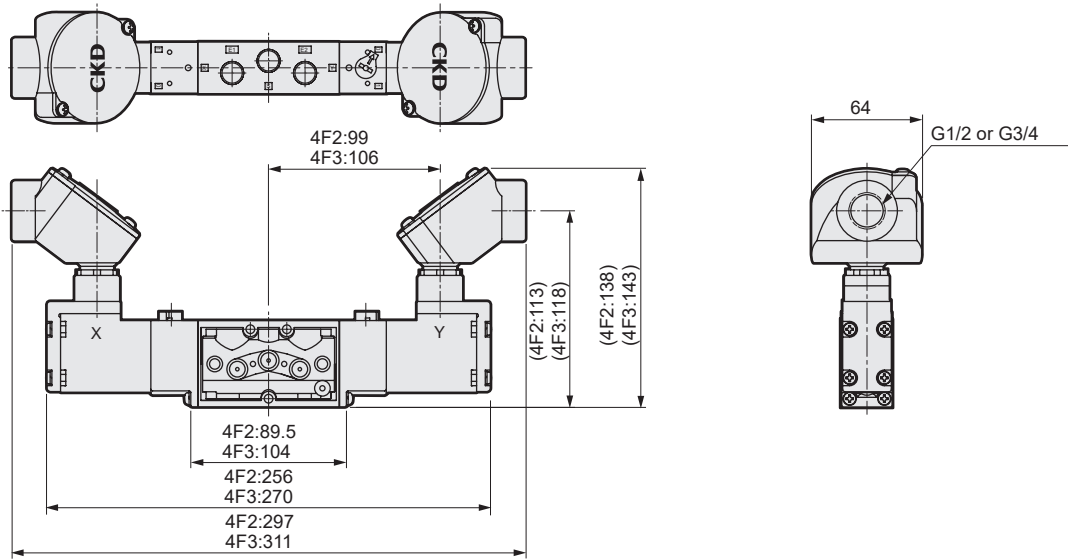

### 4F2<sup>3</sup><sub>40</sub>/4F3<sup>3</sup><sub>40</sub>

- 3-position: round terminal box without lamp

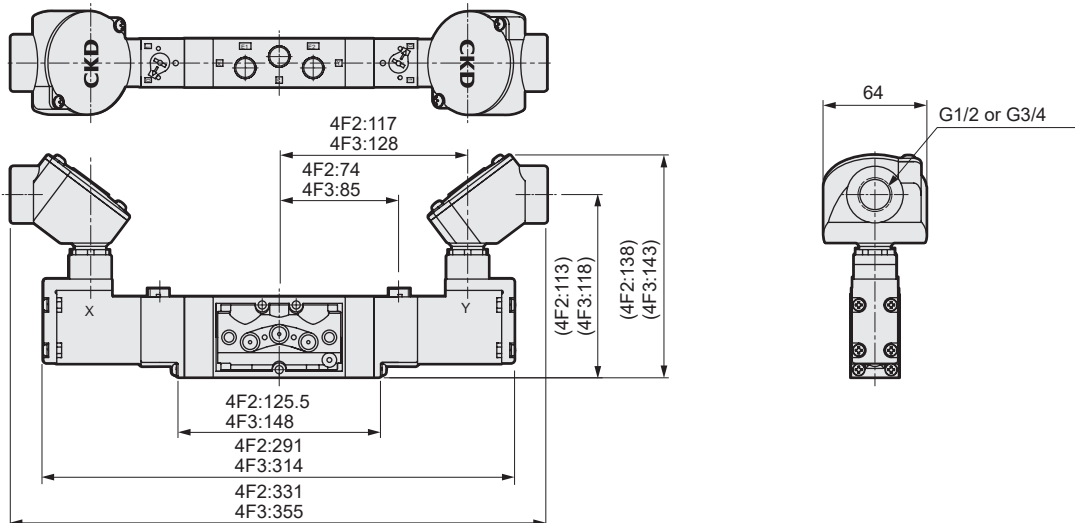




## Dimensions


### 4F210/4F310

- 2-position single: round terminal box with lamp

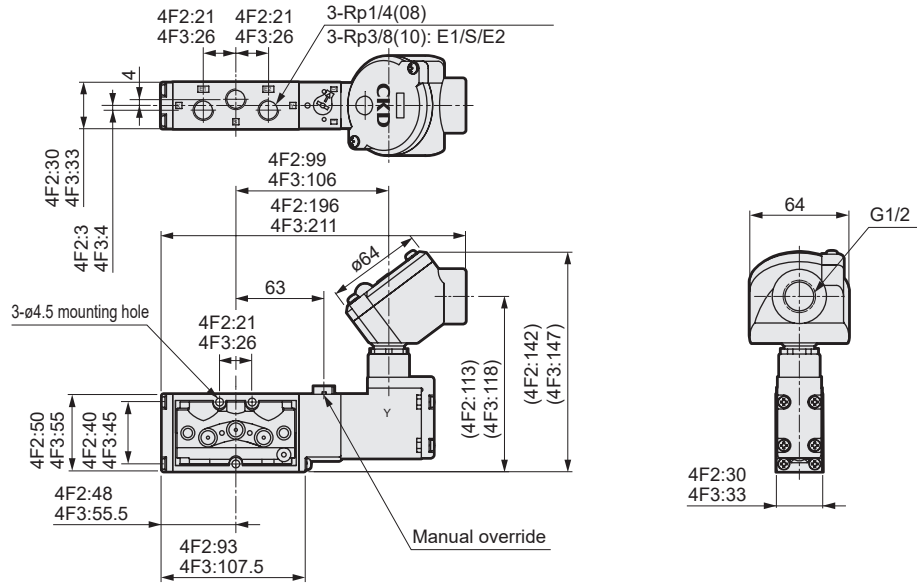


### 4F220/4F320

- 2-position double solenoid: round terminal box with lamp

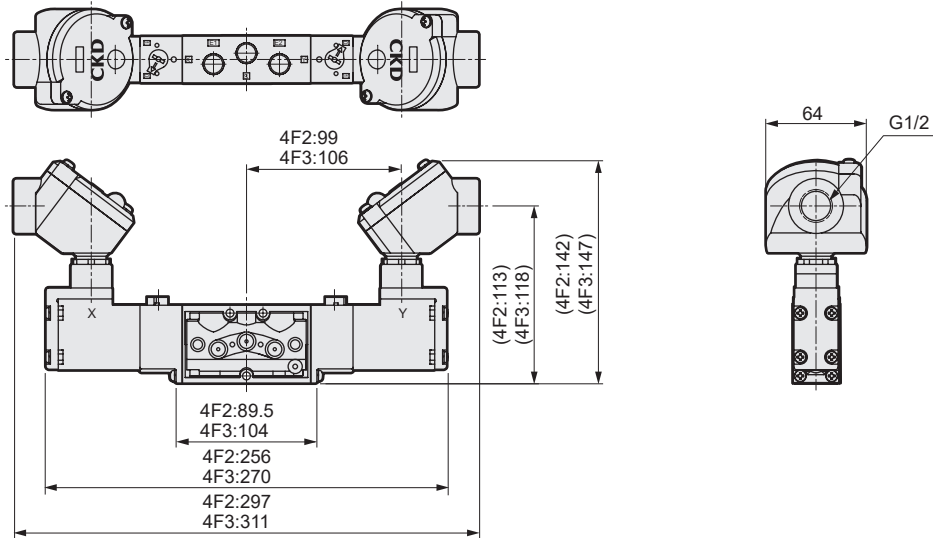

### 4F2<sup>3</sup>/<sub>4</sub>0/4F3<sup>3</sup>/<sub>5</sub>0

- 3-position: round terminal box with lamp

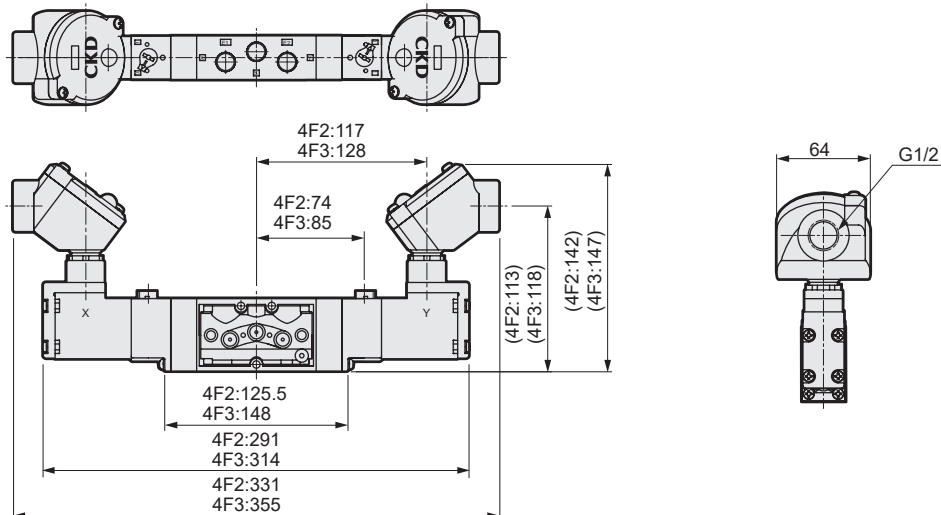

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Single valve/body piping  
Pilot operated 5-port pneumatic valve

# 4F1/3-NM Series

NAMUR standards option



Drain separator  
F.R.L. unit

## Common specifications

Item	Description
Valve and operation	Pilot operated soft spool valve
Working fluid	Compressed air
Max. working pressure MPa	1.0
Min. working pressure MPa	0.1(WC:0.2)
Guaranteed proof pressure MPa	1.5
Ambient temperature (*1) °C	-10 to 60 (for WC -20 to 60°C)
Fluid temperature °C	5 to 60 (WC:-20 to 60; no freezing)
Lubrication	Not required (*2)
Degree of protection	IP65
Vibration/shock resistance m/s <sup>2</sup>	50 or less/300 or less
Working atmosphere	Cannot be used in corrosive gas environments

Pneumatic auxiliary  
components

Pneumatic  
valves

\*1: The ambient temperature indicates the temperature for storage and upon installation, which will differ from the fluid temperature during operation.  
\*2: Use turbine oil Class 32 ISO VG32 for lubrication. Consult with CKD regarding use in low-temperature environments.

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions

## Electrical specifications


Item	Description		
Rated voltage V	AC	100, 200(50/60Hz)	
	DC	12, 24	
Rated voltage fluctuation range	±10%		
Starting current A	AC	100V	0.170/0.140
		200V	0.090/0.070
	DC	12V	0.500
		24V	0.250
Holding current A	AC	100V	0.100/0.080
		200V	0.050/0.040
	DC	12V	0.500
		24V	0.250
Power consumption W	AC	100V	5.0/4.0
		200V	5.0/4.0
	DC	12V	6.0
		24V	6.0
Thermal class	B (molded coil)		

## Flow characteristics

Model No.	Solenoid position	Port size	Sonic conductance C[dm <sup>3</sup> /(s·bar)]
4F1	2-position	Single	1.6
		Double	
4F3	2-position	Single	3.1
		Double	

\*1: Effective cross-sectional area S and sonic conductance C are converted as  $S \approx 5.0 \times C$ .

### How to order

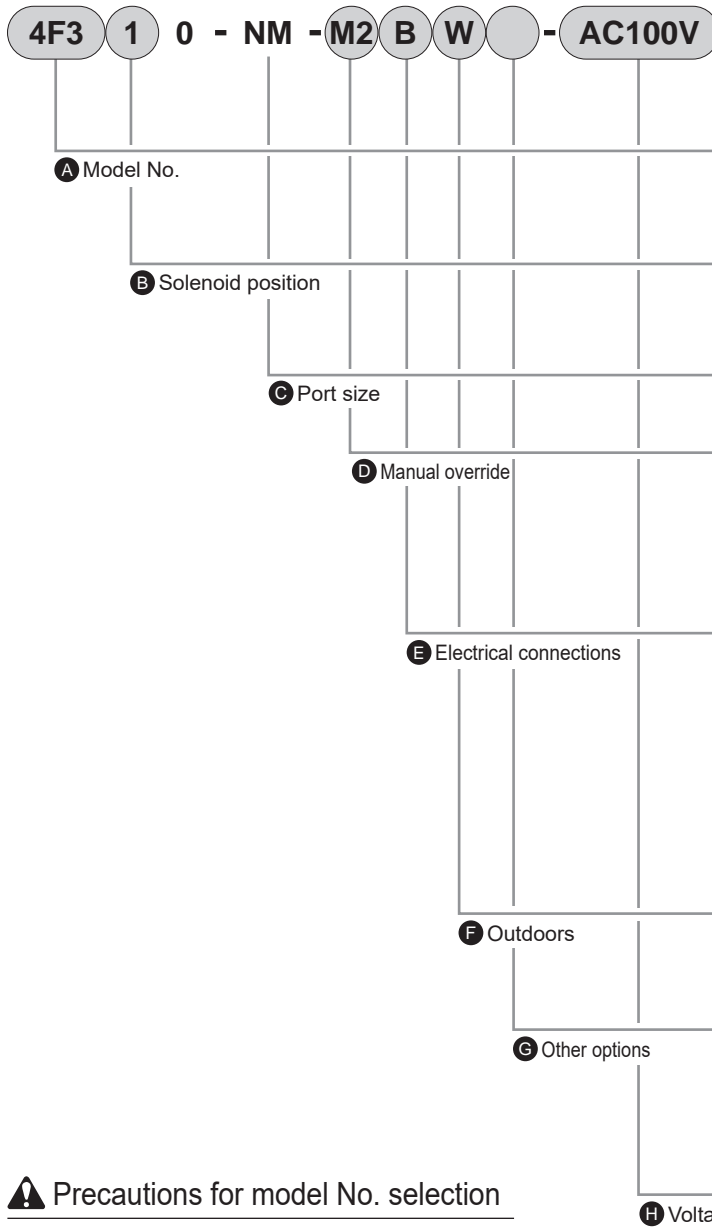

Code		Description	4F1	4F3
<b>A Model No.</b>				
4F1		4F1 Series	●	
4F3		4F3 Series		●
<b>B Solenoid position</b>				
1		2 position single	●	●
2		2-position double	●	●
<b>C Port size</b>				
NM		NAMUR standards (port size Rc1/4) *3	●	●
<b>D Manual override</b> *4				
Blank		Locking (resin)	●	●
M2		Non-locking (metal)	●	●
M3		Locking with manual lever (resin)	●	●
R		Position change of manual override	●	●
<b>E Electrical connections</b>				
B1		Round terminal box (G3/4)	●	●
B		Round terminal box (G1/2)	●	●
BL		Round terminal box (G1/2) with lamp *5	●	●
G		Round terminal box (G1/2) With gland (A-15a)	●	●
GL		Round terminal box (G1/2) with lamp *5 Gland (A-15a) included	●	●
<b>F Outdoors</b>				
W		Outdoor (general)	●	●
WC		Outdoor specification (low temperature environment)		●
<b>G Other options</b>				
Blank		No option	●	●
S		Surge suppressor included	●	●
G		3-year warranty after delivery (with inspection certificate, inspection guidelines, traceability system diagram)	●	●
<b>H Voltage</b>				
AC100V		100 VAC 50/60Hz	●	●
AC200V		200 VAC 50/60Hz	●	●
AC110V		110 VAC 50/60Hz	●	●
AC220V		220 VAC 50/60Hz	●	●
DC12V		12 VDC *5	●	●
DC24V		24 VDC	●	●
<b>* Other made-to-order products</b>				
		48 VDC	●	●
		100 VDC	●	●
		110 VDC	●	●

### ⚠ Precautions for model No. selection

- \*1: With 4F1, the Consumable parts, etc. of the body are 4F1 standard products. 4F3 products are used in coil assembly.
- \*2: Note that with 4F3, the Consumable parts of the body are dedicated parts.
- \*3: The only piping port is Rc1/4. The C1/C2 ports on the NAMUR surface have not been threaded.
- \*4: When using the unit in a complete outdoor exposure environment (where direct sunlight strikes permanently), select the non-locking manual override M2 (metal). Further, as a metal locking manual override is available made to order, contact CKD for details.
- \*5: 12VDC is not available for BL with lamp and GL.
- \*6: Contact CKD as the WC outdoor specifications (low temperature environment) of the 4F1-NM series can be made to order supported.

[Model No. example]

### 4F310-NM-M2BW-AC100V

- Ⓐ Model : 4F3
- Ⓑ Solenoid position : 2-position single
- Ⓒ Port size : Rc1/4
- Ⓓ Manual override : Non-locking
- Ⓔ Electrical connections : Round terminal box(G1/2)
- Ⓕ Outdoors : Outdoors(General environment)
- Ⓖ Other options : None
- Ⓗ Voltage : 100 VAC

Drain separator  
F.R.L. unit  
Pneumatic auxiliary components  
Pneumatic valves  
Fluid control valves  
Pneumatic cylinders  
Related products  
Safety precautions


# 4F1/4F3-NM Series

## Dimensions


### ● 4F110-NM

- 2 position single

Round terminal box: (B1/B/BL/G/GL)



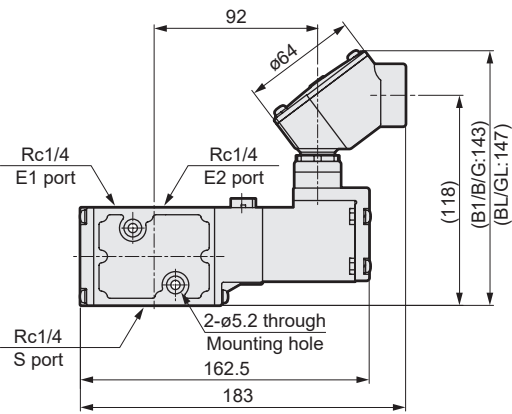


Position change of manual override: (R)

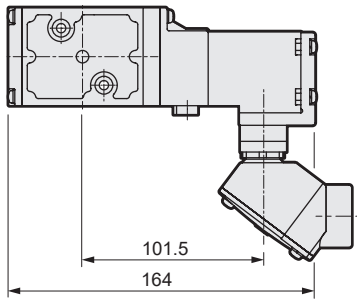

### ● 4F120-NM


- 2-position double

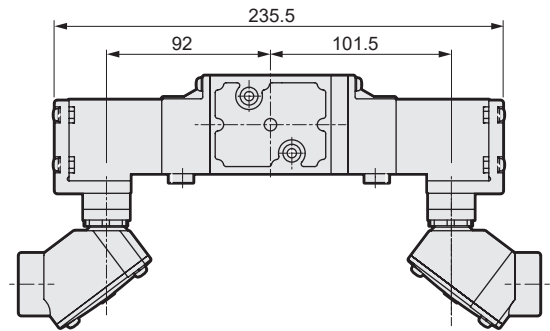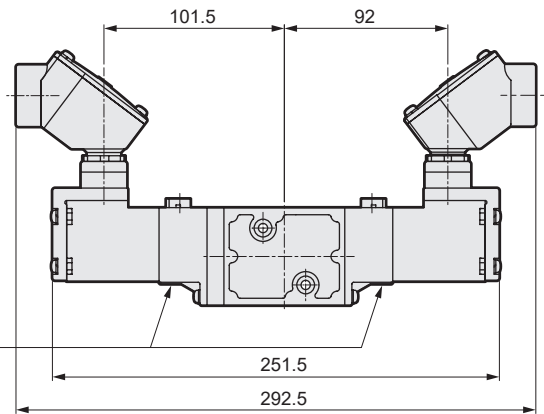


### ● 4F310-NM

- 2 position single

Round terminal box: (B1/B/BL/G/GL)



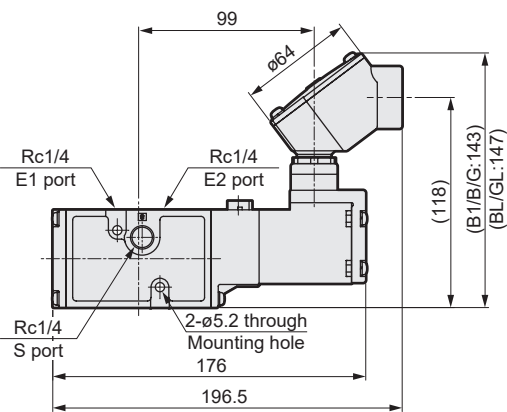


Position change of manual override: (R)

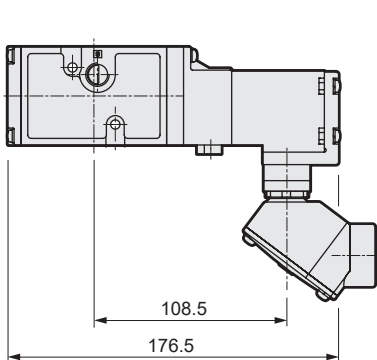

### ● 4F320-NM

- 2-position double

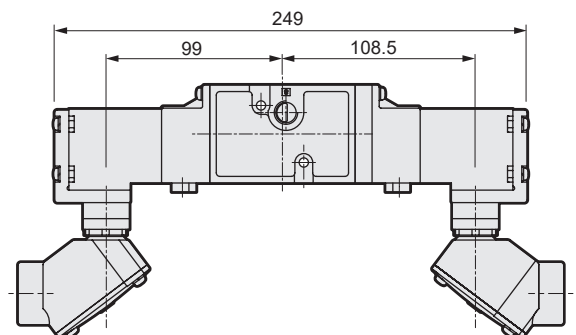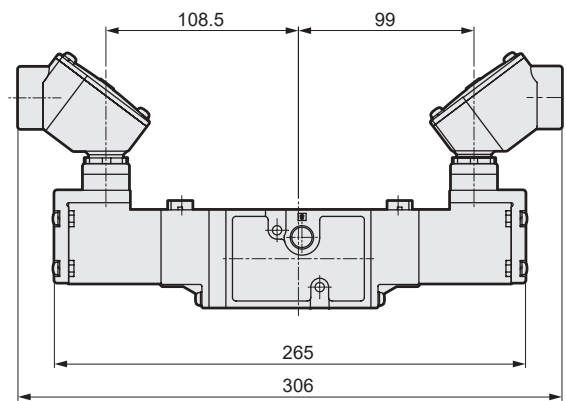

Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


**Pneumatic  
valves**

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Single valve/sub-plate piping  
Pilot operated 5-port pneumatic valve

# 4F4/5/6/7-W Series


● Cylinder bore size:  $\varnothing 63$  to  $\varnothing 250$



Drain separator  
F.R.L. unit


## JIS symbol

● 5-port valve  
2 position single




Pneumatic auxiliary  
components

2-position double




Pneumatic  
valves

3-position  
All ports closed




Fluid control  
valves

3-position A/B/R connection




Pneumatic  
cylinders

3-position P/A/B connection



Related  
products

● External pilot



(Code indicates 2-position single)

Safety  
precautions

## Common specifications

Item	Description
Valve and operation	Pilot operated soft spool valve
Working fluid	Compressed air
Max. working pressure MPa	1.0
Min. working pressure MPa (*2)	Refer to Individual specifications listed below
Proof pressure MPa	1.5
Ambient temperature °C (*1)	-10 to 60 (no freezing)
Fluid temperature °C	5 to 60
Lubrication	Not required (turbine oil ISO VG32 if necessary for lubrication)
Degree of protection	Dust-proof
Vibration resistance cm/s <sup>2</sup>	50 or less
Shock resistance m/s <sup>2</sup>	300 or less
Atmosphere	Cannot be used in corrosive gas environment.

\*1: The ambient temperature indicates the temperature for storage and upon installation, which will differ from the fluid temperature during operation.

\*2: The working pressure range is 0 to 1.0 MPa when the external pilot (option code: K) is selected. Set the external pilot pressure between 0.15 and 1.0 MPa.

## Electrical specifications

Item	4F4 to 7		
Rated voltage V	AC	100, 200, 110, 220(50/60Hz)	
	DC	12, 24	
Voltage fluctuation range		±10%	
Starting current A	AC	100V	0.170/0.140
		200V	0.090/0.070
		110V	0.15/0.13
		220V	0.08/0.06
	DC	12V	0.500
		24V	0.250
Holding current A	AC	100V	0.100/0.080
		200V	0.050/0.040
		110V	0.09/0.07
		220V	0.05/0.04
	DC	12V	0.500
		24V	0.250
Power consumption W	AC	100V	5.0/4.0
		200V	5.0/4.0
		110V	5.0/4.0
		220V	5.0/4.0
	DC	12V	6.0
		24V	6.0
Thermal class		B (molded coil)	

## Individual specifications

Item		4F4	4F5	4F6	4F7				
Min. working Pressure MPa	2-position	Single	0.10	0.10	0.15				
		Double							
	3-position	All ports closed	0.15	0.15					
		A/B/R connection P/A/B connection							
Port size		Rc1/4 NPT1/4 G1/4	Rc3/8 NPT3/8 G3/8	Rc3/8 NPT3/8 G3/8	Rc1/2 NPT1/2 G1/2	Rc1/2 NPT1/2 G1/2	Rc3/4 NPT3/4 G3/4	Rc3/4 NPT3/4 G3/4	Rc1 NPT1 G1

## Performance/characteristics by model

Item	4F4	4F5	4F6	4F7
Response time *1 ms	60	70	200	300

\*1: The response times are values with working pressure of 0.5 MPa, without lubrication, and with the power ON. They depend on the pressure and the lubricant quality.

## Weight

Item	4F4	4F5	4F6	4F7		
Weight kg	2-position	Single	1.01	1.26	1.92	3.46
		Double	1.29	1.58	2.26	3.78
	3-position	1.45	1.84	2.56	4.80	



## Flow characteristics

Model No.	Solenoid position	Port size	C[dm <sup>3</sup> /(s·bar)]	b	S(mm <sup>2</sup> )	
4F4	2-position	Single	Rc1/4, Rc3/8 NPT1/4, NPT3/8 G1/4, G3/8	5.0	0.21	-
		Double				
	3-position	All ports closed		4.7	0.24	
		A/B/R connection		5.3	0.29	
		P/A/B connection		5.3	0.29	
4F5	2-position	Single	Rc3/8, Rc1/2 NPT3/8, NPT1/2 G3/8, G1/2	10.0	0.32	-
		Double				
	3-position	All ports closed		9.7	0.28	
		A/B/R connection		9.8	0.25	
		P/A/B connection				
4F6	2-position	Single	Rc1/2, Rc3/4 NPT1/2, NPT3/4 G1/2, G3/4	18.0	0.31	-
		Double				
	3-position	All ports closed		15.0	0.23	
		A/B/R connection				
		P/A/B connection				
4F7	2-position	Single	Rc3/4, Rc1 NPT3/4, NPT1 G3/4, G1	-	-	160
		Double				
	3-position	All ports closed				
		A/B/R connection				
		P/A/B connection				

\*1: Effective cross-sectional area S and sonic conductance C are converted as  $S \approx 5.0 \times C$ .

# 4F4 to 7-W Series

## How to order single valve/sub-plate piping

4F4 1 0 -08-M2 B W - AC100V

● Discrete solenoid valve Discrete

4F4 1 9 -00-M2 B W - AC100V

(4F4.5.6.7)

A Model No. B Solenoid position

C Port size

D Manual override

E Electrical connections

F Other options

G Voltage

A Model No.

4F4 4F5 4F6 4F7

Code	Description	4F4	4F5	4F6	4F7
<b>B Solenoid position</b>					
1	2 position single	●	●	●	●
2	2-position double	●	●	●	●
3	3-position all ports closed	●	●	●	●
4	3-position A/B/R connection	●	●	●	●
5	3-position P/A/B connection	●	●	●	●

Code	Description	4F4	4F5	4F6	4F7
<b>C Port size</b>					
08	Rc1/4	●			
10	Rc3/8	●	●		
15	Rc1/2		●	●	
20	Rc3/4			●	●
25	Rc1				●
08 N	NPT1/4	●			
10 N	NPT3/8	●	●		
15 N	NPT1/2		●	●	
20 N	NPT3/4			●	●
25 N	NPT1				●
08G	G1/4	●			
10G	G3/8	●	●		
15G	G1/2		●	●	
20G	G3/4			●	●
25G	G1				●

Code	Description	4F4	4F5	4F6	4F7
<b>D Manual override</b>					
Blank	Locking	●	●	●	●
M2	Non-locking	●	●	●	●
M3	Locking with manual lever	●	●	●	●

Code	Description	4F4	4F5	4F6	4F7
<b>E Electrical connections</b>					
B1	Round terminal box(G3/4)	●	●	●	●
B	Round terminal box(G1/2)	●	●	●	●
BL	Round terminal box(G1/2)/with lamp (*2)(*3)	●	●	●	●
G	Round terminal box Gland(A-15a)with	●	●	●	●
GL	Round terminal box (*2)(*3) Gland(A-15a)With indicator lamp	●	●	●	●

Code	Description	4F4	4F5	4F6	4F7
<b>F Other options</b>					
Blank	No option	●	●	●	●
K	External pilot (*1)	●	●	●	●
S	Surge suppressor Included	●	●	●	●
H	(Check valve included)(3-position all ports closed only)	●	●	●	●
N	Plug included(for 3-port valve)	●	●	●	●
NC	3-way valve used plug assembly (C1(A).E1(R 1)Assembly)	●	●	●	●
NO	3-way valve used plug assembly (C2(B).E2(R 2)Assembly)	●	●	●	●
G	3-year warranty after delivery (with inspection certificate, inspection guidelines, traceability system diagram)	●	●	●	●

Code	Description	4F4	4F5	4F6	4F7
<b>G Voltage</b>					
AC100V	100 VAC 50/60Hz	●	●	●	●
AC200V	200 VAC 50/60Hz	●	●	●	●
DC12V	12 VDC	●	●	●	●
DC24V	24 VDC	●	●	●	●
AC110V	110 VAC 50/60Hz	●	●	●	●
AC220V	220 VAC 50/60Hz	●	●	●	●

Code	Description	4F4	4F5	4F6	4F7
<b>* Other made-to-order products</b>					
DC48V		●	●	●	●
DC100V		●	●	●	●
DC110V		●	●	●	●

### ⚠ Precautions for model No. selection

- \*1: Consult with CKD when using vacuum with the external pilot (K), cylinder pressurizing and exhaust pressurizing. Cannot be selected for NPT and G threads. Manual override M3 cannot be selected.
- \*2: 12 VDC models are not available for BL and GL.
- \*3: The DC type of BL and GL has a built-in surge suppressor.
- \*4: Contact CKD as WC outdoor specifications (low temperature environment) are made to order supported.


[Model No. example]

**4F440-08-M2BW-AC100V**

- A Model : 4F4
- B Solenoid position : 3-position A/B/R connection
- C Port size : Rc1/4
- D Manual override : Non-locking
- E Electrical connections : Round terminal box (G1/2)
- F Other options : No option
- G Voltage : 100 VAC

## 4F4 to 7 Discrete installation method

● Mounting

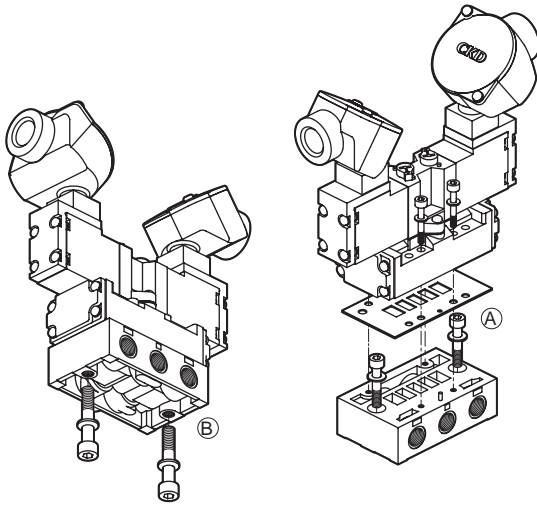

	For B	For A
4F4	M8	M6
4F5	M8	M6
4F6	M10	M8
4F7	M12	M10

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders



Related  
products

Safety  
precautions

## Dimensions



### 4F410

- 2-position single

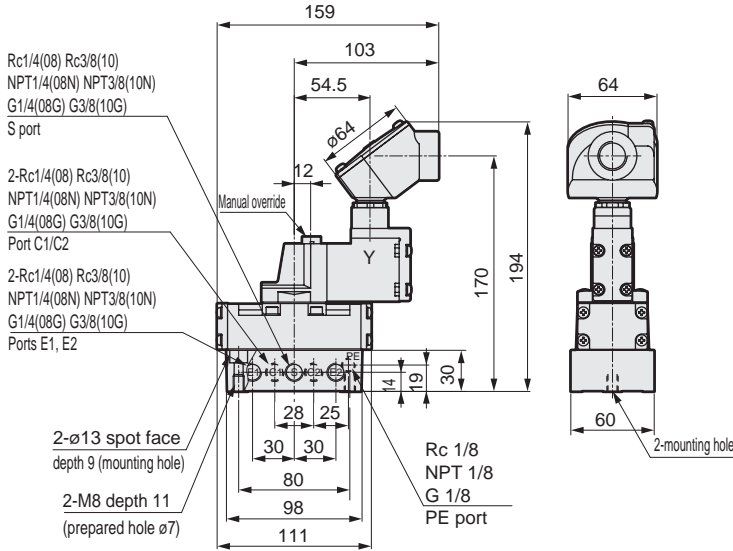



### 4F420

- 2-position double

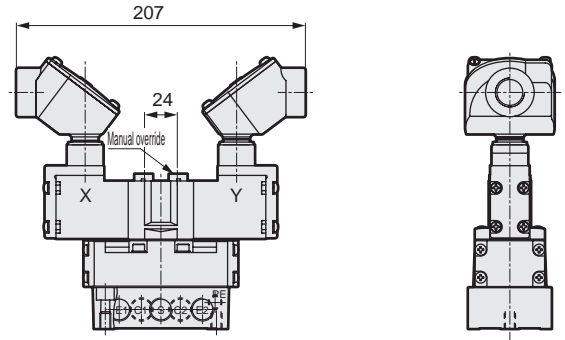


### 4F440

- 3-position

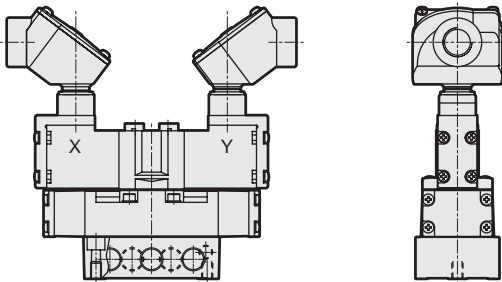


### 4F4

- External pilot port (K)
- 2 position single

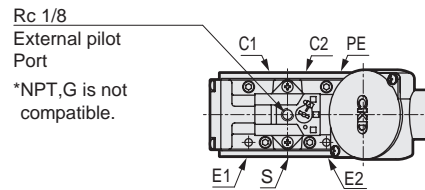

- 2-position double solenoid/3-position


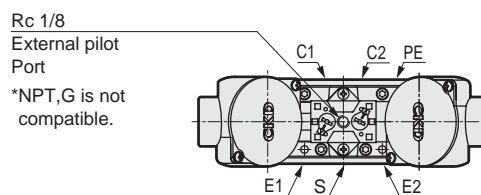


\* Refer to "Pneumatic Valves (Catalog No.CB-023SA)" for check valves.

## Dimensions




### 4F510

● 2-position single

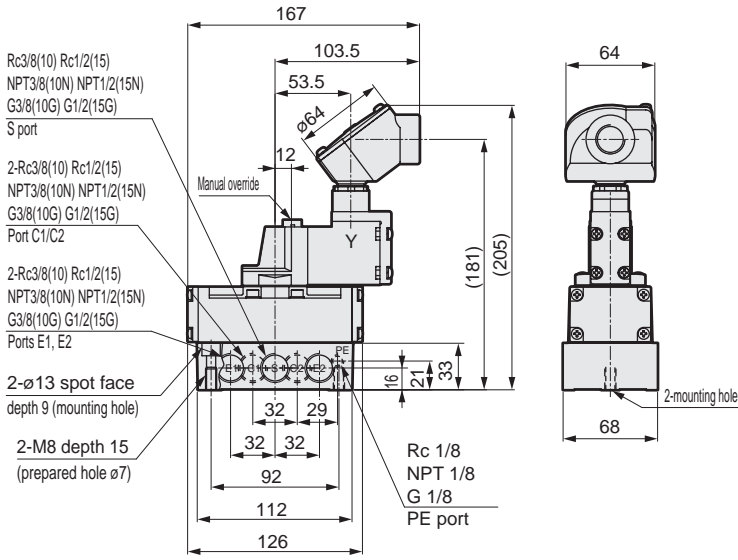



### 4F520

● 2-position double

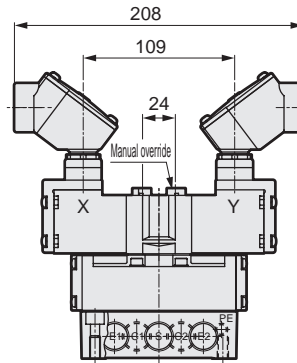

### 4F540

● 3-position




### 4F5

● External pilot port (K)

• 2 position single

Rc 1/8  
External pilot  
Port


\*NPT,G is not  
compatible.



• 2-position double solenoid/3-position

Rc 1/8  
External pilot  
Port

\*NPT,G is not  
compatible.



Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions


\* Refer to "Pneumatic Valves (Catalog No.CB-023SA)" for check valves.

# 4F6-W Series

## Dimensions

### 4F610

● 2-position single

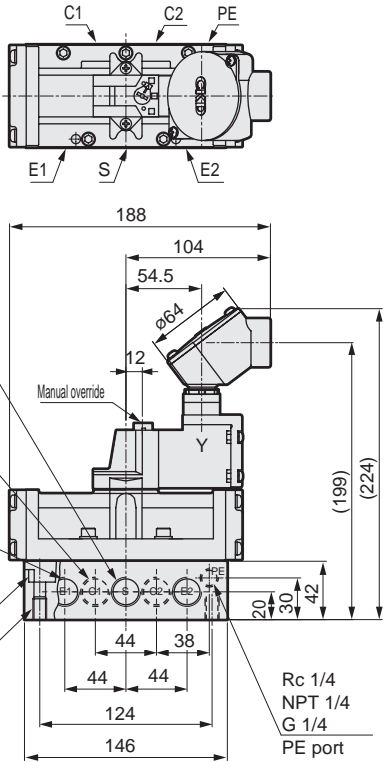

Rc1/2(15) Rc3/4(20)  
NPT1/2(15N) NPT3/4(20N)  
G1/2(15G) G3/4(20G)  
S port

2-Rc1/2(15) Rc3/4(20)  
NPT1/2(15N) NPT3/4(20N)  
G1/2(15G) G3/4(20G)  
Port C1/C2

2-Rc1/2(15) Rc3/4(20)  
NPT1/2(15N) NPT3/4(20N)  
G1/2(15G) G3/4(20G)  
Ports E1, E2


2- $\phi 13$  spot face  
depth 15

2-M15  
depth 11(prepared hole  $\phi 9$ )

Rc 1/4  
NPT 1/4  
G 1/4  
PE port

### 4F620

● 2-position double

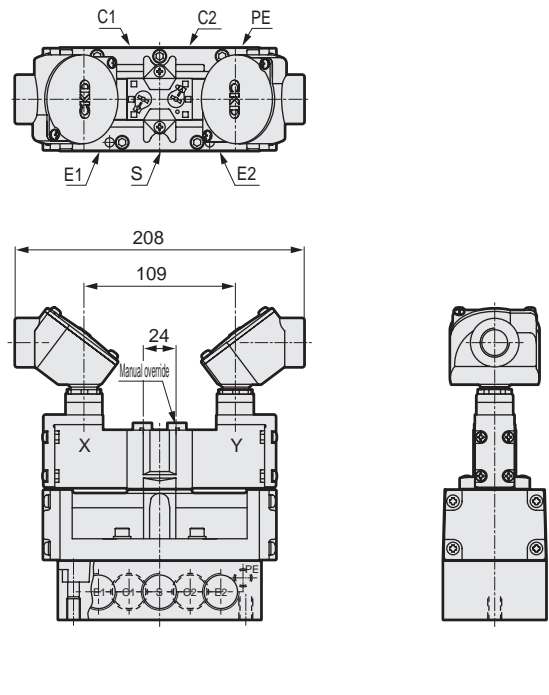


Manual override

2-mounting hole

### 4F640

● 3-position

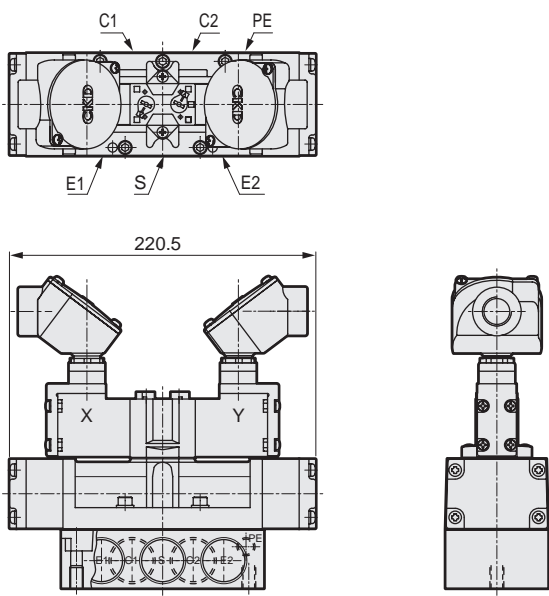

Rc1/2(15) Rc3/4(20)  
NPT1/2(15N) NPT3/4(20N)  
G1/2(15G) G3/4(20G)  
S port

2-Rc1/2(15) Rc3/4(20)  
NPT1/2(15N) NPT3/4(20N)  
G1/2(15G) G3/4(20G)  
Port C1/C2

2-Rc1/2(15) Rc3/4(20)  
NPT1/2(15N) NPT3/4(20N)  
G1/2(15G) G3/4(20G)  
Ports E1, E2

2- $\phi 13$  spot face  
depth 15


2-M15  
depth 11(prepared hole  $\phi 9$ )

Rc 1/4  
NPT 1/4  
G 1/4  
PE port

### 4F6

● External pilot port (K)


• 2 position single

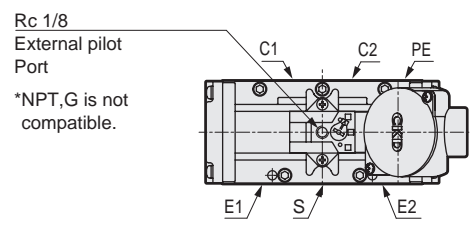

Rc 1/8  
External pilot  
Port

\*NPT,G is not  
compatible.

• 2-position double solenoid/3-position

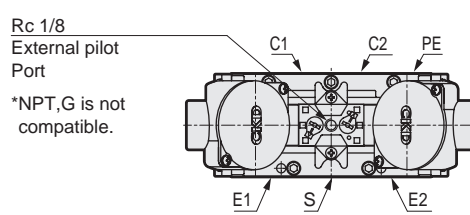

Rc 1/8  
External pilot  
Port

\*NPT,G is not  
compatible.


\* Refer to "Pneumatic Valves (Catalog No.CB-023SA)" for check valves.



## Dimensions


### 4F710

● 2-position single

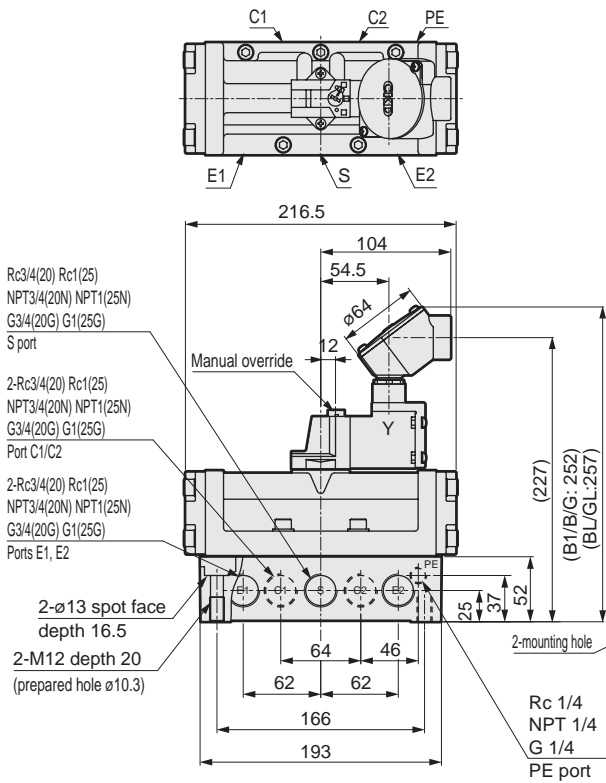


### 4F720

● 2-position double

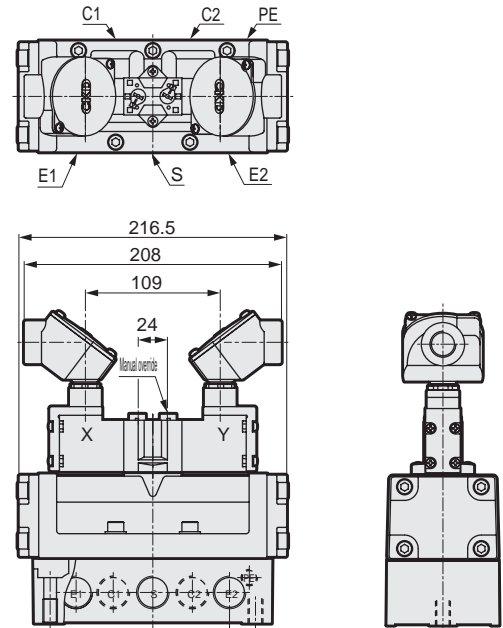

### 4F740


● 3-position

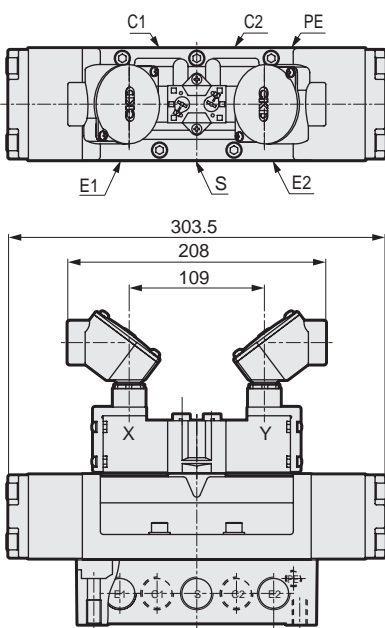


### 4F7

● External pilot port (K)

• 2 position single

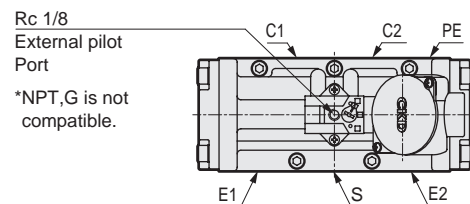

• 2-position double solenoid/3-position

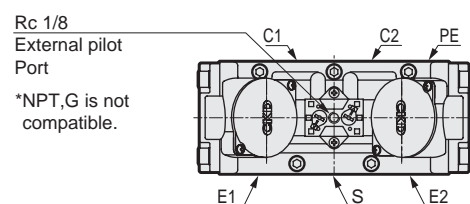

\* Refer to "Pneumatic Valves (Catalog No.CB-023SA)" for check valves.

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions




Direct acting 2-port solenoid valve, single unit  
General purpose

# AB41-W Series

- NC (Open when energized)
- Port size: Rc1/4 to Rc1/2



## JIS symbol




## Common specifications

Item	Standard specifications
Working fluid	Air/Low vacuum ( $1.33 \times 10^2$ Pa(abs))/Water/Kerosene/Oil (50mm <sup>2</sup> /s or less *1)
Working pressure differential MPa	0 to 5 (refer to max. working pressure differential in individual specifications.)
Proof pressure(water pressure)MPa	25
Fluid temperature °C	Nitrile rubber(D):-20 to 60 (no freezing) Fluoro rubber(E):-10 to 60 (no freezing)
Ambient temperature °C	Nitrile rubber(D): -20 to 60, fluoro rubber(E):-10 to 60
Thermal class	Class 130 (B)
Working environment	Indoors/outdoors
Atmosphere	A place free of corrosive gases, liquids, chemicals, and explosive gases
Valve structure	Direct acting poppet structure
Valve seat leakagecm <sup>3</sup> /min(ANR)	0.2 or less (air)
Mounting orientation	Limited to vertical orientation with the coil on top
Degree of protection	IP65

\*1: Dynamic viscosity varies depending on temperature. Check that the dynamic viscosity is 50 mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 50 mm<sup>2</sup>/s, operation will become unstable.

## Mounting orientation



## Individual specifications

Item	Port size	Orifice size (mm)	Max. working pressure differential (MPa)			Max. Working pressure (MPa)	Rated voltage	Apparent power(VA)				Power consumption(W)		Weight (kg)
			Air	Water/hot water/kerosene	Oil (50mm <sup>2</sup> /s)			When holding	When starting	AC				
Model No.			AC	AC	AC			50Hz	60Hz	50Hz	60Hz	50/60Hz		
<b>NC (open when energized)</b>														
AB41- <sup>02</sup> / <sub>03</sub> -1	Rc1/4 Rc3/8	1.5	5.0	4.5	4.0	5	100 VAC 50/60Hz *5	18	15	29	24	6.7/5.7		0.8 (Rc1/4)
-2		2.0	3.0	2.7	2.5									
-3		3.0	1.5	1.3	0.9									
-4		3.5	1.2	0.9	0.6									
-5		4.0	1.0	0.7	0.5									
-6		5.0	0.6	0.4	0.25									
-7		7.0	0.25	0.2	0.15									
AB41- <sup>03</sup> / <sub>04</sub> -8	Rc3/8 Rc1/2	10.0	0.1	0.1	0.05									1.15

\*1: The model numbers above are for the basic port size (Rc)and orifice size. Refer to How to order for other combinations.

\*2: The port size model No. is 02 for Rc1/4 (8A), 03 for Rc3/8 (10A) and 04 for Rc1/2 (15A).

\*3: The voltage fluctuation range must be within  $\pm 10\%$  of the rated voltage.

\*4: When using at low vacuum, vacuum the OUT port side.

\*5: 100VAC (50/60 Hz) can also be used with 110VAC (60 Hz). The 200 VAC (50/60 Hz) type can be used with 220 VAC (60 Hz).


## Flow characteristics

Model No.	Port size	Orifice size (mm)	Flow characteristics		
			C[dm <sup>3</sup> /(s*bar)]	b	Cv
<b>NC (open when energized)</b>					
AB41- <sup>01</sup> / <sub>02</sub> -1	Rc 1/4 Rc 3/8	1.5	0.29	0.53	0.1
-2		2.0	0.53	0.52	0.15
-3		3.0	1.1	0.52	0.31
-4		3.5	1.5	0.47	0.40
-5		4.0	1.9	0.47	0.48
-6		5.0	2.6	0.38	0.62
-7		7.0	4.6	0.37	0.82
AB41- <sup>03</sup> / <sub>04</sub> -8	Rc 3/8 Rc 1/2	10.0	8.1	0.31	1.5

\*1: Effective cross-sectional area S and sonic conductance C are converted as  $S \approx 5.0 \times C$ .

### How to order

● NC (Normally Closed)



Model No.	
AB41	AB41 Low pressure Large flow rate

Code			
<b>A Port size</b>			
02	Rc1/4	●	
03	Rc3/8	●	●
04	Rc1/2		●

<b>B Orifice size</b>			
1	ø1.5	●	
2	ø2	●	
3	ø3	●	
4	ø3.5	●	
5	ø4	●	
6	ø5	●	
7	ø7	●	
8	ø10		●

<b>C Body/sealant combination</b>					
	Body	Seal	Remarks		
D	Stainless	Nitrile rubber *5	air/water/low vacuum/kerosene/oil	●	●
E	steel	Fluoro rubber *5	air/water/low vacuum/kerosene/oil	●	●

**D to I**

Refer to the following table for details on the coil housing, other options, voltage, etc.

<b>H Warranty period</b>	
W	1 year after delivery
WG	3 years after delivery (with inspection certificate, inspection guidelines, traceability system diagram) *3*4

The combinations indicated with ● in the above table are available.

[Example of model No. 1]

**AB41-02-3-E3EWG-AC100V**

Model: AB41

- A** Port size : Rc1/4
- B** Orifice size : ø3
- C** Body/sealant combination : Body - stainless steel, sealant - fluoro rubber
- D** Coil housing : Open frame with round terminal box
- E to G** : None
- H** Warranty period : 3 years after delivery
- I** Rated voltage : 100 VAC 50/60 Hz, 110 VAC 60 Hz

For Items ④ to ⑩, the combinations indicated with codes are available.

Note that if options for Items ⑤ to ⑦ are not required, it should be blank.

<b>D Coil housing</b>		<b>E</b>	<b>F Other options</b>			<b>G</b>	<b>I Rated voltage</b>	
Description		Mounting plate	Cable gland			With surge suppressor	Description	
			(marine cable gland)					
			A-15a	A-15b	A-15c			
<b>3E</b>	Open	With round terminal box (G1/2)	<b>B</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>S</b>	100 VAC, 200 VAC
<b>3L</b>	Frame type	Round terminal box with lamp(G1/2)						

⚠ Refer to the following cautions for Items ③ to ⑩.

### ⚠ Precautions for model No. selection

Notes for Items ③ to ⑨

- \*1: For Item ⑥, select an option from D, E and F.
- \*2: The surge suppressor is mounted in the terminal box.
- \*3: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use.
- \*4: For option WG, the specifications and drawings must be agreed upon.
- \*5: The ambient temperature for option D is -20°C to 60°C.  
For option E, the ambient temperature is -10°C to 60°C.

Notes for Item ⑩

- \*6: 100 VAC coil can be used at 100 VAC 50/60Hz and 110 VAC 60Hz, and 200 VAC coil can be used at 200 VAC 50/60Hz and 220 VAC60Hz.

# AB41-W Series


## Dimensions: AB41-W Series



● Open frame + round terminal box

AB41-\*.\*\*.\*3E  
3L

[ ] is for AB41-\*.\*\*.\*3L Type

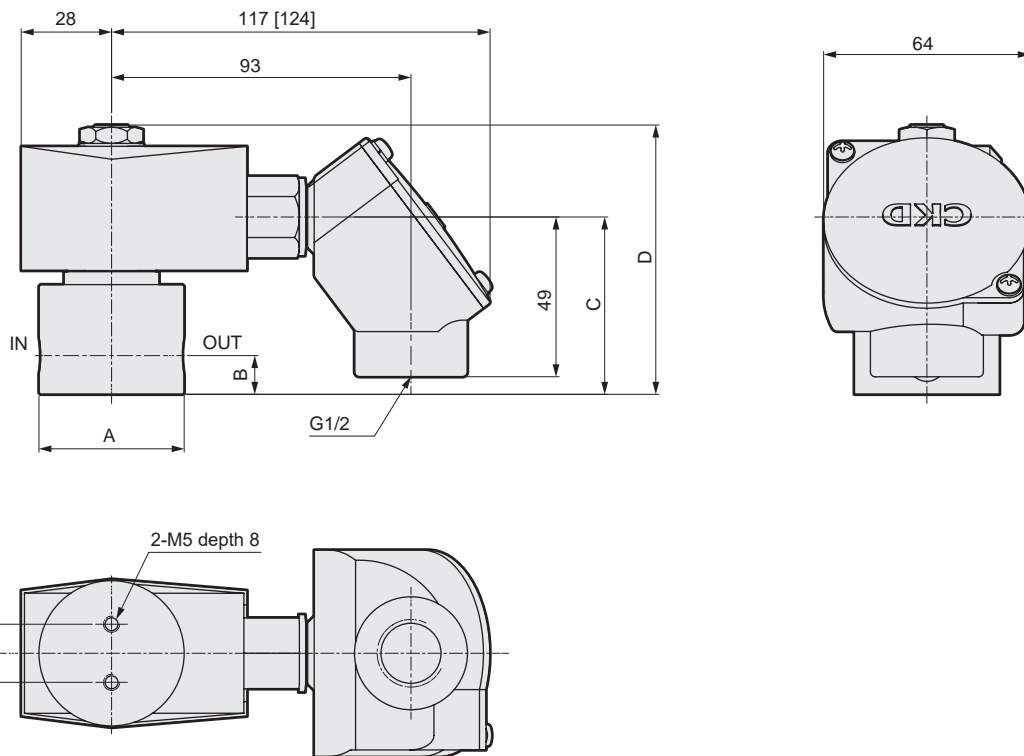

Model No.	A	B	C	D
AB41, 41-02-1 to 6	ø37.5	11	52	80.5
AB41, 41-02-7 -03-1 to 7	ø45	12	55	83.5
AB41, 41-03-8 -04-8	50 <sup>*1</sup>	15	64	93


\*1: The max. dimension is ø54.

Drain separator F.R.L. unit  
 Pneumatic auxiliary components  
 Pneumatic valves  
 Fluid control valves  
 Pneumatic cylinders  
 Related products  
 Safety precautions

## Option dimensions: AB41-W Series




- Mounting plate  
AB41-\*\*-\*\***[B]**

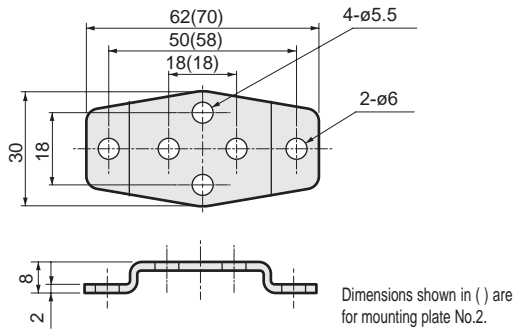

Mounting plate model No.	Compatibility
AB4-W-GE-100106-MOUNT-PLATE-KIT (Mounting plate No.1)	AB41-02-1 to 6
AB4-W-GE-100159-MOUNT-PLATE-KIT (Mounting plate No.2)	AB41-02-7 AB41-03-1 to 8 AB41-04-8

- Cable gland  
AB41-\*\*-\*\***[3E]** **[D]**  
**[3L]** **[E]**  
**[F]**

[ ] is for AB41-\*\*-\*\***[3L]** Type

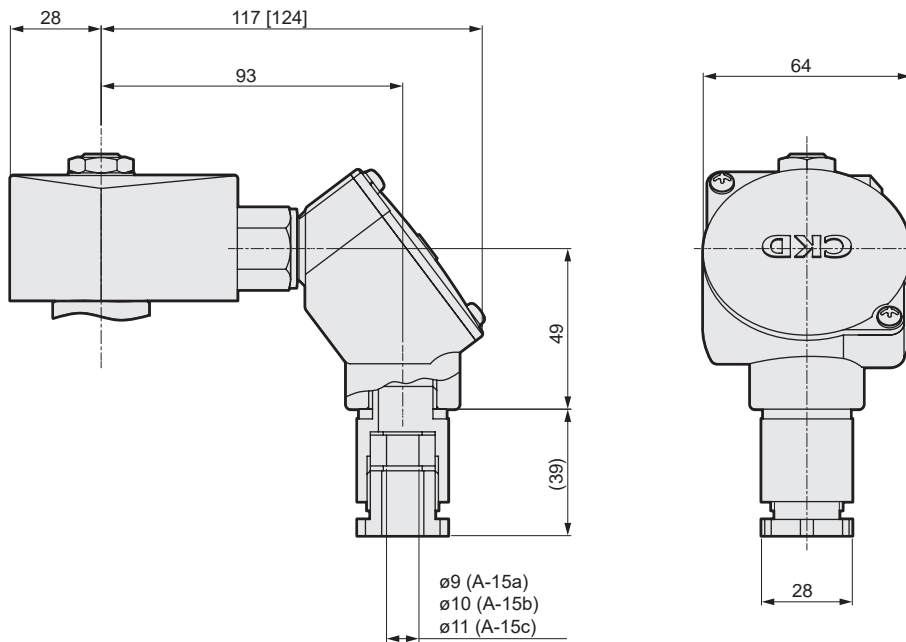

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions




Direct acting 3-port solenoid valve, single unit  
General purpose

# AG41-W Series

- Universal
- Port size: Rc1/4, Rc3/8



## JIS symbol




## Common specifications

Item	Standard specifications	
Working fluid	Air/low vacuum(1.33 x 10 <sup>2</sup> Pa(abs))/Water/kerosene/oil(50 mm <sup>2</sup> /s or less *1)	
Working pressure differential MPa	0 to 1 (refer to max. working pressure differential in individual specifications.)	
Max. working pressure MPa	1	
Proof pressure(water pressure)MPa	25	
Fluid temperature °C	Nitrile rubber(D):-20 to 60 (no freezing) Fluoro rubber(E):-10 to 60 (no freezing)	
Ambient temperature °C	Nitrile rubber(D): -20 to 60, fluoro rubber(E):-10 to 60	
Thermal class	Class 130 (B)	
Working environment	Indoors/outdoors	
Atmosphere	A place free of corrosive gases, liquids, chemicals, and explosive gases	
Valve structure	Direct acting poppet structure	
Valve seat leakagecm <sup>3</sup> /min(ANR)	0.2 or less(in air)	
Mounting orientation	Limited to vertical orientation with the coil on top	
Degree of protection	IP65	

\*1: Dynamic viscosity varies depending on temperature. Check that the dynamic viscosity is 50 mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 50 mm<sup>2</sup>/s, operation will become unstable.

## Mounting orientation



## Individual specifications

Item Model No.	Connection Bore size	Orifice size (mm)		Max. working pressure differential (MPa)			Rated voltage	Apparent power(VA)				Power consumption(W) AC 50/60Hz	Weight (kg)
		TOP	BODY	Air	Water/hot water/kerosene	Oil(50 mm <sup>2</sup> /s)		When holding		When starting			
				AC	AC	AC		50Hz	60Hz	50Hz	60Hz		
AG41-02-1	Rc1/4	2.0	2.0	1.0	1.0	0.4	100 VAC 50/60Hz *4 200 VAC 50/60Hz *4	22	17	35	27	8.3/6.2	0.85
-02-2		2.3	2.3	0.7	0.7	0.25							
-03-1	Rc3/8	2.0	2.0	1.0	1.0	0.4							
-03-2		2.3	2.3	0.7	0.7	0.25							

\*1: The model numbers above are for the basic port size (Rc)and orifice. Refer to How to order for other combinations.

\*2: The voltage fluctuation range must be within ±10% of the rated voltage.

\*3: When using in a continuously energized state, use fluoro rubber seal.

\* 4: 100VAC (50/60 Hz) can also be used with 110VAC (60 Hz). The 200 VAC (50/60 Hz) type can be used with 220 VAC (60 Hz).


## Flow characteristics

Model No.	Port size	Orifice size(mm)		Flow characteristics					
		TOP	BODY	C[dm <sup>3</sup> /(s·bar)]		b		Cv	
				TOP	BODY	TOP	BODY	TOP	BODY
AG41-02-1	Rc 1/4	2.0	2.0	0.53	0.53	0.54	0.52	0.15	0.15
-02-2		2.3	2.3	0.74	0.74	0.66	0.53	0.19	0.19
-03-1	Rc 3/8	2.0	2.0	0.53	0.53	0.54	0.52	0.15	0.15
-03-2		2.3	2.3	0.74	0.74	0.66	0.53	0.19	0.19

\*1: Effective cross-sectional area S and sonic conductance C are converted as S ≈ 5.0 x C.



### How to order

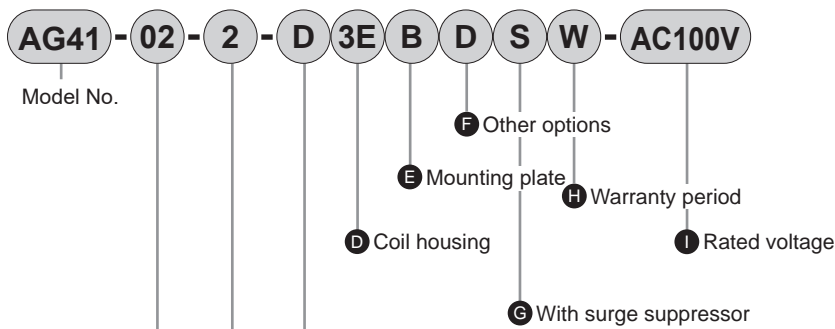

Code	Description		
<b>A Port size</b>			
02	Rc1/4		
03	Rc3/8		
<b>B Orifice size</b>			
	<b>TOP</b>	<b>BODY</b>	
1	ø2.0	ø2.0	
2	ø2.3	ø2.3	
<b>C Body/sealant combination</b>			
	<b>Body</b>	<b>Seal</b>	<b>Remarks</b>
D	Stainless	Nitrile rubber *5	air/water/low vacuum/kerosene/oil
E	steel	Fluoro rubber *5	air/water/low vacuum/kerosene/oil
<b>D to I</b>			
Refer to the following table for details on the coil housing, other options, voltage, etc.			
<b>H Warranty period</b>			
W	1 year after delivery		
WG	3 years after delivery *3*4 (with inspection certificate, inspection guidelines, traceability system diagram)		

[Example of model No.]

### AG41-03-2-E3EWG-AC100V

Model: AG41

- A** Port size : Rc3/8
- B** Orifice size : TOP-ø2.3, BODY-ø2.3
- C** Body/sealant combination : Body - stainless steel, sealant - fluoro rubber
- D** Coil housing : Open frame with round terminal box
- E to G** : None
- H** Warranty period : 3 years after delivery
- I** Rated voltage : 100 VAC50/60Hz, 110VAC60Hz

For Items **D** to **I**, the combinations indicated with codes are available.  
Note that if options for Items **E** to **G** are not required, it should be blank.

<b>D Coil housing</b>			<b>E</b>	<b>F Other options</b>			<b>G</b>	<b>I Rated voltage</b>
Description			Mounting plate	Cable gland			With surge suppressor	Description
				(marine cable gland)				
				A-15a	A-15b	A-15c		
<b>3E</b>	Open	With round terminal box (G1/2)	<b>B</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>S</b>	100 VAC, 200 VAC
<b>3L</b>	Frame type	Round terminal box with lamp(G1/2)						

⚠ Refer to the following cautions for Items **C** to **I**.

### ⚠ Precautions for model No. selection

#### Notes for Items **C** to **H**

- \*1: For Item **E**, select an option from D, E and F.
- \*2: The surge suppressor is mounted in the terminal box.
- \*3: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use.
- \*4: For option WG, the specifications and drawings must be agreed upon.
- \*5: The ambient temperature for option D is -20°C to 60°C.  
For option E, the ambient temperature is -10°C to 60°C.

#### Notes for Item **I**

- \*6: 100 VAC coil can be used at 100 VAC50/60Hz and 110 VAC60Hz, and 200 VAC coil can be used at 200 VAC50/60Hz and 220 VAC60Hz.

Drain separator  
 F.R.L. unit  
 Pneumatic auxiliary  
 components  
 Pneumatic  
 valves  
 Fluid control  
 valves  
 Pneumatic  
 cylinders  
 Related  
 products  
 Safety  
 precautions

# AG41-W Series

## Dimensions: AG41-W Series





● Open frame + round terminal box

AG41-\*.\*\*.\* 3E  
3L

[ ] is for AG41-\*.\*\*.\*3L Type

[Reference]As the JIS symbol flow shows, pressure can be applied from any of the three piping ports. Generally, two orifices (TOP, BODY) have the same value and rated pressure.  
 When not energized: COM → NO or NO → COM  
 When energized :COM → NC or NC → COM

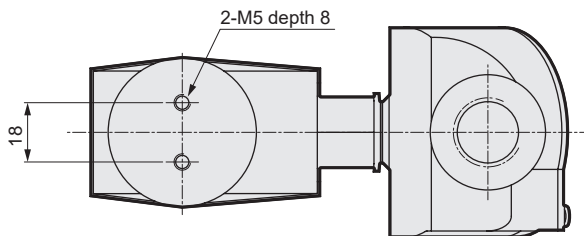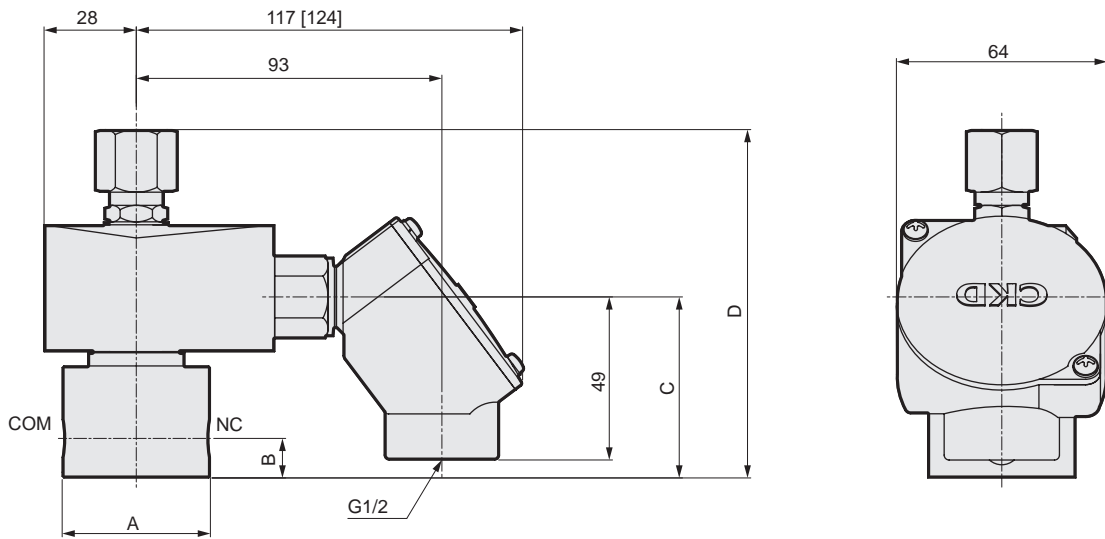

Model No.	A	B	C	D
AG41-02-1 to 2	ø37.5	11	52	99.5
AG41-03-1 to 2	ø45	12	55	106

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders


Related  
products

Safety  
precautions

## Option Dimensions: AG41-W Series



● Mounting plate  
AG41-\*\*-\*\***[B]**

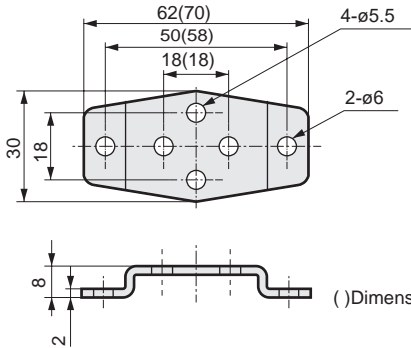


( ) Dimensions shown in are for mounting plate No.2.

Mounting plate model No.	Compatibility
AG4-W-GE-100106-MOUNT-PLATE-KIT (mounting plate No.1)	AG41-02-1 to 2
AG4-W-GE-100159-MOUNT-PLATE-KIT (mounting plate No.2)	AG41-03-1 to 2

● Cable gland  
AG41-\*\*-\*\***[3E]** **[D]**  
**[3L]** **[E]**  
**[F]**

[ ] is for AG41-\*\*-\*\***[3L]** Type

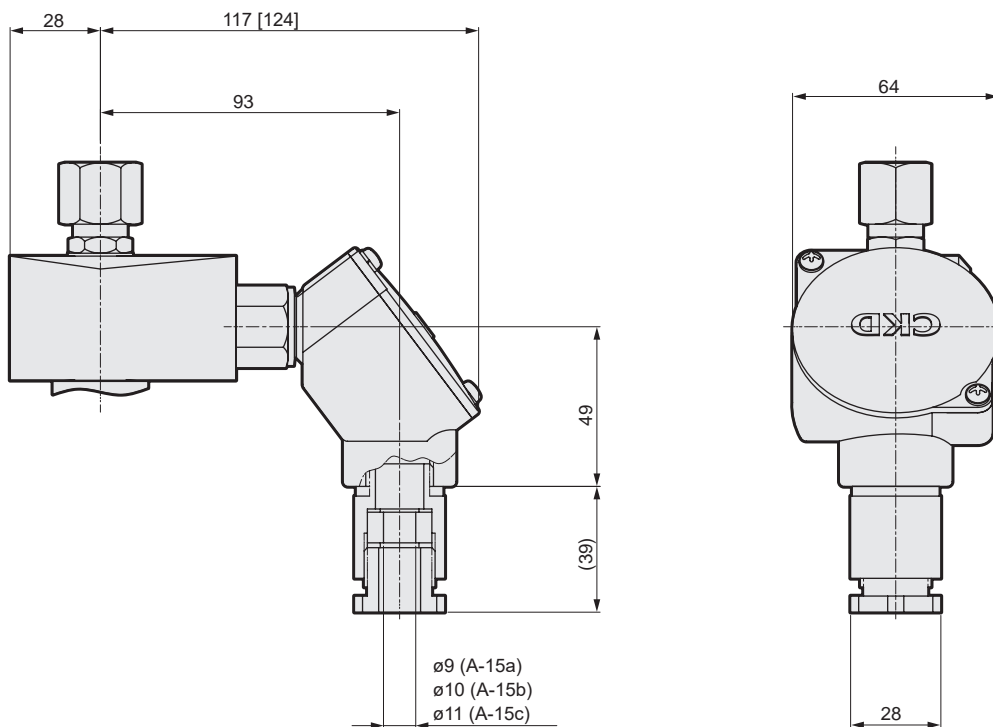

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions




Pilot kick 2-port solenoid valve  
(general purpose valve)

# ADK11-W Series

- NC (Normally Closed)
- Port size: Rc1/2 to Rc1
- Diaphragm drive



## JIS symbol




## Common specifications

Item	Standard specifications
Working fluid	Air/low vacuum ( $1.33 \times 10^3$ Pa (abs))/water/kerosene/oil (50mm <sup>2</sup> /s or less *2)
Working pressure differential MPa	0 to 1.0 (refer to max. working pressure differential in individual specifications.)
Max. working pressure MPa	2
Proof pressure (water pressure) MPa	4
Fluid temperature °C	Nitrile rubber(D): -20 to 60 (no freezing) Fluoro rubber(E): 5 to 60 (no freezing)
Ambient temperature °C	Nitrile rubber(D): -20 to 60, fluoro rubber(E): -10 to 60
Thermal class	Class 130 (B)
Working environment	Indoors/outdoors
Atmosphere	A place free of corrosive gases, liquids, chemicals, and explosive gases
Valve structure	Pilot kick poppet, diaphragm drive
Valve seat leakage (*1) cm <sup>3</sup> /min (ANR)	1 or less (air)
Mounting orientation	Limited to vertical orientation with the coil on top
Degree of protection	IP65

\*1: Value at pneumatic pressure 0.02 to 1.0MPa. When used at a pressure less than 0.02MPa, the operation or sealant may be unstable. Contact CKD in this case.

\*2: Dynamic viscosity varies depending on temperature. Check that the dynamic viscosity is 50mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 50 mm<sup>2</sup>/s, operation will become unstable.

## Mounting orientation



## Individual specifications

Item	Port size	Orifice (mm)	Min. working pressure differential (MPa)	Max. working pressure differential (MPa)			Rated voltage	Apparent power (VA)				Power consumption (W)	Weight (kg)
				Air	Water/kerosene	Oil (50mm <sup>2</sup> /s)		When holding		When starting			
				AC	AC	AC		50Hz	60Hz	50Hz	60Hz		
<b>NC (open when energized)</b>													
ADK11-15A	Rc1/2	16	0	1	1	0.6	AC100V 50/60Hz AC200V 50/60Hz	25	21	84	75	10/8.5	1.2
ADK11-20A	Rc3/4	23											1.3
ADK11-25A	Rc1	28											1.7

\*1: The model numbers above show the basic port size (Rc). Refer to How to order for other combinations.

\*2: The voltage fluctuation range must be within ±10% of the rated voltage.


\*3: When using at low vacuum, vacuum the OUT port side.

## Flow characteristics

Model No.	Port size	Orifice size (mm)	Flow characteristics			
			C [dm <sup>3</sup> /(s·bar)]	b	Cv	S (mm <sup>2</sup> )
<b>NC (open when energized)</b>						
ADK11-15A	Rc1/2	16	20	0.31	4.5	-
ADK11-20A	Rc3/4	23	-	-	8.6	162
ADK11-25A	Rc1	28	-	-	12.0	231

\*1: Effective cross-sectional area S and sonic conductance C are converted as  $S \approx 5.0 \times C$ .

### How to order

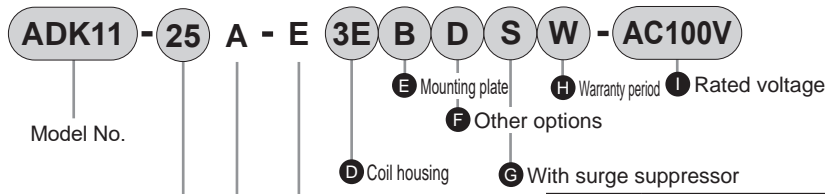

Code	Description		
<b>A Port size</b>			
15	1/2		
20	3/4		
25	1		
<b>B Thread</b>			
A	Rc		
<b>C Body/sealant combination</b>			
	<b>Body</b>	<b>Seal</b>	<b>Remarks</b>
D	Stainless	Nitrile rubber *5	air/water/low vacuum/kerosene/oil
E	steel	Fluoro rubber *5	air/water/low vacuum/kerosene/oil
<b>D to I</b>			
Refer to the following table for details on the coil housing, other options, voltage, etc.			
<b>H Warranty period</b>			
W	1 year after delivery		
WG	3 years after delivery *3*4 (with inspection certificate, inspection guidelines, traceability system diagram)		

[Example of model No. 1]

### ADK11-15A-E3EWG-AC100V

- A** Port size : 1/2
- B** Thread : Rc
- C** Body/sealant combination : Body - stainless steel, sealant - fluoro rubber
- D** Coil housing: Open frame with round terminal box
- E** to **G** : None
- H** Warranty period : 3 years after delivery
- I** Rated voltage : 100 VAC 50/60Hz, 110 VAC 60Hz

For Items **D** to **I**, the combinations indicated with codes are available.  
Note that if options for Items **E** to **G** are not required, it should be blank.

<b>D Coil housing</b>			<b>E</b>	<b>F Other options</b>			<b>G</b>	<b>I Rated voltage</b>
Description			Mounting plate	Cable gland			With surge suppressor	Description
				(marine cable gland)				
				A-15a	A-15b	A-15c		
<b>3E</b>	Open	With round terminal box (G1/2)	<b>B</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>S</b>	100 VAC, 200 VAC
<b>3L</b>	Frame type	Round terminal box with lamp(G1/2)						

⚠ Refer to the following cautions for Items **C** to **I**.

### ⚠ Precautions for model No. selection

#### Notes for Items **C** to **H**

- \*1: For Item **E**, select an option from D, E and F.
- \*2: The surge suppressor is mounted in the terminal box.
- \*3: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use.
- \*4: For option WG, the specifications and drawings must be agreed upon.
- \*5: The ambient temperature for option D is -20°C to 60°C.  
For option E, the ambient temperature is -10°C to 60°C.

#### Notes for Item **I**

- \*6: 100 VAC coil can be used at 100 VAC50/60Hz and 110 VAC60Hz, and 200 VAC coil can be used at 200 VAC50/60Hz and 220 VAC60Hz.

Drain separator  
F.R.L. unit  
Pneumatic auxiliary components  
Pneumatic valves  
Fluid control valves  
Pneumatic cylinders  
Related products  
Safety precautions


# ADK11-W Series

## Dimensions: ADK11-W Series

- Open frame + round terminal box

ADK11-15A/20A/25A-\*3E  
3L

[ ] shows ADK11-15A/20A/25A-\*3L type.

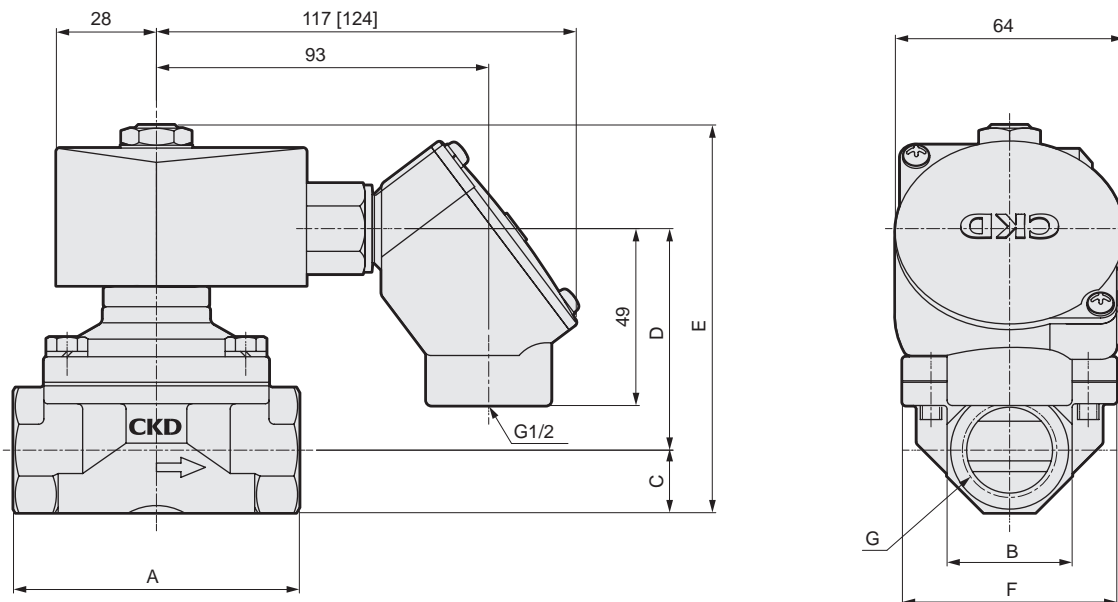


Model No.	A	B	C	D	E	F	G
ADK11-15A-*3E/3L	71	29	14.5	58.5	102	50	Rc1/2
ADK11-20A-*3E/3L	80	35	17.5	62	108.5	60	Rc3/4
ADK11-25A-*3E/3L	90	45	22.5	67.5	119	71	Rc1

Drain separator F.R.L. unit  
 Pneumatic auxiliary components  
 Pneumatic valves  
 Fluid control valves  
 Pneumatic cylinders  
 Related products  
 Safety precautions



## Dimensions: ADK11-W Series

- Mounting plate  
ADK11-15A/20A/25A-\*B

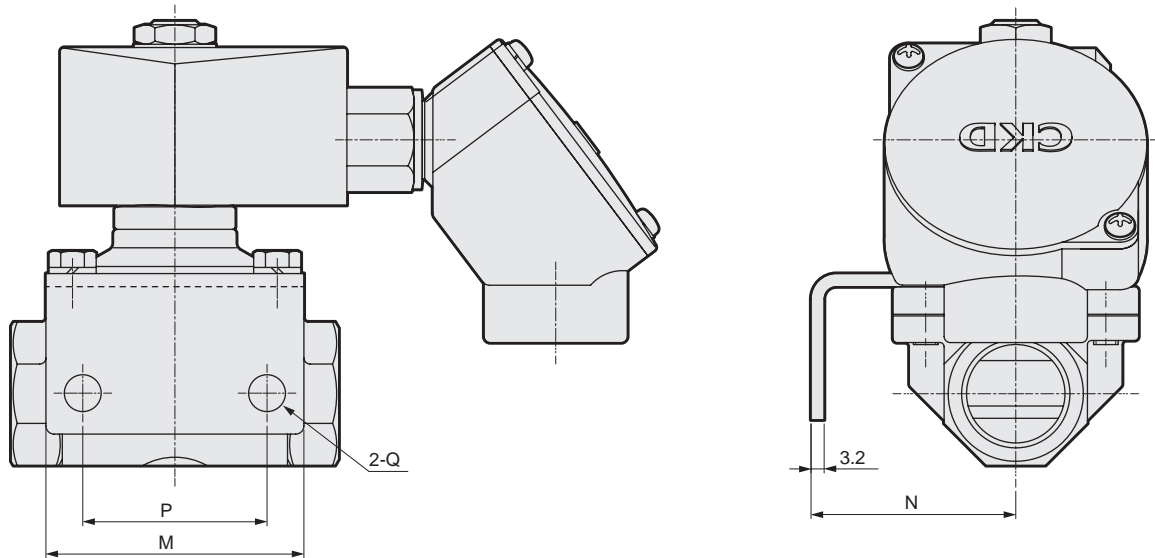

Model No.	M	N	P	Q
ADK11-15A-*3E/3LB	56	45	40	ø9
ADK11-20A-*3E/3LB	63	50	45	ø9
ADK11-25A-*3E/3LB	75	56	50	ø11


- Open frame + round terminal box + cable gland  
ADK11-15A/20A/25A-\*

3E	D
3L	E
	F

[ ] shows ADK11-15A/20A/25A-\*

3L
----

 type.

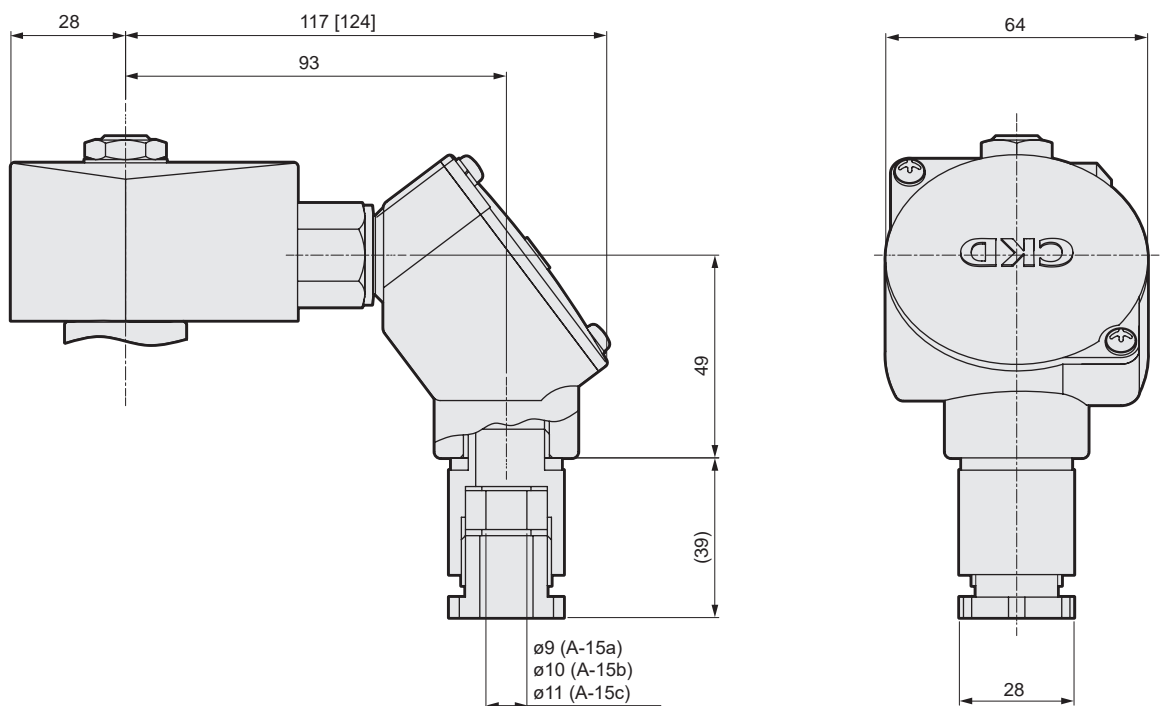

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions




Pilot kick 2-port solenoid valve  
General purpose

# ADK21-W Series

- NC (Normally Closed)
- Port size: Rc1<sup>1</sup>/<sub>4</sub> to Rc2, 32 to 50 flange
- Diaphragm drive



## JIS symbol




## Common specifications

Item	Standard specifications
Working fluid	Air/low vacuum (1.33 × 10 <sup>3</sup> Pa (abs)/water/kerosene/oil (50mm <sup>2</sup> /s or less *2)
Working pressure differential MPa	0 to 0.7 (refer to max. working pressure differential in individual specifications.)
Max. working pressure MPa	1
Proof pressure (water pressure) MPa	3.2
Fluid temperature °C	Nitrile rubber(D): -20 to 60 (no freezing) Fluoro rubber(E): 5 to 60 (no freezing)
Ambient temperature °C	Nitrile rubber(D): -20 to 60, fluoro rubber(E): -10 to 60
Thermal class	Class 130 (B)
Working environment	Indoors/outdoors
Atmosphere	A place free of corrosive gases, liquids, chemicals, and explosive gases
Valve structure	Pilot kick poppet, diaphragm drive
Valve seat leakage (*1) cm <sup>3</sup> /min (ANR)	1 or less (air)
Mounting orientation	Limited to vertical orientation with the coil on top
Degree of protection	IP65

\*1: Value at pneumatic pressure 0.02 to 0.7MPa. When used at a pressure less than 0.02 MPa, the sealant may be unstable. Contact CKD in this case.

\*2: Dynamic viscosity varies with temperature. Check that the dynamic viscosity is 50mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 50 mm<sup>2</sup>/s, operation will become unstable.

## Mounting orientation



## Individual specifications

Item Model No.	Connection Bore size	Orifice size (mm)	Min. working pressure differential (MPa)	Max. working pressure differential (MPa)			Rated voltage	Apparent power (VA)				Power consumption (W) AC 50/60Hz	Weight (kg)
				Air	Water/kerosene	Oil (50mm <sup>2</sup> /s)		When holding		When starting			
				AC	AC	AC		50Hz	60Hz	50Hz	60Hz		
ADK21-32A	Rc1 <sup>1</sup> / <sub>4</sub>	35	0	0.7	0.7	0.5	AC100V 50/60Hz AC200V 50/60Hz	64	69	274	289	44/48	4.5
ADK21-32F	32 flange												7.5
ADK21-40A	Rc1 <sup>1</sup> / <sub>2</sub>	43											5.5
ADK21-40F	40 flange												8.5
ADK21-50A	Rc2	53											6.5
ADK21-50F	50 flange												10.5

\*1: The model numbers above are for the basic port size. Refer to How to order for other combinations.


\*2: The voltage fluctuation range must be within ±10% of the rated voltage.

\*3: When using at low vacuum, vacuum the OUT port side.

## Flow characteristics

Model No.	Port size	Orifice size (mm)	Cv	Effective cross-sectional area (mm <sup>2</sup> )
ADK21-32A	Rc1 <sup>1</sup> / <sub>4</sub>	35	25	460
ADK21-32F	32 flange			
ADK21-40A	Rc1 <sup>1</sup> / <sub>2</sub>	43	34	625
ADK21-40F	40 flange			
ADK21-50A	Rc2	53	53	975
ADK21-50F	50 flange			

### How to order

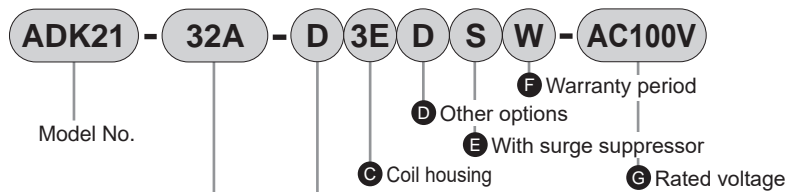

Code	Description		
<b>A Port size</b>			
32A	Rc1 <sup>1</sup> / <sub>4</sub>		
32F	32 flange		
40A	Rc1 <sup>1</sup> / <sub>2</sub>		
40F	40 flange		
50A	Rc2		
50F	50 flange		
<b>B Body/sealant combination</b>			
	Body	Seal	Remarks
D	Stainless	Nitrile rubber	*6 air/water/low vacuum/kerosene/oil
E	steel	Fluoro rubber	*6 air/water/low vacuum/kerosene/oil
<b>C to G</b>			
Refer to the following table for details on the coil housing, other options, voltage, etc.			
<b>F Warranty period</b>			
W	1 year after delivery		
WG	3 years after delivery (with inspection certificate, inspection guidelines, traceability system diagram) *4*5		

[Example of model No. 1]

### ADK21-50F-E3EWG-AC100V

Model: ADK21

- A** Port size : 50 flange
- B** Body/sealant combination : Body - stainless steel, sealant - fluoro rubber
- C** Coil housing : Open frame with round terminal box
- D** **E** : None
- F** Warranty period : 3 years after delivery
- G** Rated voltage : 100VAC 50/60Hz

For Items **C** to **G**, the combinations indicated with codes are available.  
Note that if options for Items **D** to **E** are not required, it should be blank.

<b>C Coil housing</b>		<b>D Other options</b>			<b>E</b>	<b>G Rated voltage</b>		
Description		Cable gland			With surge suppressor	Description		
		(marine cable gland)						
		A-15a	A-15b	A-15c				
<b>3E</b>	Open	With round terminal box (G1/2)		<b>D</b>	<b>E</b>	<b>F</b>	<b>S</b>	100 VAC, 200 VAC
<b>3L</b>	Frame type	Round terminal box with lamp (G1/2)						

⚠ Refer to the following cautions for Items **A** to **G**.

### ⚠ Precautions for model No. selection

#### Notes for Items **A** to **F**

- \*1: The companion flange is JIS B2210 10K. (Flange is not included with the product and must be purchased separately.)
- \*2: For Item **D**, select an option from D, E and F.
- \*3: The surge suppressor is mounted in the terminal box.
- \*4: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use.
- \*5: For option WG, the specifications and drawings must be agreed upon.
- \*6: The ambient temperature for option D is -20°C to 60°C.  
For option E, the ambient temperature is -10°C to 60°C.



Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

# ADK21-W Series


## Dimensions

● Open frame + round terminal box (Rc screw-in)

ADK21-32A/40A/50A-\* 3E  
3L

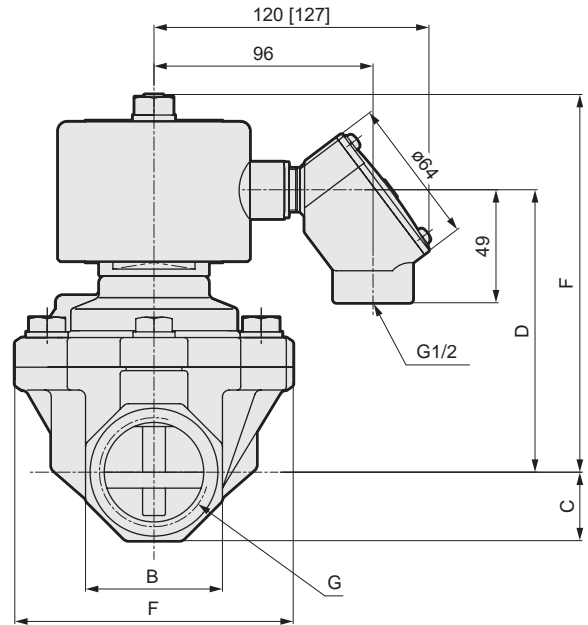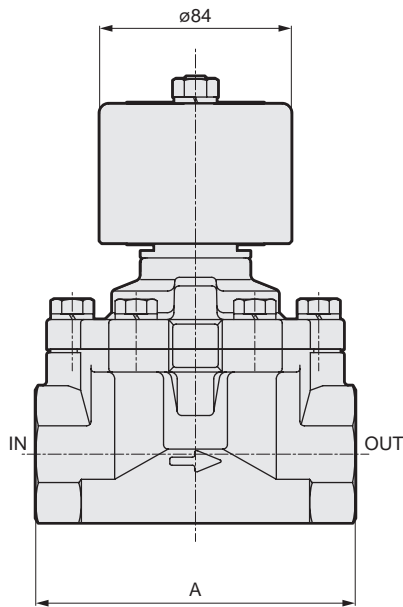



Model No.	A	B	C	D	E	F	G
ADK21-32A	125	54	27	116.5	158.5	112	Rc1 <sup>1</sup> / <sub>4</sub>
ADK21-40A	140	60	30	123.5	165.5	122	Rc1 <sup>1</sup> / <sub>2</sub>
ADK21-50A	160	74	37	132.5	174.5	132	Rc2




● Conduit size  
Thin steel conduit thread  
JIS B 0204 CTC19

● Open frame + round terminal box (flange)

ADK21-32F/40F/50F-\* 3E  
3L

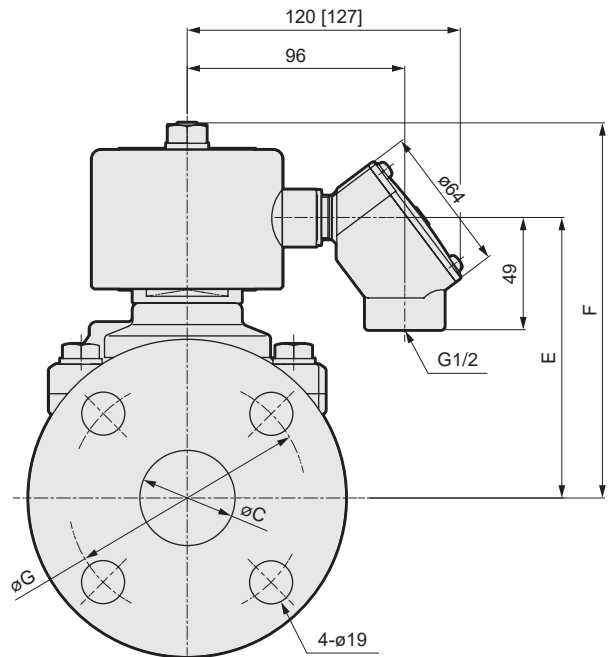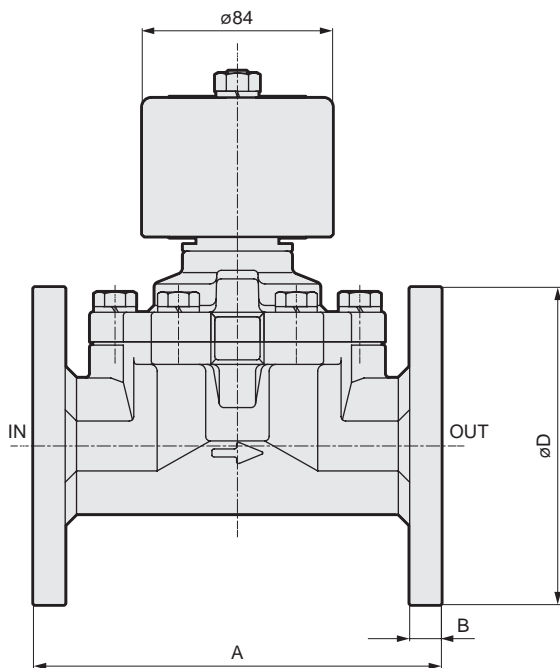

Model No.	A	B	C	D	E	F	G
ADK21-32F	170	12	35	135	116.5	158.5	100
ADK21-40F	180	14	42	140	123.5	165.5	105
ADK21-50F	180	14	52	155	132.5	174.5	120



● Conduit size  
Thin steel conduit thread  
JIS B 0204 CTC19

## Optional dimensions



- Open frame + round terminal box + cable gland


ADK21-32<sup>A</sup> to 50<sup>A</sup>-\* 

3E	D
3L	E
	F

Values in [ ] are for ADK21-32<sup>A</sup> to 50<sup>A</sup>-\* 

3L
----

 Type

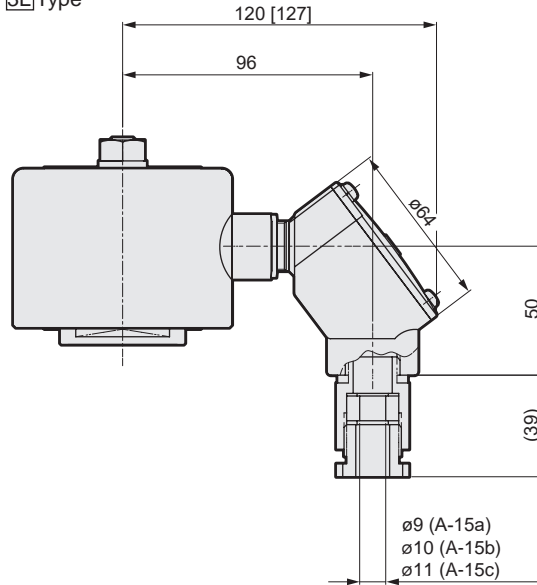

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Air operated 2-port ball valve  
(Compact rotary valves)

# CHB-W/CHB-WR\* Series

● Port size: Rc3/8 to Rc2



Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves


Pneumatic  
cylinders

Related  
products


Safety  
precautions

## JIS symbol


● CHB-W  
(double acting)



● CHB-WR1  
(Single acting-NC)



● CHB-WR2  
(Single acting-NO)



## Common specifications

Item	CHB-W	CHB-WR*	
Actuation	Air operated: Double acting	Air operated: Single acting	
Working fluid	Water/air/oil(500 mm <sup>2</sup> /s or less) (*1)		
Working pressure MPa	0 to 1.0		
Proof pressure(water pressure)MPa	2.0		
Fluid temperature °C	Water/oil: 0 to 80(no freezing) Air: -20 to 80 (no freezing) (*2)		
Ambient temperature°C	Fluoro rubber: -10 to 60, SpecialFluoro rubber: -20 to 60		
Working environment	Indoors/outdoors		
Valve seat leakage cm <sup>3</sup> /min	0 (at initial water pressure 1 MPa)		
Mounting orientation	Unrestricted		
Frequency cycles/min.	1 or less		
Rotary actuator	Pilot fluid	Compressed air	
	Lubrication	Not required(*3)	
	Proof pressure(water pressure) MPa	1.5	
	Working pressureMPa	0.35 to 0.7	0.4 to 0.7
	Fluid temperature°C	5 to 60	
Port size	Rc1/8	Rc1/8	

\*1: Dynamic viscosity varies with temperature. Check that the dynamic viscosity is 500mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 500 mm<sup>2</sup>/s, operation will become unstable.

\*2: When using fluid: air at -20 to 80°C, select the special fluoro rubber (F).

\*3: Use turbine oil ISO VG32 for lubrication. Consult with CKD regarding use in low-temperature environments.

## Individual specifications

Item	Model No.	Port size	Orifice size(mm)	Cv	WeightVolume(kg)	
					Double acting	Single acting
Standard bore	CHB-W(R*)-10	Rc3/8	10	10	1.0	1.1
	CHB-W(R*)-15	Rc1/2	10	6	1.0	1.1
	CHB-W(R*)-20	Rc3/4	15	16	1.2	1.3
	CHB-W(R*)-25	Rc1	20	29	1.3	2.2
	CHB-W(R*)-32	Rc1¼	25	50	2.3	2.8
	CHB-W(R*)-40	Rc1½	32	98	2.7	4.9
	CHB-W(R*)-50	Rc2	40	125	3.5	5.7

\*1: CHB-W (R\*)-10 is a full bore type.

### How to order

**CHB - W R1 - 15 - E**

Model No.

**A** Warranty period

**B** Actuator

**C** Port size

**D** Body/rubber material

Code	Description	
<b>A Warranty period</b>		
<b>W</b>	1 year after delivery	
<b>WG</b>	3 years after delivery <sup>*1*2</sup> (with inspection certificate, inspection guidelines, traceability system diagram)	
<b>B Actuator</b>		
<b>Blank</b>	Double acting	
<b>R1</b>	Single acting NC(Normally Closed)	
<b>R2</b>	Single acting NO(Normally Open)	
<b>C Port size</b>		
<b>10</b>	Rc3/8	
<b>15</b>	Rc1/2	
<b>20</b>	Rc3/4	
<b>25</b>	Rc1	
<b>32</b>	Rc1¼	
<b>40</b>	Rc1½	
<b>50</b>	Rc2	
<b>D Body/rubber material</b>		
	<b>Body</b>	<b>Rubber</b>
<b>E</b>	Stainless steel	Fluoro rubber <sup>*3</sup>
<b>F</b>		Special fluoro rubber <sup>*3</sup>

[Example of model No.]

### CHB-WR1-15-E

Model No. : CHB (standard bore)

**A** Warranty period : 1 year after delivery

**B** Actuator : Single acting NC(Normally Closed)

**C** Port size : Rc1/2

**D** Body material : Stainless steel

### ⚠ Precautions for model No. selection

\*1: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use, whichever comes first.

\*2: For option WG, the specifications and drawings must be agreed upon.

\*3: The ambient temperature of option E is -10°C to 60°C.

With option F, the ambient temperature is -20°C to 60°C.

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders


Related  
products

Safety  
precautions




## Dimensions: CHB-W Series

### ● CHB-W-10/15/20/25

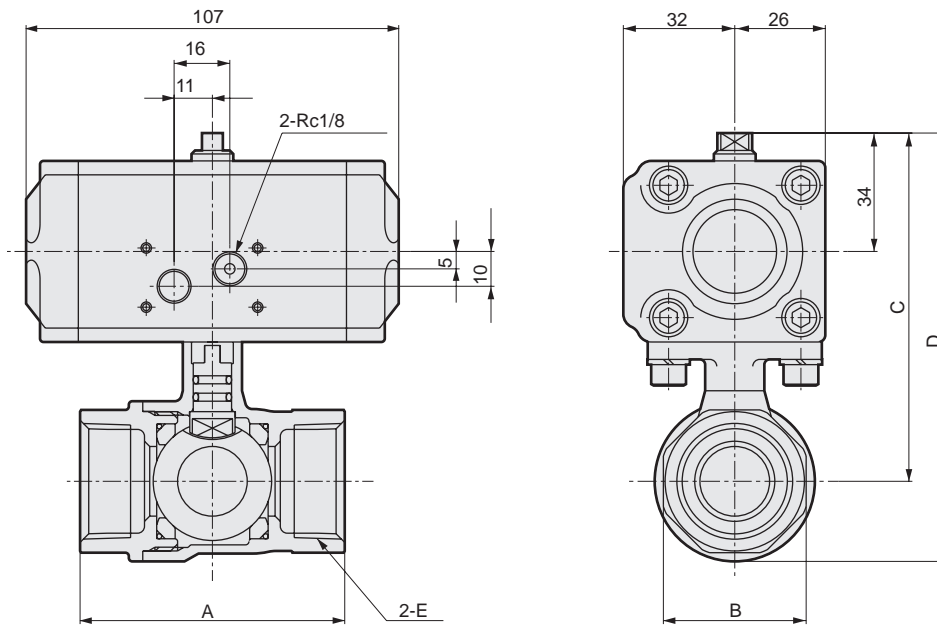

Model No.	A	B	C	D	E
CHB-W-10	56	28	91	107	Rc3/8
CHB-W-15	56	28	91	107	Rc1/2
CHB-W-20	65	34	97	117.5	Rc3/4
CHB-W-25	76	41	100	124	Rc1


### ● CHB-W-32/40/50

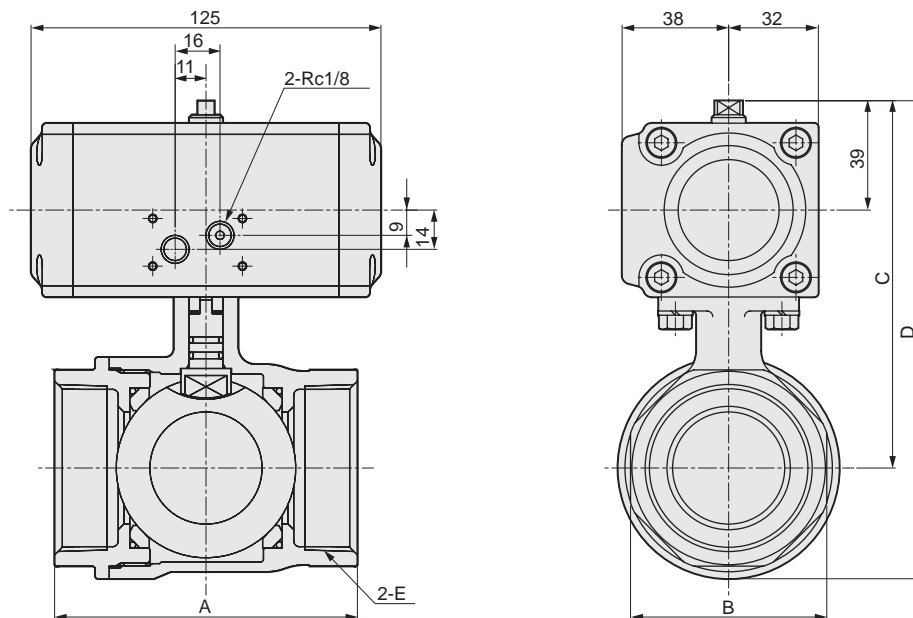

Model No.	A	B	C	D	E
CHB-W-32	84	50	116	145.5	Rc1¼
CHB-W-40	94	57	122	157.5	Rc1½
CHB-W-50	108	70	131	171.5	Rc2



## Dimensions: CHB-WR\* Series

### ● CHB-WR\*-10/15/20

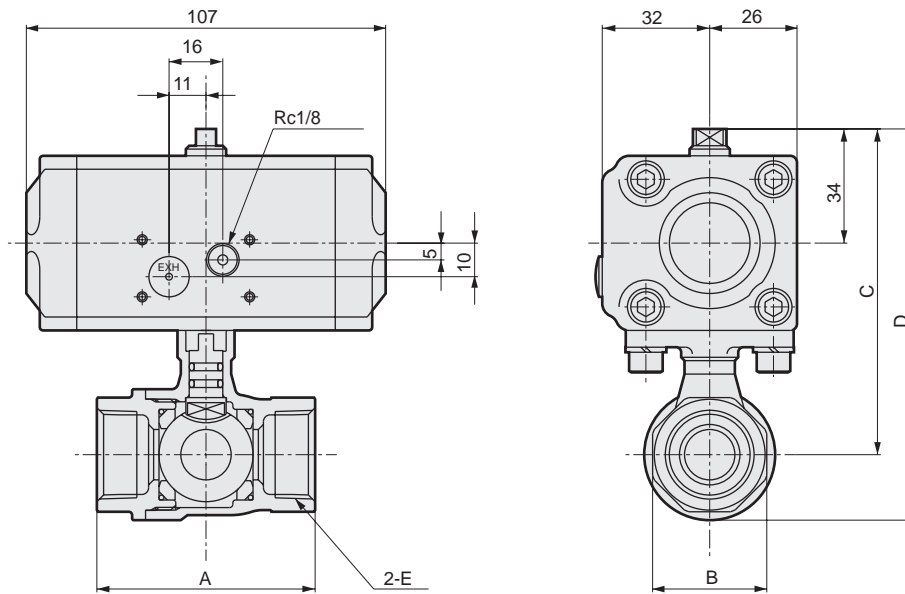

Model No.	A	B	C	D	E
CHB-WR*-10	56	28	91	107	Rc3/8
CHB-WR*-15	56	28	91	107	Rc1/2
CHB-WR*-20	65	34	97	117.5	Rc3/4

### ● CHB-WR\*-25/32/40/50

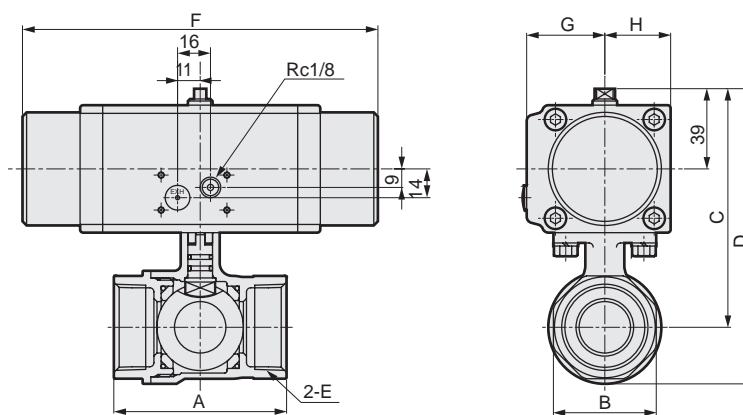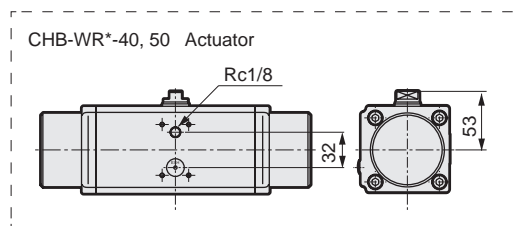

Model No.	A	B	C	D	E	F	G	H
CHB-WR*-25	76	41	110	134	Rc1	173	38	32
CHB-WR*-32	84	50	116	145.5	Rc1 <sup>1</sup> / <sub>4</sub>	173	38	32
CHB-WR*-40	94	57	156.5	192	Rc1 <sup>1</sup> / <sub>2</sub>	244	43	38
CHB-WR*-50	108	70	165.5	206	Rc2	244	43	38

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Air operated 3-port ball valve  
(Compact rotary valves)

# CHG-W/CHG-WR\* Series


● Port size: Rc1/2 to Rc2




Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

## JIS symbol


● CHG-W(Double acting)



● CHG-WR1(Single acting - normally B-C path)



● CHG-WR2(Single acting - normally A-C path)



## Common specifications

Item	CHG-W	CHG-WR*
Actuation	Air operated: Double acting	Air operated: Single acting
Working fluid	Water/air/oil(500 mm <sup>2</sup> /s or less) (*1)	
Working pressure MPa	0 to 1.0	
Proof pressure(water pressure) MPa	2.0	
Fluid temperature °C	Water/oil: 0 to 80(no freezing) Air: -20 to 80 (no freezing) (*2)	
Ambient temperature °C	Fluoro rubber (E):-10 to 60, special fluoro rubber (F):-20 to 60	
Working environment	Indoors/outdoors	
Valve seat leakage cm <sup>3</sup> /min	0 (at initial water pressure 1 MPa)	
Mounting orientation	Unrestricted	
Frequency cycles/min.	1 or less	
Pressurization direction	Port C pressurization only	
Flow path shape	Multi-fluid type(90°Rotation switching method)	
Rotary actuator	Pilot fluid	Compressed air
	Lubrication	Not required(*3)
	Proof pressure(water pressure) MPa	1.5
	Working pressure MPa	0.35 to 0.7
	Fluid temperature °C	5 to 60
Port size	Rc1/8	Rc1/8

\*1: Dynamic viscosity varies with temperature. Check that the dynamic viscosity is 500mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 500 mm<sup>2</sup>/s, operation will become unstable.

\*2: When using fluid: air at -20 to 80°C, select the special fluoro rubber (F).

\*3: Use turbine oil ISO VG32 for lubrication. Consult with CKD regarding use in low-temperature environments.

## Individual specifications

Item Model No.	Port size	Orifice size(mm)	Cv	Weight(kg)	
				Double acting	Single acting
CHG-W(R*)-15	Rc1/2	10	3	1.1	1.2
CHG-W(R*)-20	Rc3/4	14	6	1.3	1.4
CHG-W(R*)-25	Rc1	19	11	1.5	2.4
CHG-W(R*)-32	Rc1 <sup>1</sup> / <sub>4</sub>	23	16	2.3	2.8
CHG-W(R*)-40	Rc1 <sup>1</sup> / <sub>2</sub>	30	28	2.8	5.0
CHG-W(R*)-50	Rc2	38	47	3.7	5.9

### How to order

**CHG - W R1 - 20 - E**

Model No.

**A** Warranty period

**B** Actuator

**C** Port size

**D** Body/rubber material

Code	Description	
<b>A Warranty period</b>		
<b>W</b>	1 year after delivery	
<b>WG</b>	3 years after delivery <sup>*1*2</sup> (with inspection certificate, inspection guidelines, traceability system diagram)	
<b>B Actuator</b>		
<b>Blank</b>	Double acting	
<b>R1</b>	Single acting, normally B-C path	
<b>R2</b>	Single acting, normally A-C path	
<b>C Port size</b>		
<b>15</b>	Rc1/2	
<b>20</b>	Rc3/4	
<b>25</b>	Rc1	
<b>32</b>	Rc1 <sup>1</sup> / <sub>4</sub>	
<b>40</b>	Rc1 <sup>1</sup> / <sub>2</sub>	
<b>50</b>	Rc2	
<b>D Body/rubber material</b>		
	<b>Body</b>	<b>Rubber</b>
<b>E</b>	Stainless steel	Fluoro rubber <sup>*3</sup>
<b>F</b>		Special fluoro rubber <sup>*3</sup>

[Example of model No.]

**CHG-WR1-20-E**

Model: CHG

- A** Warranty period : 1 year after delivery
- B** Actuator : Single acting, normally B-C path
- C** Port size : Rc3/4
- D** Body material : Stainless steel

### Precautions for model No. selection

\*1: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use, whichever comes first.

\*2: For option WG, the specifications and drawings must be agreed upon.

\*3: The ambient temperature of option E is -10°C to 60°C.

With option F, the ambient temperature is -20°C to 60°C.

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves


Pneumatic  
cylinders

Related  
products

Safety  
precautions


## Dimensions: CHG-W Series

### ● CHG-W-15/20/25

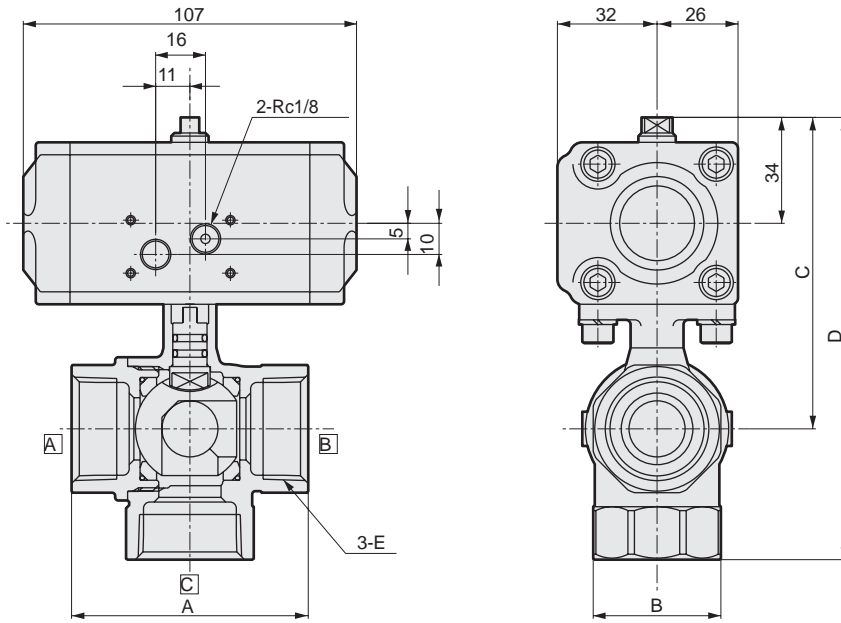

Model No.	A	B	C	D	E
CHG-W-15	56	28	91	121	Rc1/2
CHG-W-20	65	34	97	133	Rc3/4
CHG-W-25	76	41	100	142	Rc1


### ● CHG-W-32/40/50

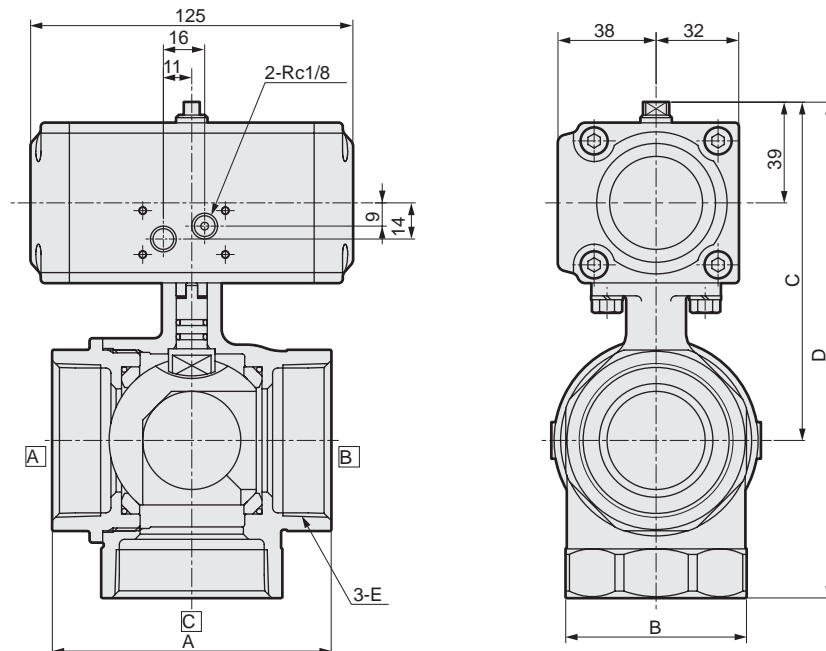

Model No.	A	B	C	D	E
CHG-W-32	84	50	116	163	Rc1 <sup>1</sup> / <sub>4</sub>
CHG-W-40	94	57	122	175	Rc1 <sup>1</sup> / <sub>2</sub>
CHG-W-50	108	70	131	192	Rc2


## Dimensions: CHG-WR\* Series

● CHG-WR\*-15/20

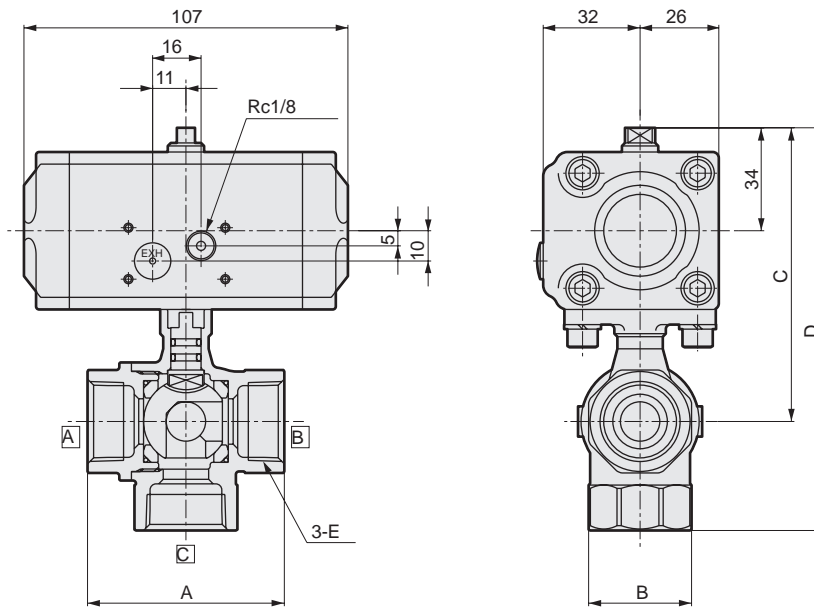



Model No.	A	B	C	D	E
CHG-WR*-15	56	28	91	121	Rc1/2
CHG-WR*-20	65	34	97	133	Rc3/4

● CHG-WR\*-25/32/40/50

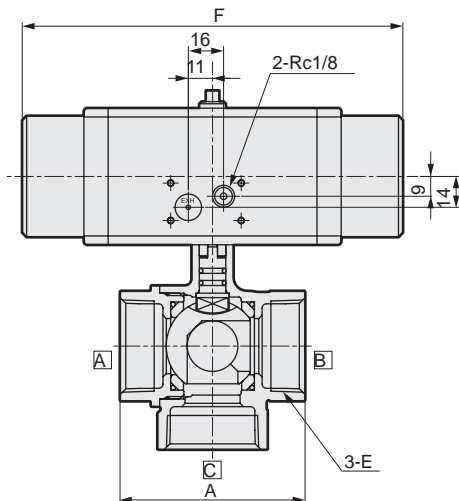


Model No.	A	B	C	D	E	F	G	H
CHG-WR*-25	76	41	110	152	Rc1	173	38	32
CHG-WR*-32	84	50	116	163	Rc1 <sup>1</sup> / <sub>4</sub>	173	38	32
CHG-WR*-40	94	57	156.5	209.5	Rc1 <sup>1</sup> / <sub>2</sub>	244	43	38
CHG-WR*-50	108	70	165.5	226.5	Rc2	244	43	38

● CHG-WR\*-40, 50 Actuator

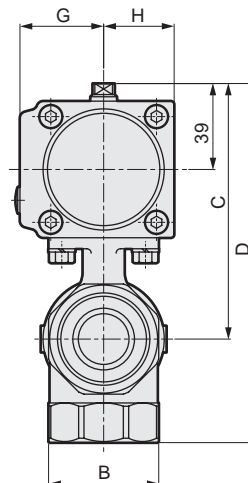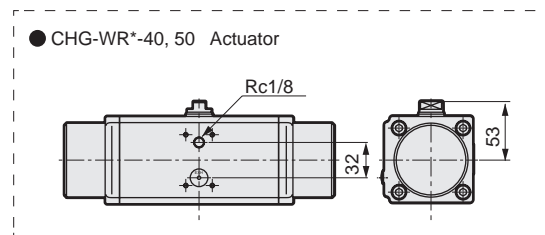

Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions



Air operated ball type 2-port solenoid valve  
(Compact rotary valves)

# CHB-WV1/CHB-WX1 Series


● Port size: Rc3/8 to Rc2




Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

## JIS symbol

● CHB-WV1  
(Double acting-NC)



● CHB-WX1  
(Single acting-NC)



## Common specifications

Item	CHB-WV1	CHB-WX1	
Actuation	With solenoid valve: Double acting	With solenoid valve: Single acting	
Working fluid	Water/air/oil(500 mm <sup>2</sup> /s or less) (*1)		
Working pressure MPa	0 to 1.0		
Proof pressure(water pressure) MPa	2.0		
Fluid temperature °C	Water/oil: 0 to 80(no freezing) Air: -20 to 80 (no freezing) (*2)		
Ambient temperature°C	Fluoro rubber (E): -10 to 60, special fluoro rubber (F): -20 to 60		
Working environment	Indoors/outdoors		
Valve seat leakagecm <sup>3</sup> /min	0 (at initial water pressure 1 MPa)		
Mounting orientation	Vertical direction with the actuator on the top		
Frequency cycles/min.	1 or less		
Rotary actuator	Pilot fluid	Compressed air	
	Lubrication	Not required(*3)	
	Proof pressure(water pressure)MPa	1.5	
	Working pressureMPa	0.35 to 0.7	0.4 to 0.7
Fluid temperature°C	5 to 60		
Port size	Ports S, E1, E2	Rc1/4	
	EXH port	Rc1/8	

## Electrical specifications

Rated voltage	100 VAC(50/60Hz), 200 VAC(50/60Hz), 24 VDC	
Starting current(A)	100 VAC	0.170/0.140(50/60Hz)
	200 VAC	0.090/0.070(50/60Hz)
	24 VDC	0.250
Holding current(A)	100 VAC	0.100/0.080(50/60Hz)
	200 VAC	0.050/0.040(50/60Hz)
	24 VDC	0.250
Power consumption(W)	100 VAC	5.0/4.0(50/60Hz)
	200 VAC	5.0/4.0(50/60Hz)
	24 VDC	6.0
Thermal class	Class 130(B)	
Degree of protection	IP65	
Voltage fluctuation range	±10%	

\*1: Dynamic viscosity varies with temperature. Check that the dynamic viscosity is 500mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 500 mm<sup>2</sup>/s, operation will become unstable.

\*2: When using fluid: air at -20 to 80°C, select the special fluoro rubber (F).

\*3: Use turbine oil ISO VG32 for lubrication. Consult with CKD regarding use in low-temperature environments.

## Individual specifications

Item	Model No.	Port size	Orifice size(mm)	Cv	Weight (kg)	
					Double acting	Single acting
Standard bore	CHB-WV1/WX1-10-	Rc3/8	10	10	2.1	2.2
	CHB-WV1/WX1-15-	Rc1/2	10	6	2.1	2.2
	CHB-WV1/WX1-20-	Rc3/4	15	16	2.3	2.4
	CHB-WV1/WX1-25-	Rc1	20	29	2.4	3.3
	CHB-WV1/WX1-32-	Rc1 <sup>1</sup> / <sub>4</sub>	25	50	3.4	3.9
	CHB-WV1/WX1-40-	Rc1 <sup>1</sup> / <sub>2</sub>	32	98	3.8	6.0
	CHB-WV1/WX1-50-	Rc2	40	125	4.6	6.8



### How to order

**CHB - W V1 - 25 - E B - S - AC100V**

Model No.

**A** Warranty period

**B** Actuator

**C** Port size

**D** Body/rubber material

**E** Coil option

**F** Other options

**G** Voltage

Code	Description
<b>A Warranty period</b>	
<b>W</b>	1 year after delivery
<b>WG</b>	3 years after delivery <sup>*1*2</sup> (with inspection certificate, inspection guidelines, traceability system diagram)
<b>B Actuator</b>	
<b>V1</b>	Double acting NC(Open when energized)
<b>X1</b>	Single acting NC(Open when energized)
<b>C Port size</b>	
<b>10</b>	Rc3/8
<b>15</b>	Rc1/2
<b>20</b>	Rc3/4
<b>25</b>	Rc1
<b>32</b>	Rc1 <sup>1</sup> / <sub>4</sub>
<b>40</b>	Rc1 <sup>1</sup> / <sub>2</sub>
<b>50</b>	Rc2
<b>D Body/rubber material</b>	
	<b>Body</b> <b>Rubber</b>
<b>E</b>	Stainless steel              Fluoro rubber <sup>*3</sup>
<b>F</b>	Stainless steel              Special fluoro rubber <sup>*3</sup>
<b>E Coil option</b>	
<b>B</b>	Round terminal box (G <sup>1</sup> / <sub>2</sub> )
<b>BL</b>	Round terminal box with lamp (G <sup>1</sup> / <sub>2</sub> )
<b>F Other options</b>	
<b>Blank</b>	None
<b>S</b>	Silencer <sup>*4</sup>
<b>G Voltage</b>	
<b>AC100V</b>	100 VAC 50/60 Hz, 110 VAC 60 Hz
<b>AC200V</b>	200 VAC 50/60 Hz and 220 VAC 60 Hz
<b>DC24V</b>	24 VDC

[Example of model No.]

**CHB-WV1-25-EB-S-AC100V**

Model No. : CHB (standard bore)  
**A** Warranty period : 1 year after delivery  
**B** Actuator : Double acting NC(Open when energized)  
**C** Port size : Rc1  
**D** Body material : Stainless steel  
**E** Coil option : With round terminal box  
**F** Other options : With 2 silencers  
**G** Voltage : 100 VAC 50/60Hz.110 VAC 60Hz

### ⚠ Precautions for model No. selection

- \*1: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use, whichever comes first.
- \*2: For option WG, the specifications and drawings must be agreed upon.
- \*3: The ambient temperature of option E is -10°C to 60°C. With option F, the ambient temperature is -20°C to 60°C.
- \*4: Two CKD SL-8A-W are included with **B** WV1, and one is included with **B** WX1.

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders


Related  
products

Safety  
precautions

# CHB-WV1 Series


## Dimensions CHB-WV1 Series

### ● CHB-WV1-10/15/20/25

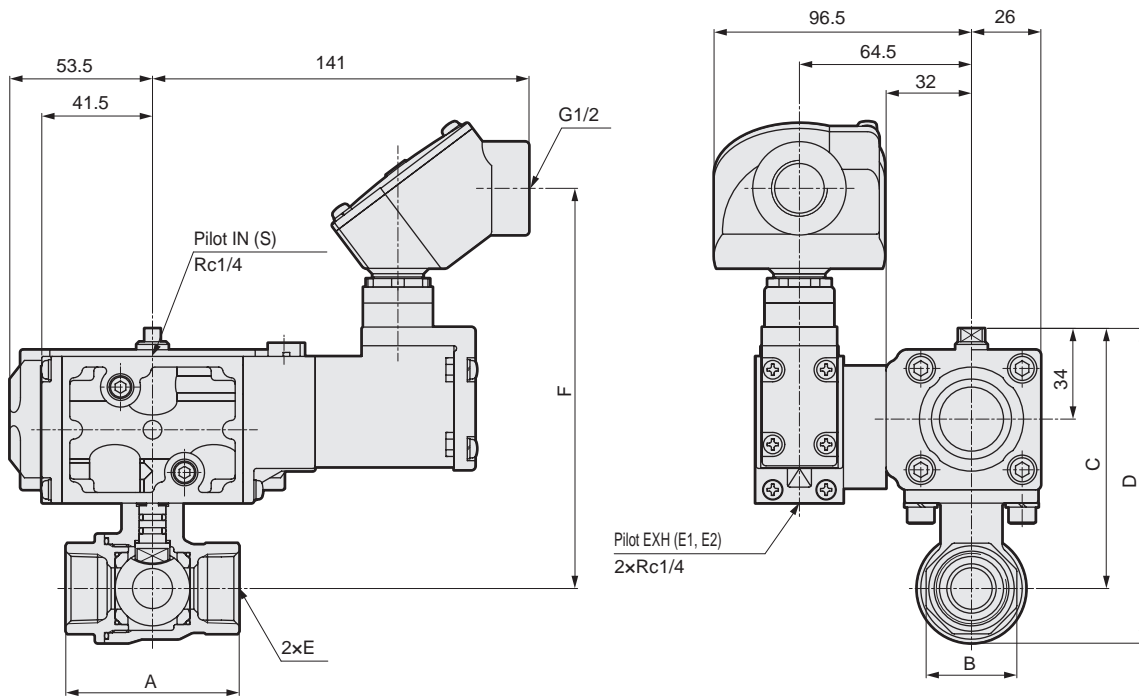

Model No.	A	B	C	D	E	F
CHB-WV1-10	56	28	91	107	Rc3/8	144
CHB-WV1-15	56	28	91	107	Rc1/2	144
CHB-WV1-20	65	34	97	117.5	Rc3/4	150
CHB-WV1-25	76	41	100	124	Rc1	153


### ● CHB-WV1-32/40/50

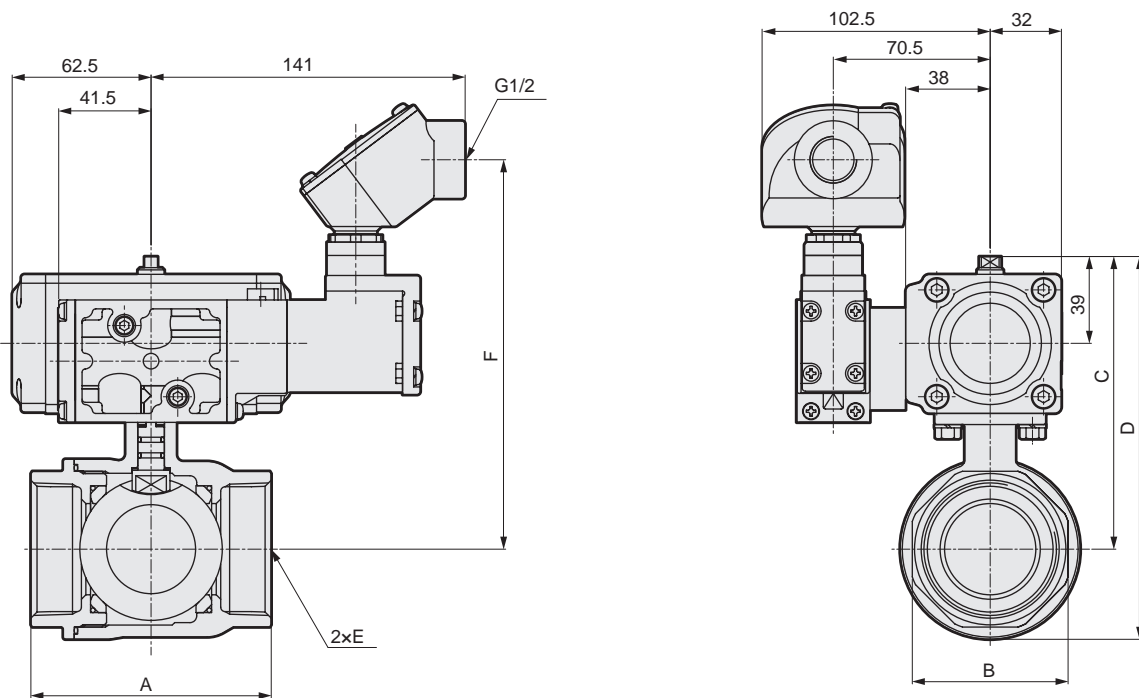

Model No.	A	B	C	D	E	F
CHB-WV1-32	84	50	116	145.5	Rc11/4	160
CHB-WV1-40	94	57	122	157.5	Rc11/2	166
CHB-WV1-50	108	70	131	171.5	Rc2	175


## Dimensions CHB-WX1 Series

### ● CHB-WX1-10/15/20

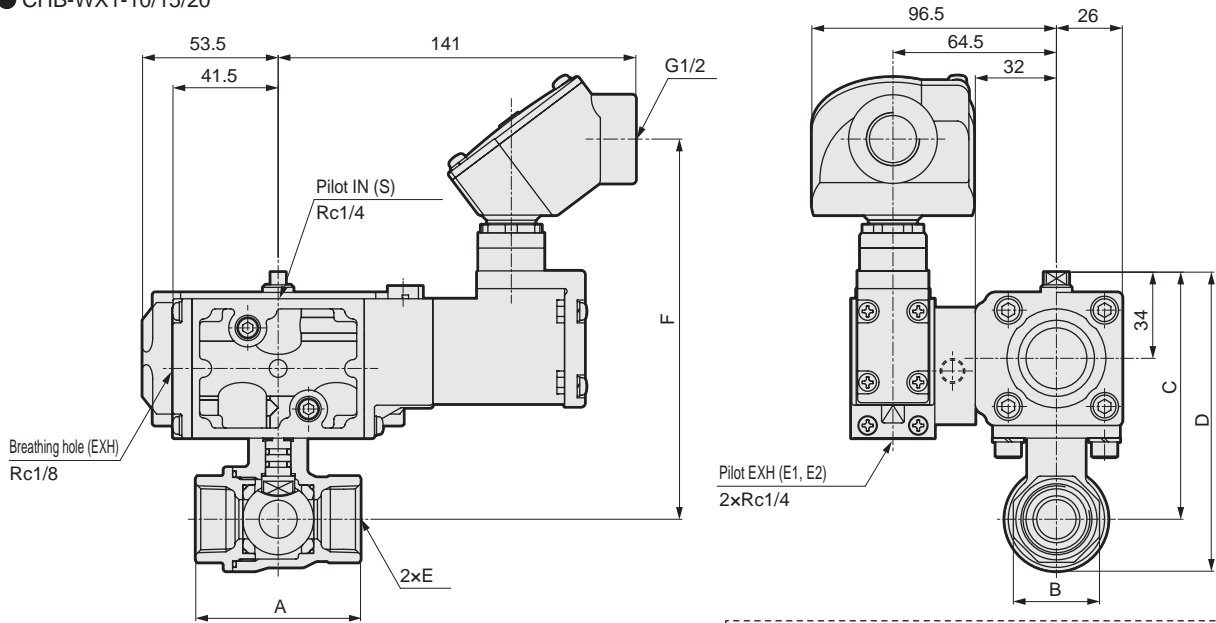


Model No.	A	B	C	D	E	F
CHB-WX1-10	56	28	91	107	Rc3/8	144
CHB-WX1-15	56	28	91	107	Rc1/2	144
CHB-WX1-20	65	34	97	117.5	Rc3/4	150


### ● CHB-WX1-25/32/40/50

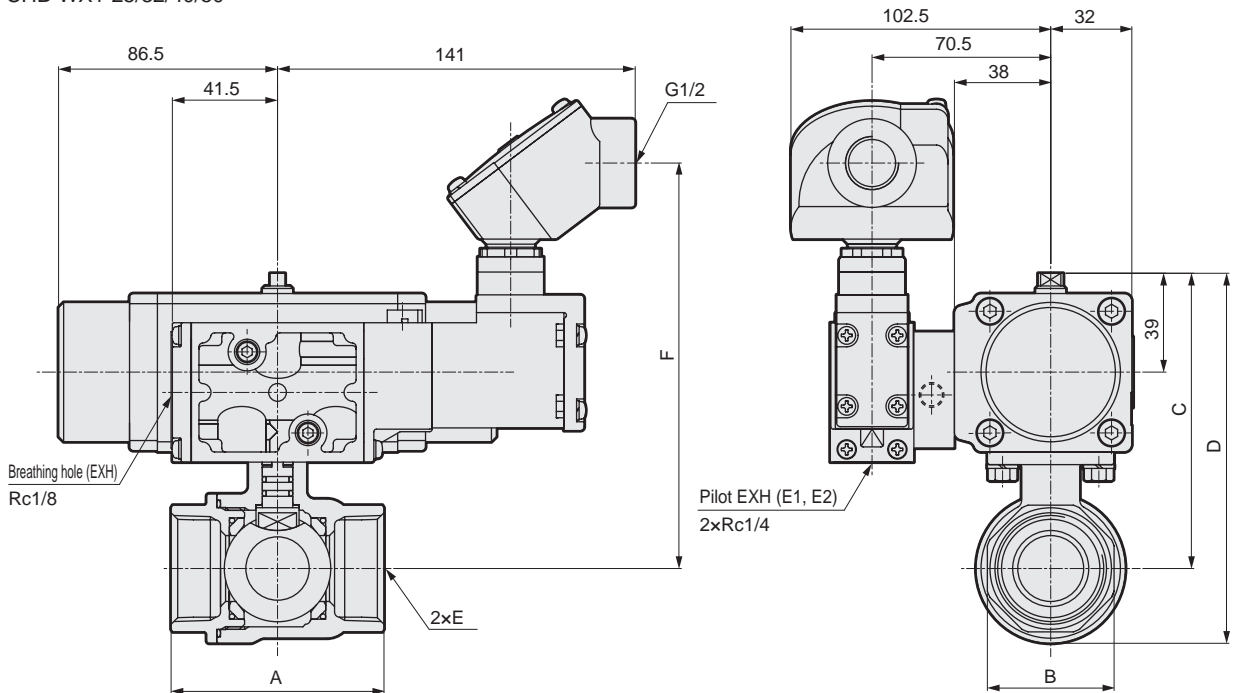

Model No.	A	B	C	D	E	F
CHB-WX1-25	76	41	110	134	Rc1	153
CHB-WX1-32	84	50	116	145.5	Rc11/4	160
CHB-WX1-40	94	57	156.5	192	Rc11/2	194
CHB-WX1-50	108	70	165.5	206	Rc2	203

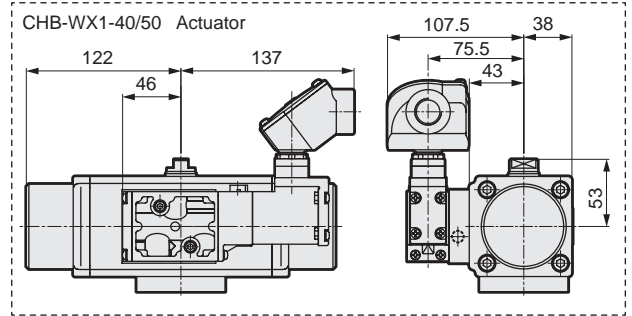

Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions



Air operated ball type 3-port solenoid valve  
(Compact rotary valves)

# CHG-WV1/CHG-WX1 Series


● Port size: Rc1/2 to Rc2




Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

## JIS symbol

● CHG-WV1(Double acting - normally B-C flowRoad)



● CHG-WX1(Single acting - normally B-C flowRoad)



## Common specifications

Item	CHG-WV1	CHG-WX1	
Actuation	With solenoid valve: Double acting	With solenoid valve: Single acting	
Working fluid	Water/air/oil(500 mm <sup>2</sup> /s or less) (*1)		
Working pressure MPa	0 to 1.0		
Proof pressure(water pressure) MPa	2.0		
Fluid temperature °C	Water/oil: 0 to 80(no freezing) Air: -20 to 80 (no freezing) (*2)		
Ambient temperature °C	Fluoro rubber (E): -10 to 60, special fluoro rubber (F): -20 to 60		
Working environment	Indoors/outdoors		
Valve seat leakage cm <sup>3</sup> /min	0 (at initial water pressure 1 MPa)		
Mounting orientation	Vertical direction with the actuator on the top		
Frequency cycles/min.	1 or less		
Pressurization direction	Port C pressurization only		
Flow path shape	Multi-fluid type(90°Rotation switching method)		
Rotary actuator	Pilot fluid	Compressed air	
	Lubrication	Not required(*3)	
	Proof pressure(water pressure) MPa	1.5	
	Working pressure MPa	0.35 to 0.7	0.4 to 0.7
	Fluid temperature °C	5 to 60	
Port size	Ports S, E1, E2	Rc1/4	
	EXH port	Rc1/8	

## Electrical specifications

Rated voltage	100 VAC(50/60Hz), 200 VAC(50/60Hz), 24 VDC	
Starting current(A)	100 VAC	0.170/0.140(50/60Hz)
	200 VAC	0.090/0.070(50/60Hz)
	24 VDC	0.250
Holding current(A)	100 VAC	0.100/0.080(50/60Hz)
	200 VAC	0.050/0.040(50/60Hz)
	24 VDC	0.250
Power consumption(W)	100 VAC	5.0/4.0(50/60Hz)
	200 VAC	5.0/4.0(50/60Hz)
	24 VDC	6.0
Thermal class	Class 130(B)	
Degree of protection	IP65	
Voltage fluctuation range	±10%	

\*1: Dynamic viscosity varies with temperature. Check that the dynamic viscosity is 500mm<sup>2</sup>/s or less within the temperature range being used. When exceeding 500 mm<sup>2</sup>/s, operation will become unstable.


\*2: When using fluid: air at -20 to 80°C, select the special fluoro rubber (F).

\*3: Use turbine oil ISO VG32 for lubrication. Consult with CKD regarding use in low-temperature environments.

## Individual specifications

Item Model No.	Port size	Orifice size(mm)	Cv	Weight (kg)	
				Double acting	Single acting
CHG-WV1/WX1-15-	Rc1/2	10	3	2.2	2.3
CHG-WV1/WX1-20-	Rc3/4	14	6	2.4	2.5
CHG-WV1/WX1-25-	Rc1	19	11	2.6	3.5
CHG-WV1/WX1-32-	Rc1 1/4	23	16	3.4	3.9
CHG-WV1/WX1-40-	Rc1 1/2	30	28	3.9	6.1
CHG-WV1/WX1-50-	Rc2	38	47	4.8	7.0

### How to order

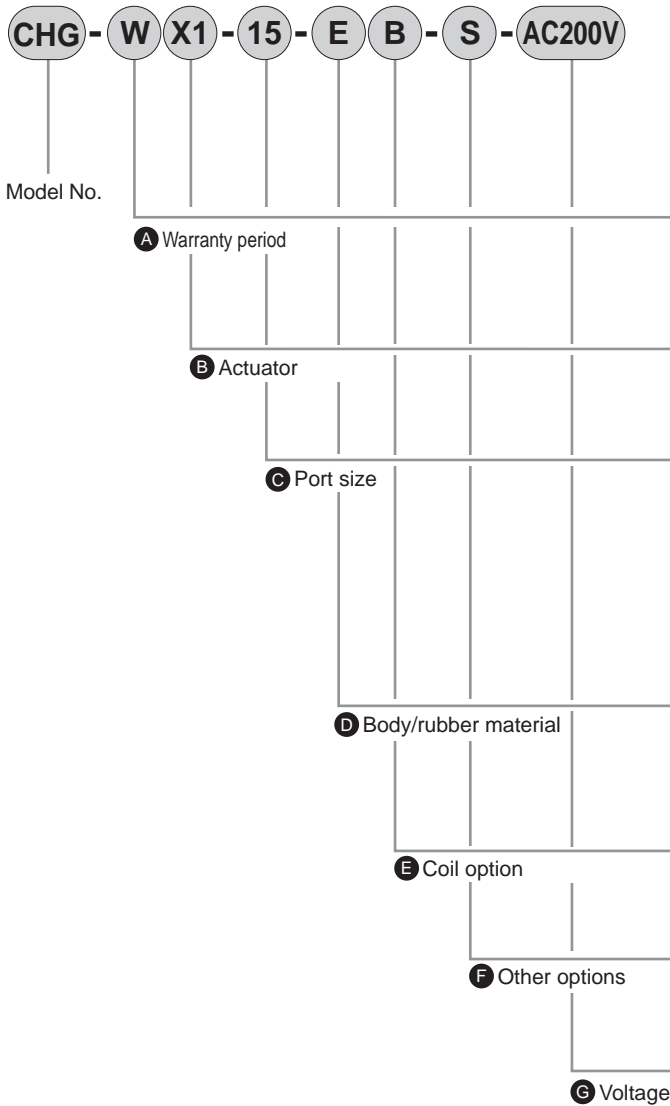

Code	Description	
<b>A Warranty period</b>		
<b>W</b>	1 year after delivery	
<b>WG</b>	3 years after delivery (with inspection certificate, inspection guidelines, traceability system diagram) *1*2	
<b>B Actuator</b>		
<b>V1</b>	Double acting, normally B-C path	
<b>X1</b>	Single acting, normally B-C path	
<b>C Port size</b>		
<b>15</b>	Rc1/2	
<b>20</b>	Rc3/4	
<b>25</b>	Rc1	
<b>32</b>	Rc1 <sup>1</sup> / <sub>4</sub>	
<b>40</b>	Rc1 <sup>1</sup> / <sub>2</sub>	
<b>50</b>	Rc2	
<b>D Body/rubber material</b>		
	<b>Body</b>	<b>Rubber</b>
<b>E</b>	Stainless steel	Fluoro rubber *3
<b>F</b>		Special fluoro rubber *3
<b>E Coil option</b>		
<b>B</b>	Round terminal box (G <sup>1</sup> / <sub>2</sub> )	
<b>BL</b>	Round terminal box with lamp (G <sup>1</sup> / <sub>2</sub> )	
<b>F Other options</b>		
<b>Blank</b>	None	
<b>S</b>	Silencer *4	
<b>G Voltage</b>		
<b>AC100V</b>	100 VAC 50/60 Hz, 110 VAC 60 Hz	
<b>AC200V</b>	200 VAC 50/60 Hz and 220 VAC 60 Hz	
<b>DC24V</b>	24 VDC	

[Example of model No.]

### CHG-WX1-15-EB-S-AC200V

Model: CHG

- A** Warranty period : 1 year after delivery
- B** Actuator : Single acting, normally B-C path
- C** Port size : Rc1/2
- D** Body material : Stainless steel
- E** Coil option : With round terminal box
- F** Other options : With 1 silencer
- G** Voltage : 200 VAC 50/60Hz. 220 VAC 60Hz

### ⚠ Precautions for model No. selection


- \*1: The warranty period of option WG is 3 years from the date of delivery or 1 year from initial use, whichever comes first.
- \*2: For option WG, the specifications and drawings must be agreed upon.
- \*3: The ambient temperature of option E is -10°C to 60°C. With option F, the ambient temperature is -20°C to 60°C.
- \*4: Two CKD SL-8A-W are included with **B** WV1, and one is included with **B** WX1.

Drain separator  
 F.R.L. unit  
 Pneumatic auxiliary  
 components  
 Pneumatic  
 valves  
 Fluid control  
 valves  
 Pneumatic  
 cylinders  
 Related  
 products  
 Safety  
 precautions

# CHG-WV1 Series


## Dimensions: CHG-WV1 Series

### ● CHG-WV1-15/20/25

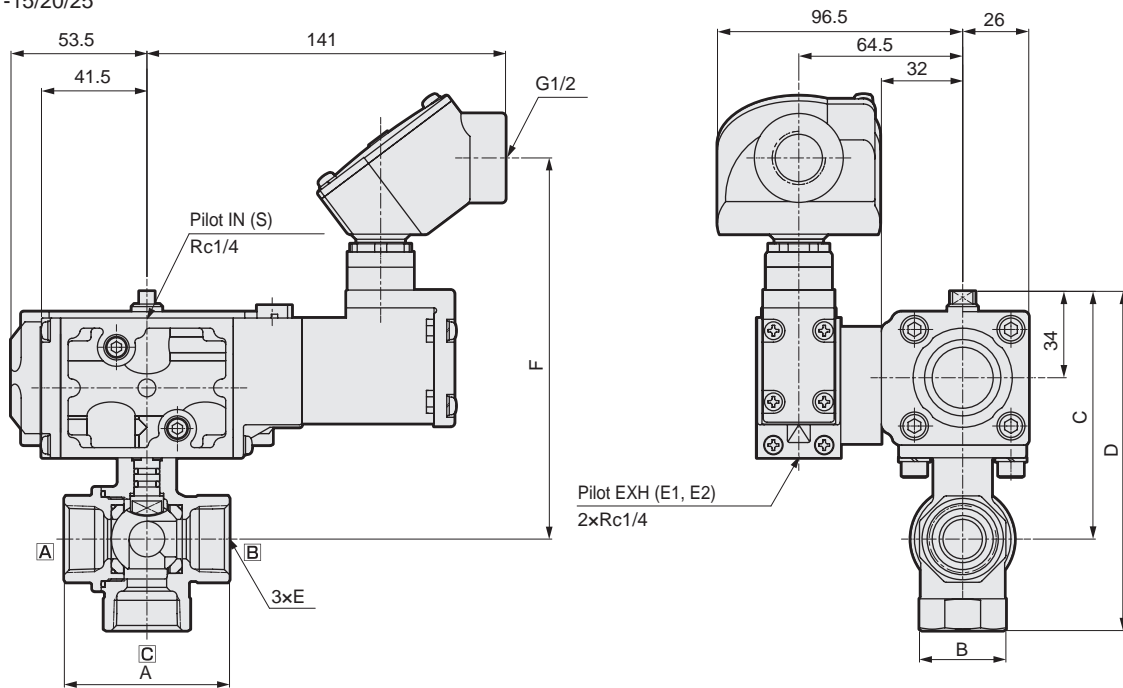

Model No.	A	B	C	D	E	F
CHG-WV1-15	56	28	91	121	Rc1/2	144
CHG-WV1-20	65	34	97	133	Rc3/4	150
CHG-WV1-25	76	41	100	142	Rc1	153

### ● CHG-WV1-32/40/50


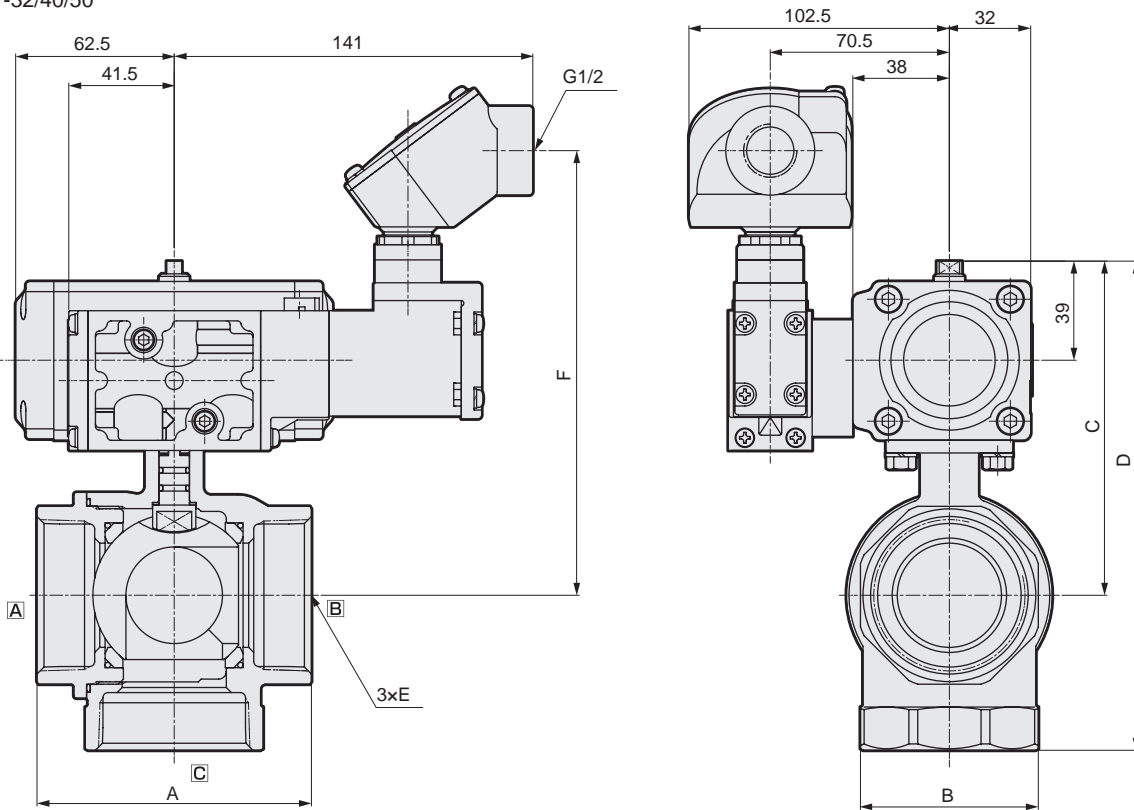


Model No.	A	B	C	D	E	F
CHG-WV1-32	84	50	116	163	Rc1 1/4	160
CHG-WV1-40	94	57	122	175	Rc1 1/2	166
CHG-WV1-50	108	70	131	192	Rc2	175


Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

## Dimensions CHG-WX1 Series



### ● CHG-WX1-15/20

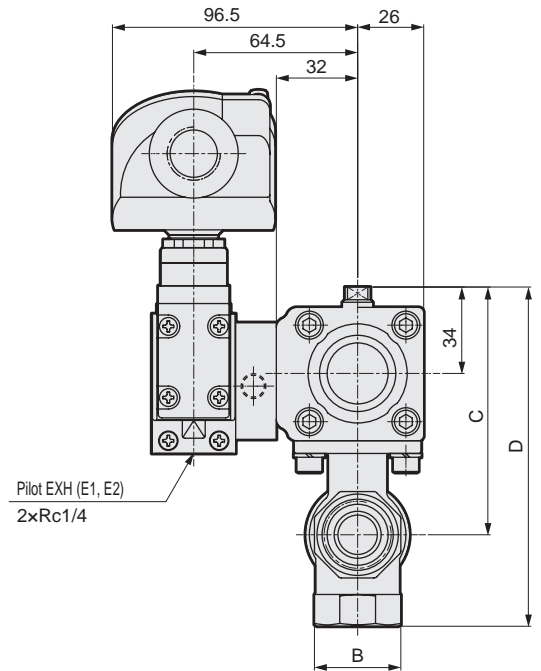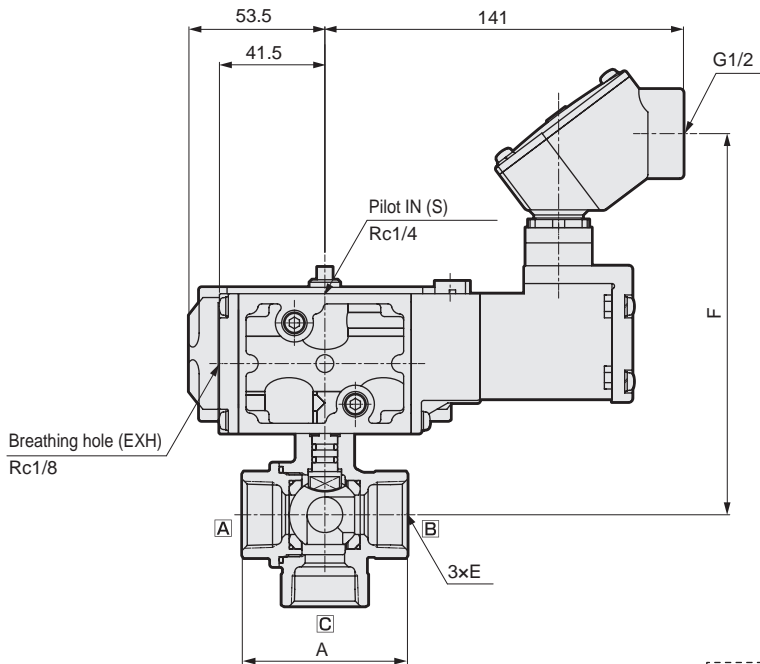

Model No.	A	B	C	D	E	F
CHG-WX1-15	56	28	91	121	Rc1/2	144
CHG-WX1-20	65	34	97	133	Rc3/4	150

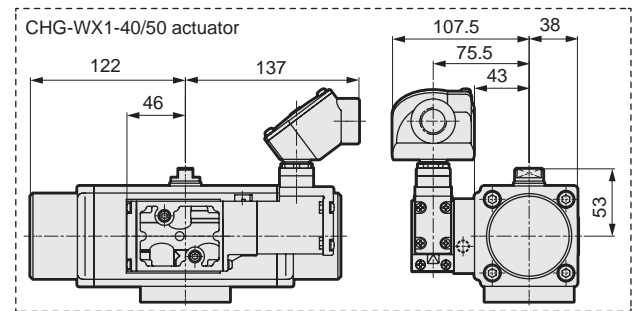


### ● CHG-WX1-25/32/40/50

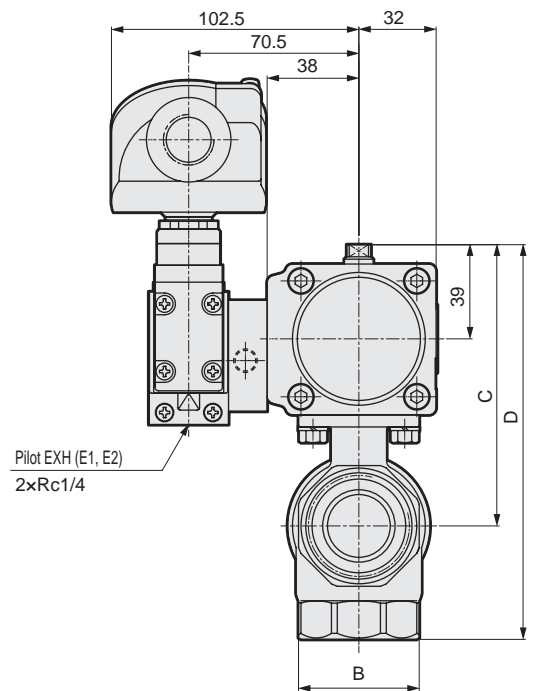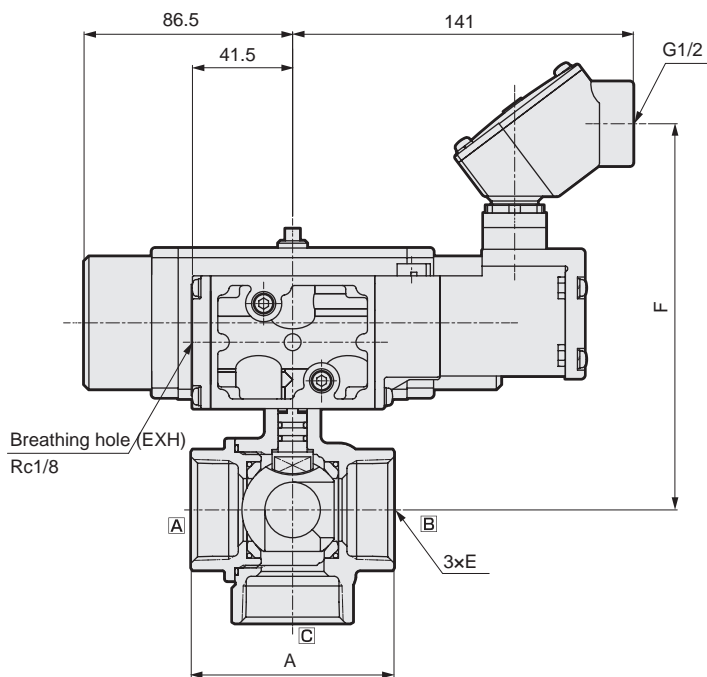

Model No.	A	B	C	D	E	F
CHG-WX1-25	76	41	110	152	Rc1	153
CHG-WX1-32	84	50	116	163	Rc1 1/4	160
CHG-WX1-40	94	57	156.5	209.5	Rc1 1/2	194
CHG-WX1-50	108	70	165.5	226.5	Rc2	203

Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions





Air operated 2-port ball valve  
(Compact rotary valves)

# CSB-W/CSB-WR\* Series

● Port size: Rc3/8 to Rc2




Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

## JIS symbol


● CSB-W

(Double acting)




● CSB-WR1

(Single acting-NC)



● CSB-WR2

(Single acting-NO)



## Common specifications

Item	CSB-W	CSB-WR*
Actuation	Air operated: Double acting	Air operated: Single acting
Working fluid	Steam/hot water	
Working pressure MPa	0 to 0.6	
Proof pressure(water pressure) MPa	2.0	
Fluid temperature °C	0 to 164(no freezing)	
Ambient temperature°C	-10 to 60	
Working environment	Indoors/outdoors	
Valve seat leakagecm <sup>3</sup> /min	1 or less (at initial water pressure 0.6 MPa)	
Mounting orientation	Unrestricted	
Frequency cycles/min.	1 or less	
Rotary actuator	Pilot fluid	Compressed air
	Lubrication	Not required(Use turbine oil class 1 ISO VG32 if necessary for lubrication.)
	Proof pressure(water pressure) MPa	1.5
	Working pressureMPa	0.35 to 0.7
	Fluid temperature °C	5 to 60
Port size	Rc1/8	

## Individual specifications

Item	Model No.	Port size	Orifice size(mm)	Cv	WeightVolume(kg)	
					Double acting	Single acting
Standard bore	CSB-W(R*)-10	Rc3/8	10	10	1.0	1.1
	CSB-W(R*)-15	Rc1/2	10	6	1.0	1.1
	CSB-W(R*)-20	Rc3/4	15	16	1.2	1.3
	CSB-W(R*)-25	Rc 1	20	29	1.3	2.2
	CSB-W(R*)-32	Rc1 <sup>1</sup> / <sub>4</sub>	25	50	2.3	2.8
	CSB-W-40	Rc1 <sup>1</sup> / <sub>2</sub>	32	98	2.7	-
	CSB-W-50	Rc 2	40	125	3.5	-

\*1: CSB-(WR\*)-10 is a full bore type.

\*2: CSB (- WR \*) -40/50 is not supported.

### How to order

**CSB - W R1 - 15 - W**

Model No.

**A** Warranty period

**B** Actuator

**C** Port size  
\*3

**D** Body/seal material

Code	Description
<b>A Warranty period</b>	
<b>W</b>	1 year after delivery
<b>WG</b>	3 years after delivery *1*2 (with inspection certificate, inspection guidelines, traceability system diagram)
<b>B Actuator</b>	
<b>Blank</b>	Double acting
<b>R1</b>	Single acting NC (normally closed)
<b>R2</b>	Single acting NO (normally open)
<b>C Port size</b>	
<b>10</b>	Rc 3/8
<b>15</b>	Rc 1/2
<b>20</b>	Rc 3/4
<b>25</b>	Rc 1
<b>32</b>	Rc 1 1/4
<b>40</b>	Rc 1 1/2
<b>50</b>	Rc 2
<b>D Body/seal material</b>	
<b>W</b>	Stainless steel - reinforced PTFE *3

Example of model No.]

### CSB-WR1-15-W

Model: CSB (standard bore)

- A** Warranty period : 1 year after delivery
- B** Actuator : Single acting NC (normally closed)
- C** Port size : Rc 1/2
- D** Body/seal material : stainless steel - reinforced PTFE

### Precautions for model No. selection

\*1: The warranty period of option WG is three years from the date of delivery or one year from initial use, whichever comes first.

\*2: For option WG, the specifications and drawings must be agreed upon.

\*3: CSB-WR\*-40/50 is not supported.

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders



Related  
products

Safety  
precautions

# CSB-W/CSB-WR\* Series

## Dimensions: CSB-W Series



● CSB-W-10/15/20/25/32/40/50

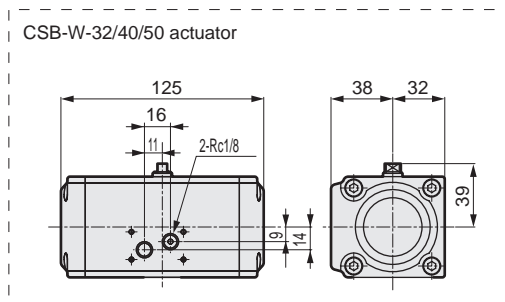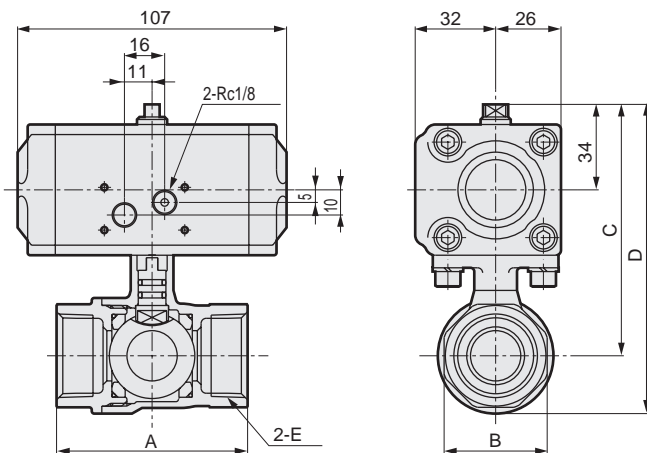

Model No.	A	B	C	D	E
CSB-W-10	56	28	91	107	Rc3/8
CSB-W-15	56	28	91	107	Rc1/2
CSB-W-20	65	34	97	117.5	Rc3/4
CSB-W-25	76	41	100	124	Rc 1
CSB-W-32	84	50	116	145.5	Rc1 <sup>1</sup> / <sub>4</sub>
CSB-W-40	94	57	122	157.5	Rc1 <sup>1</sup> / <sub>2</sub>
CSB-W-50	108	70	131	171.5	Rc 2

## Dimensions: CSB-WR\* Series

● CSB-WR\*-10/15/20/25/32

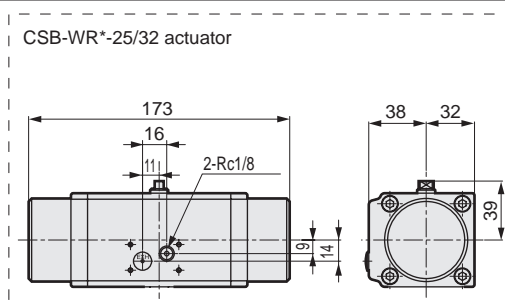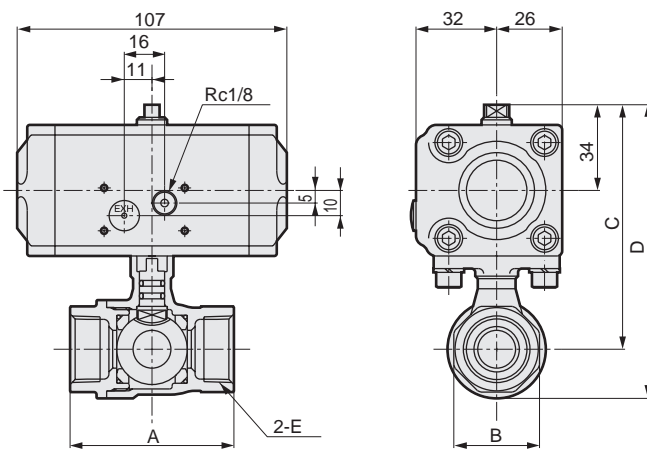

Model No.	A	B	C	D	E
CSB-WR*-10	56	28	91	107	Rc3/8
CSB-WR*-15	56	28	91	107	Rc1/2
CSB-WR*-20	65	34	97	117.5	Rc3/4
CSB-WR*-25	76	41	110	134	Rc1
CSB-WR*-32	84	50	116	145.5	Rc1 <sup>1</sup> / <sub>4</sub>

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components


Pneumatic  
valves

**Fluid control  
valves**

Pneumatic  
cylinders

Related  
products

Safety  
precautions



Medium bore size cylinder  
Double acting/single rod outdoor type

# SCA2 Series

● Bore size:  $\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$

JISCode



## Specifications

Item	Description					
Bore size mm	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Actuation	Double acting					
Working fluid	Compressed air					
Max. working pressure MPa	1.0					
Min. working pressure MPa	0.05					
Proof pressure MPa	1.6					
Ambient temperature °C	-20 to 60 (no freezing) Note					
Port size	Rc 1/4	Rc 3/8		Rc 1/2		
Stroke tolerance mm	$^{+0.9}_0$ (up to 360), $^{+1.4}_0$ (up to 800)					
Working piston speed mm/s	50 to 1000 (Operate within the allowable absorbed energy.)					
Cushion	Air cushion					
Effective air cushion length mm	14.6	16.6	16.6	20.6	23.6	
Lubrication	Not available					
Allowable absorbed energy J	With cushion Note	4.29	8.37	15.8	27.9	49.8
	Without cushion	0.067	0.079	0.079	0.201	0.301

Note: The temperature range of the cushion packing is -10 to 60°C. When using in a low-temperature environment, select the type without cushion and if necessary, use an external shock absorber.

## Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
$\varnothing 40$	25/50/75/100/150/200/250/300/350/400/450/500	600	1
$\varnothing 50$			
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			

\*1: The custom Stroke is available in 1 mm increments.

## Cylinder weight

(Unit: kg)

Bore size (mm)	Product weight when Stroke (S) = 0 mm			Per S = 100 mm Additional weight
	Basic (00)	Foot (LB)	Flange (FA, FB)	
$\varnothing 40$	0.92	1.04	1.28	0.39
$\varnothing 50$	1.29	1.49	1.73	0.46
$\varnothing 63$	1.69	2.01	2.73	0.50
$\varnothing 80$	2.88	3.48	4.60	0.90
$\varnothing 100$	4.48	5.25	7.08	1.12

(Example) Product weight of SCA2-LB-50B-200-W ————


- Product weight for stroke length 0 mm.....1.49 kg
- Additional weight for 200 mm stroke length.....  $0.46 \times \frac{200}{100} = 0.92$  kg
- Product weight.....1.49+0.92=2.41 kg

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
$\varnothing 40$	Push	62.8	$1.26 \times 10^2$	$1.88 \times 10^2$	$2.51 \times 10^2$	$3.77 \times 10^2$	$5.03 \times 10^2$	$6.28 \times 10^2$	$7.54 \times 10^2$	$8.80 \times 10^2$	$1.01 \times 10^3$	$1.13 \times 10^3$	$1.26 \times 10^3$
	Pull	52.8	$1.06 \times 10^2$	$1.58 \times 10^2$	$2.11 \times 10^2$	$3.17 \times 10^2$	$4.22 \times 10^2$	$5.28 \times 10^2$	$6.33 \times 10^2$	$7.39 \times 10^2$	$8.44 \times 10^2$	$9.50 \times 10^2$	$1.06 \times 10^3$
$\varnothing 50$	Push	98.2	$1.96 \times 10^2$	$2.95 \times 10^2$	$3.93 \times 10^2$	$5.89 \times 10^2$	$7.85 \times 10^2$	$9.82 \times 10^2$	$1.18 \times 10^3$	$1.37 \times 10^3$	$1.57 \times 10^3$	$1.77 \times 10^3$	$1.96 \times 10^3$
	Pull	82.5	$1.65 \times 10^2$	$2.47 \times 10^2$	$3.30 \times 10^2$	$4.95 \times 10^2$	$6.60 \times 10^2$	$8.25 \times 10^2$	$9.90 \times 10^2$	$1.15 \times 10^3$	$1.32 \times 10^3$	$1.48 \times 10^3$	$1.65 \times 10^3$
$\varnothing 63$	Push	$1.56 \times 10^2$	$3.12 \times 10^2$	$4.68 \times 10^2$	$6.23 \times 10^2$	$9.35 \times 10^2$	$1.25 \times 10^3$	$1.56 \times 10^3$	$1.87 \times 10^3$	$2.18 \times 10^3$	$2.49 \times 10^3$	$2.81 \times 10^3$	$3.12 \times 10^3$
	Pull	$1.40 \times 10^2$	$2.80 \times 10^2$	$4.20 \times 10^2$	$5.61 \times 10^2$	$8.41 \times 10^2$	$1.12 \times 10^3$	$1.40 \times 10^3$	$1.68 \times 10^3$	$1.96 \times 10^3$	$2.24 \times 10^3$	$2.52 \times 10^3$	$2.80 \times 10^3$
$\varnothing 80$	Push	$2.51 \times 10^2$	$5.03 \times 10^2$	$7.54 \times 10^2$	$1.01 \times 10^3$	$1.51 \times 10^3$	$2.01 \times 10^3$	$2.51 \times 10^3$	$3.02 \times 10^3$	$3.52 \times 10^3$	$4.02 \times 10^3$	$4.52 \times 10^3$	$5.03 \times 10^3$
	Pull	$2.27 \times 10^2$	$4.54 \times 10^2$	$6.80 \times 10^2$	$9.07 \times 10^2$	$1.36 \times 10^3$	$1.81 \times 10^3$	$2.27 \times 10^3$	$2.72 \times 10^3$	$3.17 \times 10^3$	$3.63 \times 10^3$	$4.08 \times 10^3$	$4.54 \times 10^3$
$\varnothing 100$	Push	$3.93 \times 10^2$	$7.85 \times 10^2$	$1.18 \times 10^3$	$1.57 \times 10^3$	$2.36 \times 10^3$	$3.14 \times 10^3$	$3.93 \times 10^3$	$4.71 \times 10^3$	$5.50 \times 10^3$	$6.28 \times 10^3$	$7.07 \times 10^3$	$7.85 \times 10^3$
	Pull	$3.57 \times 10^2$	$7.15 \times 10^2$	$1.07 \times 10^3$	$1.43 \times 10^3$	$2.14 \times 10^3$	$2.86 \times 10^3$	$3.57 \times 10^3$	$4.29 \times 10^3$	$5.00 \times 10^3$	$5.72 \times 10^3$	$6.43 \times 10^3$	$7.15 \times 10^3$

### How to order

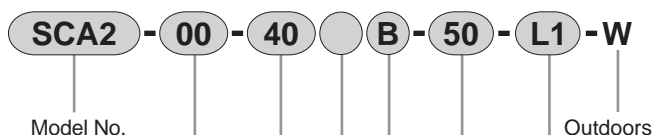

**A** Mounting  
\*1, \*2

**B** Bore size

**C** Port thread

**D** Cushion

**E** Stroke

**F** Option

Code	Description	
<b>A Mounting</b>		
<b>00</b>	Basic *3	
<b>LB</b>	Axial foot	
<b>FA</b>	Rod side flange	
<b>FB</b>	Head side flange	
<b>B Bore size (mm)</b>		
<b>40</b>	ø40	
<b>50</b>	ø50	
<b>63</b>	ø63	
<b>80</b>	ø80	
<b>100</b>	ø100	
<b>C Port thread</b>		
<b>Blank</b>	Rc thread	
<b>N</b>	NPT thread (made to order)	
<b>G</b>	G thread (made-to-order product)	
<b>D Cushion</b>		
<b>B</b>	Both sides cushioned	
<b>R</b>	Rod side cushioned	
<b>H</b>	Head side cushioned	
<b>N</b>	Without cushion	
<b>E Stroke (mm)</b>		
<b>Bore size</b>	<b>Stroke</b>	<b>Custom Stroke</b>
ø40 to 63	<b>1 to 600</b>	In 1 mm increments
ø80	<b>1 to 700</b>	
ø100	<b>1 to 800</b>	
<b>F Option</b>		
<b>L1</b>	With silicone bellows (external metal ring stainless steel) Max. ambient temperature: 250°C / instantaneous max. temperature: 400°C	
<b>Blank</b>	Cushion needle position R (standard)	
<b>S</b>	Cushion needle position S	
<b>T</b>	Cushion needle position T	

### ⚠ Precautions for model No. selection

\*1: Mounting bracket will be shipped assembled with the product.

\*2: Consult with CKD for mounting type for oscillation.

\*3: For 00 mounting, remove the hexagon socket button head bolt and plain washer of the round nut screw hole used for cylinder assembly.

[Example of model No.]

### SCA2-LB-40B-100-L1-W

Model: Medium bore size cylinder, double acting/single rod

- A** Mounting : Axial foot
- B** Bore size : ø40 mm
- C** Port thread : Rc thread
- D** Cushion : Both sides cushioned
- E** Stroke : 100mm
- F** Option : Max. ambient temperature with silicone bellows; 250 degrees

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves


Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions

## Internal structure and parts list

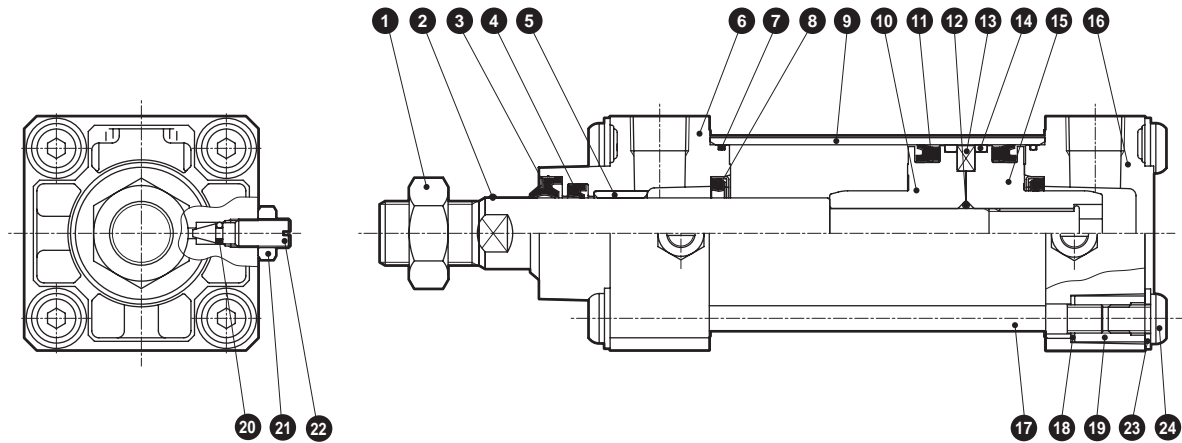

Part No.	Part name	Material	Remarks	Part No.	Part name	Material	Remarks
1	Rod nut	Stainless steel		13	Magnet	Plastic	
2	Piston rod	Stainless steel	Industrial chrome plating	14	Wear ring	Polyacetal resin	
3	Scraper	Nitrile rubber		15	Piston H	Aluminum alloy die-casting	
4	Rod packing	Hydrogenated nitrile rubber		16	Head cover	Aluminum alloy die-casting	Painted
5	Bush	Oil-impregnated bearing alloy		17	Tie rod	Stainless steel	
6	Rod cover	Aluminum alloy die-casting	Painted	18	Conical spring washer	Steel	Black finish
7	Cylinder gasket	Nitrile rubber		19	Round nut	Steel	Zinc chromate
8	Cushion packing	Nitrile rubber/steel		20	Needle gasket	Nitrile rubber	
9	Cylinder tube	Aluminum alloy	Hard alumite	21	Needle nut	Copper alloy	Nickel plating
10	Piston R	Aluminum alloy die-casting		22	Cushion needle	Copper alloy	Nickel plating
11	Piston packing	Hydrogenated nitrile rubber		23	Flat washer	Stainless steel	
12	Piston gasket	Nitrile rubber		24	Hexagon socket button head bolt	Stainless steel	

### Consumable parts list


Bore size (mm)	Kit No.	Consumable parts No.
ø40	SCA2-40K-W	
ø50	SCA2-50K-W	
ø63	SCA2-63K-W	
ø80	SCA2-80K-W	
ø100	SCA2-100K-W	

\*1: Specify the kit No. when placing an order.



## Dimensions

● Basic (00)

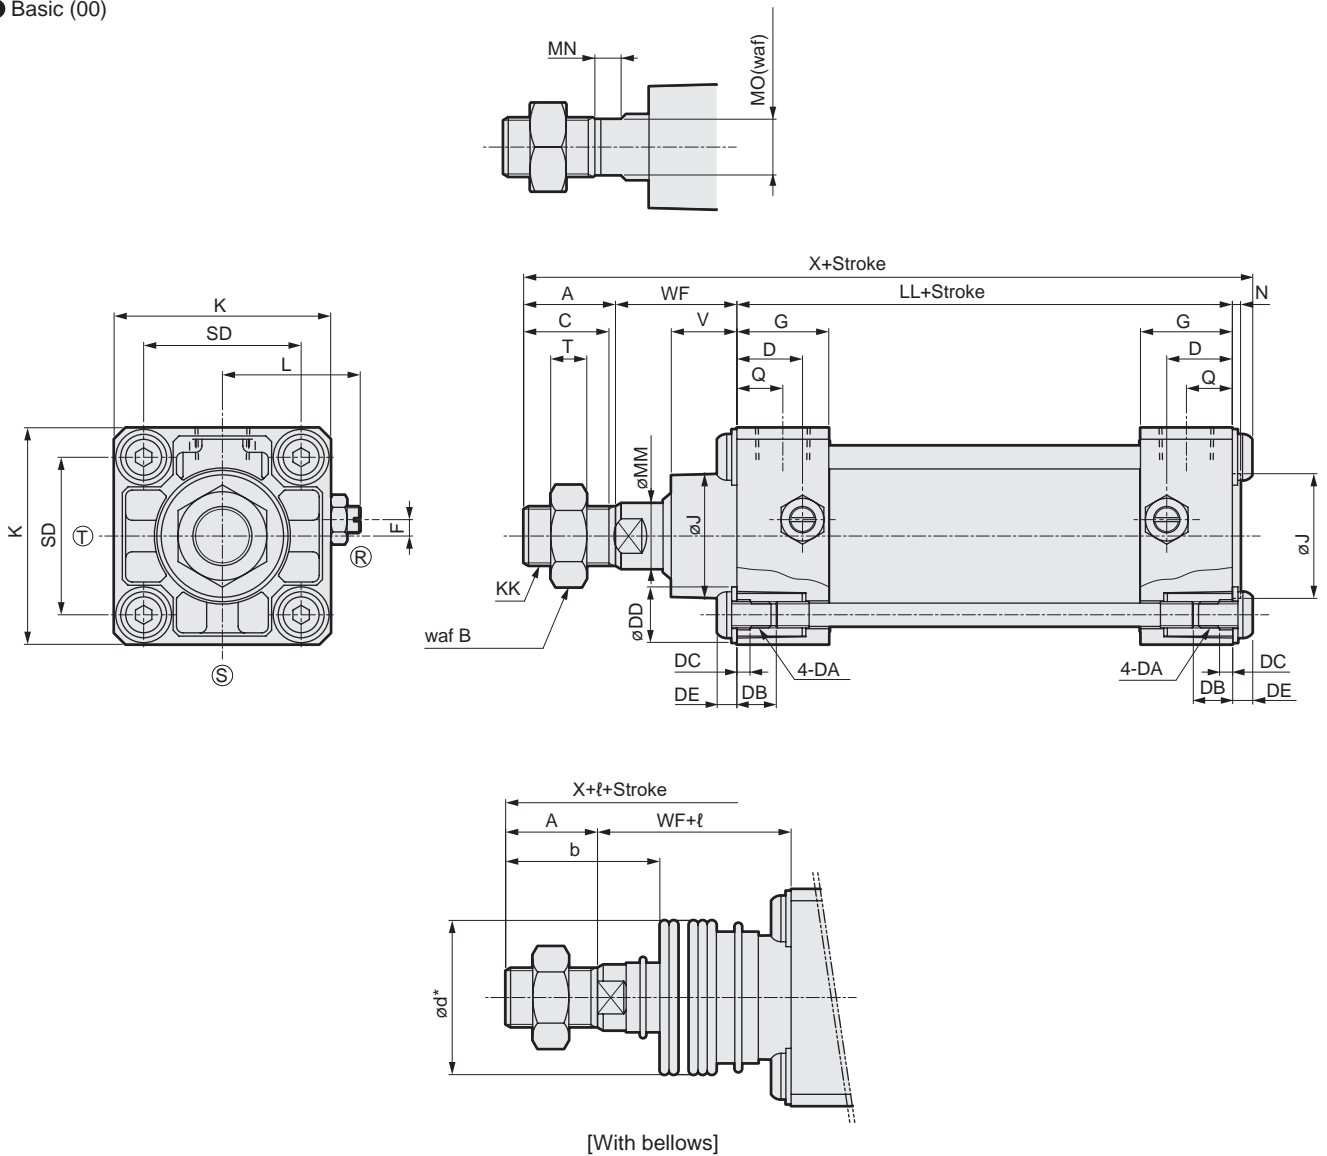


Code	Basic (00)														
Bore size(mm)	A	C	D	DA	DB	DC	DD	DE	EE	F	G	J	K	KK	L
ø40	22	20	18	M8	12	4	14	6	Rc1/4	7.5	26	31	57	M 14 x 1.5	38 to 39.5
ø50	28	26	20	M8	12	4	14	6	Rc3/8	0	28	38	66	M 18 x 1.5	41 to 43.5
ø63	28	26	22	M8	12	4	14	6	Rc3/8	0	30	38	80	M 18 x 1.5	47.5 to 50.0
ø80	36	34	26	M12	16	5	21	9	Rc1/2	0	34	43	98	M 22 x 1.5	56 to 59
ø100	45	43	28	M12	16	5	21	9	Rc1/2	0	36	51	118	M 26 x 1.5	66 to 69

Code											
Bore size (mm)	LL	MM	MN	MO	N	Q	SD	T	V	WF	X
ø40	93	16	8	14	2	13	40.5	8	17	33.5	154.5
ø50	101	20	8	17	2.5	14	48	11	20	37	172
ø63	105	20	8	17	3	15	59	11	20.5	35	174
ø80	116	25	11	22	3.5	17	74	13	23	48	209
ø100	128	30	13	27	4	18	90	16	30.5	53	235

\* Installation dimensions of other mounting types are the same as those of the SCA2 (standard). Refer to the SCA2 (standard) dimensions in "Pneumatic General Catalog (No. CB-029SA)".

Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions



Medium bore size cylinder  
Double acting/single rod outdoor type

# SCS2 Series

● Bore size :  $\phi 125/\phi 140/\phi 160/\phi 180/\phi 200/\phi 250$

JIS symbol



## Specifications

Item		Description					
Bore size	mm	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 200$	$\phi 250$
Actuation		Double acting					
Working fluid		Compressed air					
Max. working pressure	MPa	1.0					
Min. working pressure	MPa	0.05					
Proof pressure	MPa	1.6					
Ambient temperature	$^{\circ}\text{C}$	-20 to 60(However, no freezing)Note					
Port size		Rc 1/2	Rc 3/4			Rc1	
Stroke tolerance	mm	$+1.0_0$ ( to 300), $+1.4_0$ ( to 1000), $+1.8_0$ ( to 1200)					
Working piston speed	mm/s	20 to 1000(Operate within the absorbed energy.)					
Cushion		Air cushion					
Effective air cushion length	mm	21.6	21.6	21.6	21.6	26.6	26.6
Lubrication		Not available					
Allowable absorbed energy J	Cushioned Note	63.5	91.5	116	152	233	362
	Without cushion	0.371	0.386	0.386	0.958	1.08	2.32

Note: The temperature range of the cushion packing is -5 to 60 $^{\circ}\text{C}$ . When using in a low-temperature environment, select the type without cushion and if necessary, use an external shock absorber.

## Stroke

Bore size (mm)	Standard Straw# (mm )	Max. Stroke (mm )	Min. Stroke (mm)
$\phi 125$	50/75/100/150/ 200/250/300	800	1
$\phi 140$			
$\phi 160$			
$\phi 180$			
$\phi 200$			
$\phi 250$			

\*1: The custom stroke length is available in 1 mm increments.

## Cylinder weight

(Unit: kg)

Item/mounting	Product weight when Stroke (S) = 0 mm			S=100mm Additional weight per
	Bore size (mm)	Basic (00)	Axial foot (LB)	
$\phi 125$	7.22	8.72	10.52	1.54
$\phi 140$	9.35	11.35	14.75	1.78
$\phi 160$	12.35	15.45	19.25	2.22
$\phi 180$	16.75	21.25	28.75	2.96
$\phi 200$	22.78	28.48	36.48	3.54
$\phi 250$	40.51	48.91	66.41	5.38

(Example) Product weight of SCS2-N-LB-125B-300-W ————


- Product weight when S = 0 mm.....8.72 kg
- Additional weight when S = 300 mm...  $1.54 \times \frac{300}{100} = 4.62$  kg
- Product weight .....8.72+4.62=13.34kg

## Theoretical thrust table

(Unit: N)

Bore size (mm )	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
$\phi 125$	Push	$6.14 \times 10^2$	$1.23 \times 10^3$	$1.84 \times 10^3$	$2.45 \times 10^3$	$3.68 \times 10^3$	$4.91 \times 10^3$	$6.14 \times 10^3$	$7.36 \times 10^3$	$8.59 \times 10^3$	$9.82 \times 10^3$	$1.10 \times 10^4$	$1.23 \times 10^4$
	Pull	$5.73 \times 10^2$	$1.15 \times 10^3$	$1.72 \times 10^3$	$2.29 \times 10^3$	$3.44 \times 10^3$	$4.59 \times 10^3$	$5.73 \times 10^3$	$6.88 \times 10^3$	$8.03 \times 10^3$	$9.17 \times 10^3$	$1.03 \times 10^4$	$1.15 \times 10^4$
$\phi 140$	Push	$7.70 \times 10^2$	$1.54 \times 10^3$	$2.31 \times 10^3$	$3.08 \times 10^3$	$4.62 \times 10^3$	$6.16 \times 10^3$	$7.70 \times 10^3$	$9.24 \times 10^3$	$1.08 \times 10^4$	$1.23 \times 10^4$	$1.39 \times 10^4$	$1.54 \times 10^4$
	Pull	$7.29 \times 10^2$	$1.46 \times 10^3$	$2.19 \times 10^3$	$2.92 \times 10^3$	$4.38 \times 10^3$	$5.84 \times 10^3$	$7.29 \times 10^3$	$8.75 \times 10^3$	$1.02 \times 10^4$	$1.17 \times 10^4$	$1.31 \times 10^4$	$1.46 \times 10^4$
$\phi 160$	Push	$1.01 \times 10^3$	$2.01 \times 10^3$	$3.02 \times 10^3$	$4.02 \times 10^3$	$6.03 \times 10^3$	$8.04 \times 10^3$	$1.01 \times 10^4$	$1.21 \times 10^4$	$1.41 \times 10^4$	$1.61 \times 10^4$	$1.81 \times 10^4$	$2.01 \times 10^4$
	Pull	$9.42 \times 10^2$	$1.88 \times 10^3$	$2.83 \times 10^3$	$3.77 \times 10^3$	$5.65 \times 10^3$	$7.54 \times 10^3$	$9.42 \times 10^3$	$1.13 \times 10^4$	$1.32 \times 10^4$	$1.51 \times 10^4$	$1.70 \times 10^4$	$1.88 \times 10^4$
$\phi 180$	Push	$1.27 \times 10^3$	$2.54 \times 10^3$	$3.82 \times 10^3$	$5.09 \times 10^3$	$7.63 \times 10^3$	$1.02 \times 10^4$	$1.27 \times 10^4$	$1.53 \times 10^4$	$1.78 \times 10^4$	$2.04 \times 10^4$	$2.29 \times 10^4$	$2.54 \times 10^4$
	Pull	$1.19 \times 10^3$	$2.39 \times 10^3$	$3.58 \times 10^3$	$4.77 \times 10^3$	$7.16 \times 10^3$	$9.54 \times 10^3$	$1.19 \times 10^4$	$1.43 \times 10^4$	$1.67 \times 10^4$	$1.91 \times 10^4$	$2.15 \times 10^4$	$2.39 \times 10^4$
$\phi 200$	Push	$1.57 \times 10^3$	$3.14 \times 10^3$	$4.71 \times 10^3$	$6.28 \times 10^3$	$9.42 \times 10^3$	$1.26 \times 10^4$	$1.57 \times 10^4$	$1.88 \times 10^4$	$2.20 \times 10^4$	$2.51 \times 10^4$	$2.83 \times 10^4$	$3.14 \times 10^4$
	Pull	$1.47 \times 10^3$	$2.95 \times 10^3$	$4.42 \times 10^3$	$5.89 \times 10^3$	$8.84 \times 10^3$	$1.18 \times 10^4$	$1.47 \times 10^4$	$1.77 \times 10^4$	$2.06 \times 10^4$	$2.36 \times 10^4$	$2.65 \times 10^4$	$2.95 \times 10^4$
$\phi 250$	Push	$2.45 \times 10^3$	$4.91 \times 10^3$	$7.36 \times 10^3$	$9.82 \times 10^3$	$1.47 \times 10^4$	$1.96 \times 10^4$	$2.45 \times 10^4$	$2.95 \times 10^4$	$3.44 \times 10^4$	$3.93 \times 10^4$	$4.42 \times 10^4$	$4.91 \times 10^4$
	Pull	$2.31 \times 10^3$	$4.63 \times 10^3$	$6.94 \times 10^3$	$9.25 \times 10^3$	$1.39 \times 10^4$	$1.85 \times 10^4$	$2.31 \times 10^4$	$2.78 \times 10^4$	$3.24 \times 10^4$	$3.70 \times 10^4$	$4.16 \times 10^4$	$4.63 \times 10^4$

### How to order

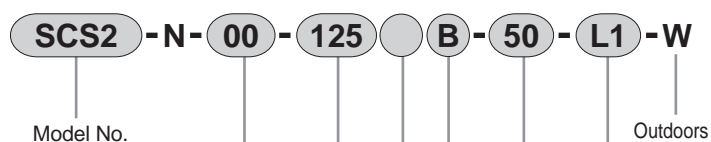

**A** Mounting  
\*2

**B** Bore size

**C** Port thread

**D** Cushion

**E** Stroke  
\*3

**F** Option

Code	Description	
<b>A Mounting</b>		
<b>00</b>	Basic	
<b>LB</b>	Axial foot	
<b>FA</b>	Rod side flange	
<b>FB</b>	Head side flange	
<b>B Bore size (mm)</b>		
<b>125</b>	ø125	
<b>140</b>	ø140	
<b>160</b>	ø160	
<b>180</b>	ø180	
<b>200</b>	ø200	
<b>250</b>	ø250	
<b>C Port thread</b>		
<b>Blank</b>	Rc thread	
<b>N</b>	NPT thread (made to order)	
<b>G</b>	G thread (made-to-order product)	
<b>D Cushion</b>		
<b>B</b>	Both sides cushioned	
<b>R</b>	Rod side cushioned	
<b>H</b>	Head side cushioned	
<b>N</b>	Without cushion	
<b>E Stroke (mm)</b>		
Bore size	Stroke	Custom Stroke
ø125 to ø160	<b>1 to 800</b>	In 1 mm increments
ø180	<b>1 to 900</b>	
ø200	<b>1 to 945</b>	
ø250	<b>1 to 751</b>	
<b>F Option</b>		
<b>L1</b>	With silicone bellows (external metal ring stainless steel) Max. ambient temperature: 250°C / instantaneous max. temperature: 400°C	
<b>Blank</b>	Cushion needle position (standard)	
<b>R</b>	Cushion needle position R	
<b>S</b>	Cushion needle position S	
<b>T</b>	Cushion needle position T	

### ⚠ Precautions for model No. selection

\*1: Mounting bracket will be shipped assembled with the product.

\*2: Consult with CKD for mounting type for oscillation.

\*3: Outdoor type does not support class 2 pressure vessel.

[Example of model No.]

### SCS2-N-LB-125B-50-L1-W

Model: Medium bore size cylinder, double acting/single rod

- A** Mounting : Axial foot
- B** Bore size : ø125 mm
- C** Port thread : Rc thread
- D** Cushion : Both sides cushioned
- E** Stroke : 50mm
- F** Option : With silicone bellows Max. ambient temperature: 250 degrees

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves


Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions

## Internal structure and parts list

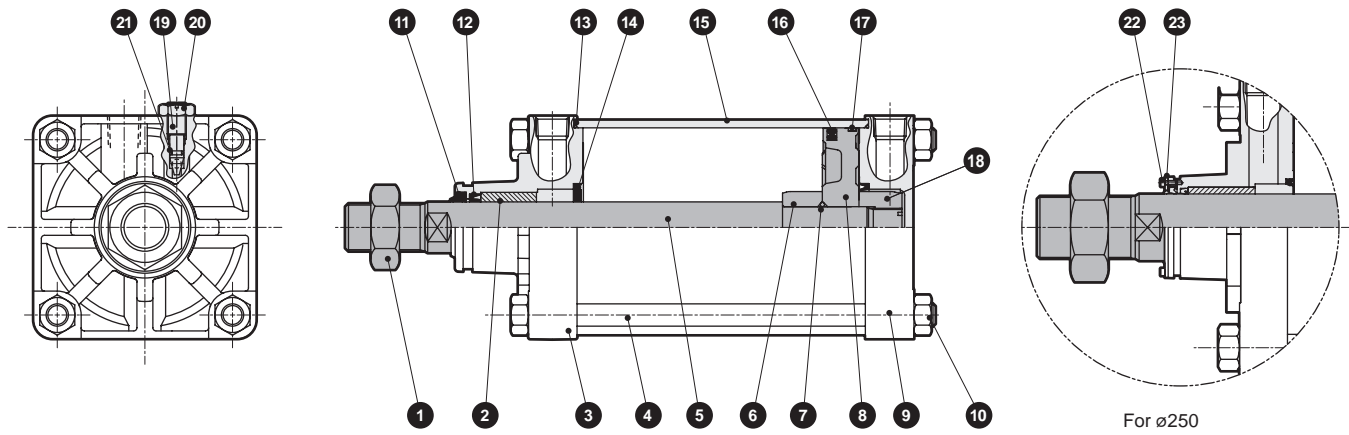

Note: The parts 14, 19, 20, and 21 are not required for the type without cushion.

Part No.	Part name	Material	Remarks	Part No.	Part name	Material	Remarks
1	Hexagon nut	Stainless steel		13	Cylinder gasket	Nitrile rubber	
2	Bush	Iron-copper oil impregnated bearing alloy		14	Cushion packing	Nitrile rubber/steel	
3	Rod cover	Aluminum alloy casting	Chromate	15	Cylinder tube	Aluminum alloy	Hard alumite
4	Tie rod	Stainless steel		16	Piston packing	Hydrogenated nitrile rubber	
5	Piston rod	Stainless steel	Industrial chrome plating	17	Wear ring	Polyacetal resin	
6	Cushion ring A	Steel	Zinc chromate	18	Cushion ring B	Steel	Zinc chromate
7	Piston gasket	Nitrile rubber		19	Cushion needle	Copper alloy	
8	Piston	Aluminum alloy casting		20	Hexagon nut	Stainless steel	
9	Head cover	Aluminum alloy casting	Chromate	21	Needle gasket	Nitrile rubber	
10	Hexagon nut	Stainless steel		22	Hexagon socket head cap screw	Stainless steel	ø250 only
11	Scraper	Nitrile rubber/steel		23	Retainer plate	Stainless steel	ø250 only
12	Rod packing	Hydrogenated nitrile rubber					

### Consumable parts list


Bore size (mm)	Kit No.	Consumable parts No.
ø125	<b>SCS2-N-125K-W</b>	
ø140	<b>SCS2-N-140K-W</b>	
ø160	<b>SCS2-N-160K-W</b>	11 12 13 14 16 17
ø180	<b>SCS2-N-180K-W</b>	21
ø200	<b>SCS2-N-200K-W</b>	
ø250	<b>SCS2-N-250K-W</b>	

### Dimensions

Same as double acting/rubber scraper SCS2-G. Refer to the SCS2-G dimensions in "Pneumatic Cylinders (No. CB-029SA)".

## Dimensions

● Basic (00)

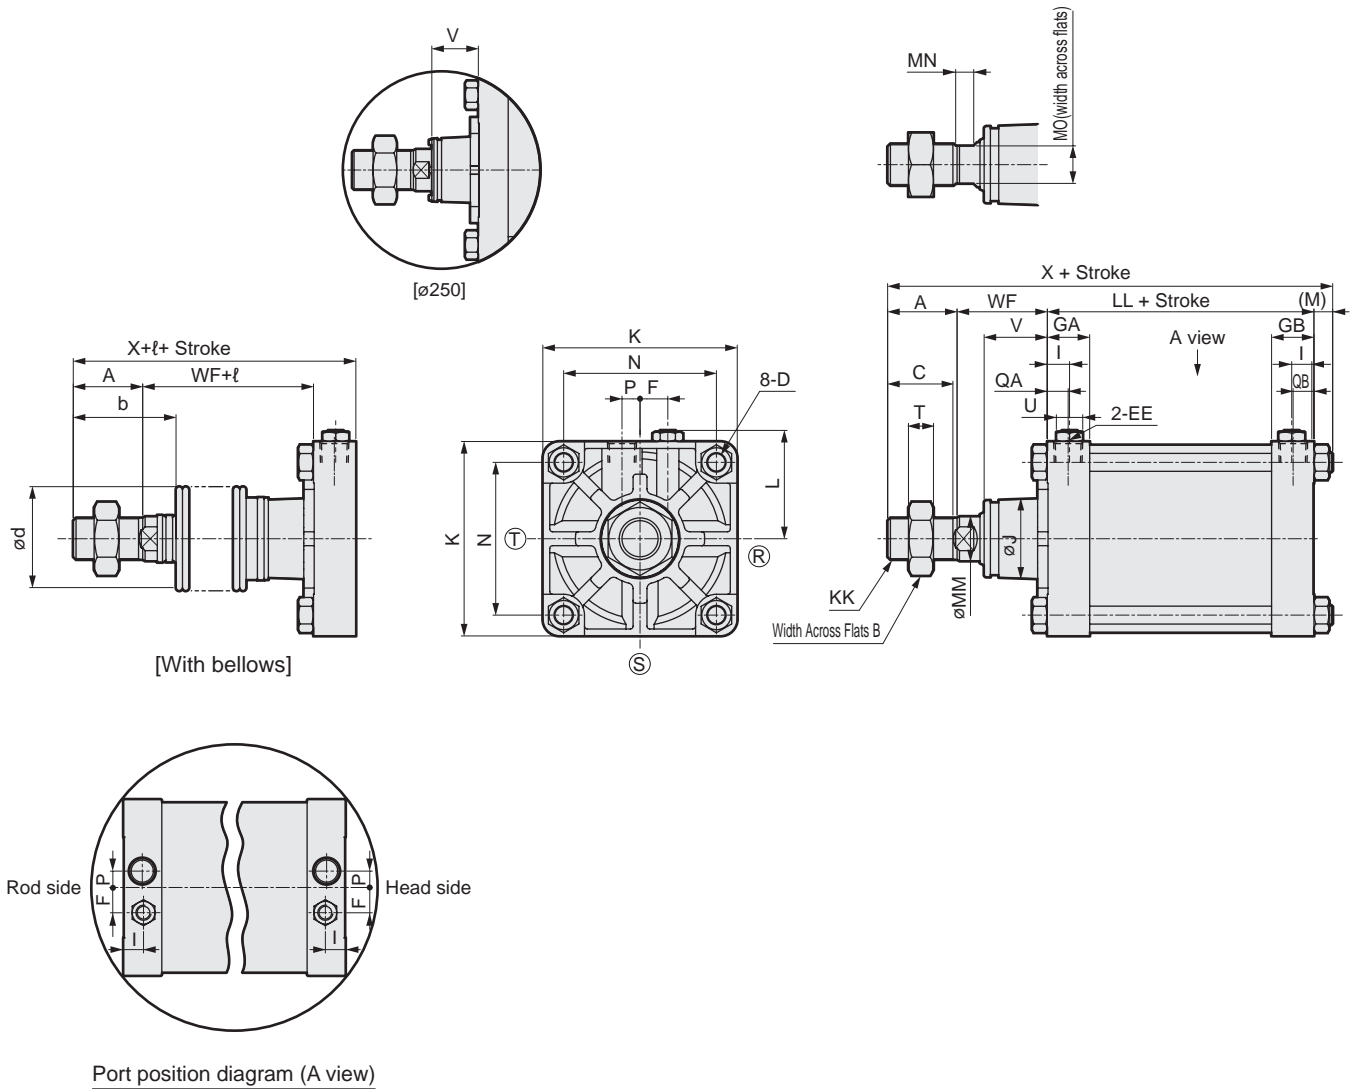

\*1: (R) (S) (T) indicate the cushion needle position.

\*2: ℓ dimensions below decimal point are rounded up.

Code	Basic (00) Basic dimensions																					
Bore size (mm)	A	B	C	D	EE	GA	GB	F	I	J	K	KK	L	LL	M	MM	MN	MO	N	P	QA	QB
ø125	50	46	47	M 14 x 1.5	Rc1/2	30.5	30.5	20	16	57	140	M 30 x 1.5	78 to 82	92	13.5	32	13	27	110	13	15	15
ø140	50	46	47	M 14 x 1.5	Rc3/4	34.5	34.5	20	20	57	157	M 30 x 1.5	86.5 to 91	103	13.5	32	13	27	124	15	17	17
ø160	56	55	53	M 16 x 1.5	Rc3/4	34.5	34.5	24	20	62	177	M 36 x 1.5	96.5 to 101	106	15.5	40	15	36	142	15	17	17
ø180	63	60	60	M 18 x 1.5	Rc3/4	34.5	34.5	24	20	68	200	M 40 x 1.5	108 to 112	110	17.5	45	17	41	160	15	17	17
ø200	72	70	69	M 20 x 1.5	Rc3/4	37.5	37.5	24	20.5	75	220	M 45 x 1.5	120.5 to 129	123	18.5	50	20	46	175	20	18	18
ø250	88	85	84	M 24 x 1.5	Rc1	42.5	42.5	24	20.5	93	274	M 56 x 2	147.5 to 156	141	21.5	60	22	55	216	22	21	21

Code	With bellows							
Bore size (mm)	T	U	V	WF	X	b	d	ℓ
ø125	18	19	45.5	65	220.5	74	75	(Stroke/4.55) + 11
ø140	18	19	45.5	67	233.5	74	75	(Stroke/4.55) + 9
ø160	21	19	48	71	248.5	82	82	(Stroke/5.15) + 9
ø180	24	19	53	78	268.5	91	91	(Stroke/5.15) + 9
ø200	27	24	60	88	301.5	102	95	(Stroke/5.30) + 9
ø250	34	24	67	94	344.5	120	120	(Stroke/6.40) + 9

Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions



Main line filter

# AF3000 Series Outdoors

## Specifications

Item	AF3016 □-50	AF3032 □-80	AF3048 □-100	AF3064 □-100	AF3080 □-150	AF3096 □-150	AF3128 □-150	AF3160 □-200	AF3192 □-200	AF3256 □-200
Processing air flow rate (*2, *3) m <sup>3</sup> /min(ANR)	16	32	48	64	80	96	128	160	192	256
Working fluid	Compressed air									
Working pressure MPa	0.07 to 1.0									
Proof pressure MPa	1.5									
Element quantity	1	2	3	4	5	6	8	10	12	16
Port size (*1) Flange	2 B	3 B	4 B	4 B	6 B	6 B	6 B	8 B	8 B	8 B
Weight kg	45	95	98	130	160	190	250	260	300	350

□ indicates series name.


Item	P type	S type	M type	X type
Ambient temperature	5 to 60			5 to 30
Filtration rating μm	3	0.3	0.01	Suction by activated carbon
Secondary side oil concentration mg/m <sup>3</sup>	-	1.0 (inlet air 30°C)	0.1 (inlet air 30°C)	0.03 (inlet air 30°C)
Pressure drop	Initial MPa	Within 0.005	Within 0.01	Within 0.01
	Normal MPa	0.005 to 0.02	0.01 to 0.03	0.02 to 0.04
	Element replacement MPa	0.007	0.07	0.07
Differential pressure gauge	Standard (model No.: GA5102-S11)			
Drain discharger	Standard (model No.: 5100-4C-MG)			No

\*1: Flange is 10K flange.

\*2: Processing air flow rate is the atmospheric pressure conversion value where the inlet pressure is 0.7MPa and initial pressure drop is 0.005MPa.

\*3: ANR indicates conditions of 20°C atmospheric pressure and relative humidity 65%.

## How to order

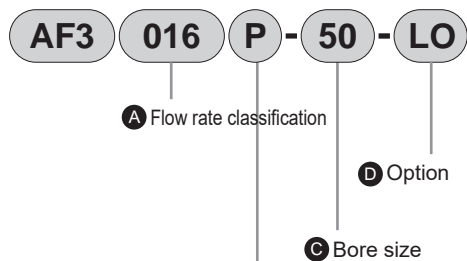

Bore size/flow rate classification table

Flow rate classification	016	032	048	064	080	096	128	160	192	256
50 Flange 2 B	●									
80 Flange 3 B	●									
100 Flange 4 B		●	●							
150 Flange 6 B				●	●	●				
200 Flange 8 B							●	●	●	

## Precautions for model No. selection

\*1: Viewed from the front, standard products have an air inlet on the left port and an air outlet on the right port. "For" "X1", an air inlet is provided on the right port, with an air outlet provided on the left port.


\*2: Available for AF3032P to AF3256P.

\*3: When ordering several options, indicate the required options in alphabetical order.

\*4: Made to order. Contact CKD for details.

Code	Description
<b>A Flow rate classification</b>	
016	16m <sup>3</sup> /min (ANR)
032	32m <sup>3</sup> /min (ANR)
048	48m <sup>3</sup> /min (ANR)
064	64m <sup>3</sup> /min (ANR)
080	80m <sup>3</sup> /min (ANR)
096	96m <sup>3</sup> /min (ANR)
128	48m <sup>3</sup> /min (ANR)
160	64m <sup>3</sup> /min (ANR)
192	19.8m <sup>3</sup> /min (ANR)
256	25.8m <sup>3</sup> /min (ANR)
<b>B Element</b>	
P	P Series (pre-filter)
S	S Series (oil removing filter)
M	M Series (high-performance oil removing filter)
X	X Series (activated carbon filter)
<b>C Bore size</b>	
Refer to the bore size/flow rate classification table on the left.	
<b>D Option</b>	
Blank	No
H	English language specifications
K	Companion flange included
L	Foundation bolt/nut included (*2)
L1	Stainless steel foundation bolt/nut included (*2)
O	Outdoors
X1	IN/OUT reverse direction (*1)
Y2	Product photo


## Flow characteristics

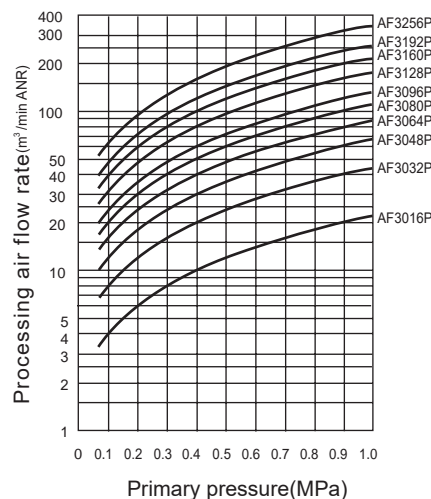

### Note on selection

- Never use model numbers found to be below the point of intersection of the selection conditions.
- When the point of intersection found according to selecting conditions and flow characteristics curves are on the same line, the service life may be shortened, so select a model that is one size larger.
- Unit performance may not be attained if used at less than the selected pressure. Always select the model No. for the working pressure.

### Internal structure and parts list

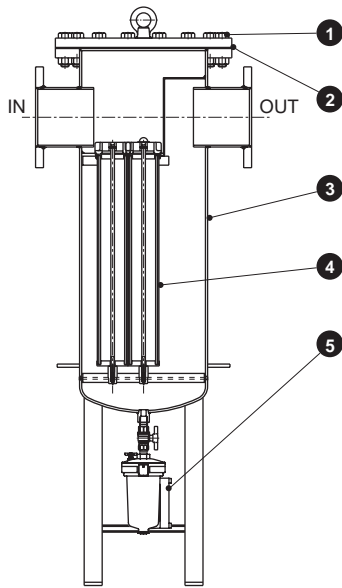

Parts list \* Consumable parts

No.	Part name	Material
1	Upper flange	SS400
2	* Gasket	NBR
3	Body	SS400
4	* Element kit	PP, NBR, etc.
5	* Drain discharger	ZDC, PC, etc.

The drain discharger and stop valve are included.

Consumable parts model No.



Flow rate classification m <sup>3</sup> min(ANR)	2 Gasket	4 Element kit	5 Drain discharger
16	AF3016P-GASKET	AF3016 □-ELEMENT-KIT	5100-4C -MG
32	AF3032P-GASKET	AF3032 □-ELEMENT-KIT	
48	AF3048P-GASKET	AF3048 □-ELEMENT-KIT	
64	AF3064P-GASKET	AF3064 □-ELEMENT-KIT	
80	AF3080P-GASKET	AF3080 □-ELEMENT-KIT	
96	AF3096P-GASKET	AF3096 □-ELEMENT-KIT	
128	AF3128P-GASKET	AF3128 □-ELEMENT-KIT	
160	AF3160P-GASKET	AF3160 □-ELEMENT-KIT	
192	AF3192P-GASKET	AF3192 □-ELEMENT-KIT	
256	AF3256P-GASKET	AF3256 □-ELEMENT-KIT	

Element quantity is indicated in ( ). □ indicates series name.


### Dimensions

● AF3016□

● AF3032□ to 3256□

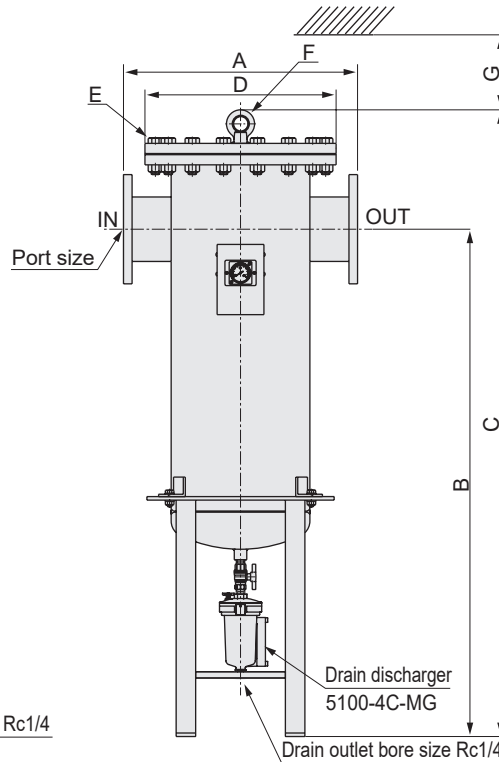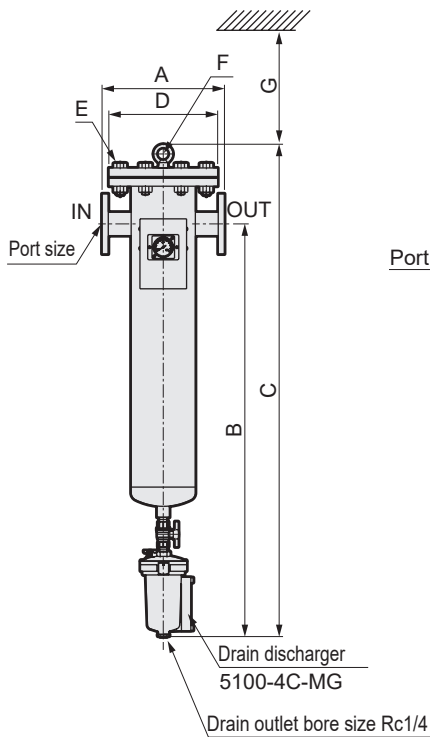

● Installation legs foundation bolt hole dimension



The drain discharger and stop valve cannot be mounted on the X Series.

Model No.	Port size	A	B	C	D	E	F	G
AF3016 □-50	Flange 2B	315	1045	1250	280	8-M20×70	M12	600
AF3032 □-80	Flange 3B	500	1255	1495	400	12-M22×80	M12	600
AF3048 □-100	Flange 4B	500	1255	1495	400	12-M22×80	M12	600
AF3064 □-100	Flange 4B	550	1270	1522	445	16-M22×80	M16	600
AF3080 □-150	Flange 6B	600	1300	1606	490	16-M22×80	M20	600
AF3096 □-150	Flange 6B	650	1320	1630	560	16-M24×90	M20	600
AF3128 □-150	Flange 6B	700	1350	1693	620	20-M24×90	M20	600
AF3160 □-200	Flange 8B	700	1350	1693	620	20-M24×90	M20	600
AF3192 □-200	Flange 8B	750	1360	1709	675	20-M24×100	M20	600
AF3256 □-200	Flange 8B	850	1400	1786	745	20-M30×110	M24	600

□ indicates series name.

Model No.	H	J	K
AF3032 □-80	210	210	ø15
AF3048 □-100	210	210	ø15
AF3064 □-100	250	250	ø15
AF3080 □-150	280	280	ø15
AF3096 □-150	320	320	ø15
AF3128 □-150	350	350	ø15
AF3160 □-200	350	350	ø15
AF3192 □-200	400	400	ø15
AF3256 □-200	450	450	ø15





Main line filter

# AF5000 Series

# Outdoors

## Specifications

Item	AF5016 □ -50	AF5032 □ -80	AF5048 □ -100	AF5064 □ -100	AF5080 □ -150	AF5096 □ -150	AF5128 □ -150	AF5160 □ -200	AF5192 □ -200	AF5256 □ -200
Processing air flow rate (*2, *3) m <sup>3</sup> /min(ANR)	16	32	48	64	80	96	128	160	192	256
Working fluid	Compressed air									
Working pressure MPa	0.08 to 1.0									
Proof pressure MPa	1.5									
Element quantity	1	2	3	4	5	6	8	10	12	16
Port size (*1) Flange	2 B	3 B	4 B	4 B	6 B	6 B	6 B	8 B	8 B	8 B
Weight kg	45	95	98	130	160	190	250	260	300	350

□ indicates series name.

Item	P type	S type	M type	X type
Ambient temperature	5 to 60			5 to 30
Filtration rating μm	3	0.3	0.01	Suction by activated carbon
Secondary side oil concentration mg/m <sup>3</sup>	-	0.5 (inlet air 21°C)	0.01 (inlet air 21°C)	0.003 (inlet air 21°C)
Pressure drop	Initial MPa	Within 0.005	0.007	0.01
	Normal MPa	0.01	0.014	0.02
	Element replacement MPa	0.035	0.035	0.035
Differential pressure gauge	Standard (model No.: GA5102-S11)			No
Drain discharger	Standard (model No.: 5100-4C-MG)			No

\*1: Flange is 10K flange.

\*2: Processing air flow rate is the atmospheric pressure conversion value where the inlet pressure is 0.7MPa and initial pressure drop is 0.005MPa.

\*3: ANR indicates conditions of 20°C atmospheric pressure and relative humidity 65%.

## How to order

**AF5** **016** **P** - **50** - **X1** -\*\*

**A** Flow rate classification

**B** Element

**C** Bore size

**D** Option

Code	Description
<b>A Flow rate classification</b>	
<b>016</b>	16m <sup>3</sup> /min (ANR)
<b>032</b>	32m <sup>3</sup> /min (ANR)
<b>048</b>	48m <sup>3</sup> /min (ANR)
<b>064</b>	64m <sup>3</sup> /min (ANR)
<b>080</b>	80m <sup>3</sup> /min (ANR)
<b>096</b>	96m <sup>3</sup> /min (ANR)
<b>128</b>	48m <sup>3</sup> /min (ANR)
<b>160</b>	64m <sup>3</sup> /min (ANR)
<b>192</b>	19.8m <sup>3</sup> /min (ANR)
<b>256</b>	25.8m <sup>3</sup> /min (ANR)

<b>B Element</b>	
<b>P</b>	P Series (pre-filter)
<b>S</b>	S Series (oil removing filter)
<b>M</b>	M Series (high-performance oil removing filter)
<b>X</b>	X Series (activated carbon filter)

<b>C Bore size</b>	
Refer to the bore size/flow rate classification table to the lower left.	

<b>D Option</b>	
<b>Blank</b>	Standard product
<b>D</b>	Drain discharger 5100-4C (*1)
<b>E</b>	Without drain discharger
<b>K</b>	Companion flange included
<b>H</b>	English language specifications
<b>H2</b>	Stainless steel nameplate
<b>L</b>	Foundation bolt/Nut included (SS400) (*2)
<b>L1</b>	Foundation bolt/Nut included (SUS304) (*2)
<b>X1</b>	IN/OUT reverse direction(*3)
<b>Y2</b>	Product photo

## Flow rate compensation coefficient

Pressure(MPa)	Compensation coefficient
0.1	0.38
0.2	0.53
0.3	0.65
0.4	0.76
0.5	0.85
0.6	0.93
0.7	1.0
0.8	1.07
0.9	1.13
1.0	1.18

If working pressure is other than 0.7 MPa, multiply processing air flow rate by the above coefficient.

## ⚠️ Precautions for model No. selection

\*1: "D" drain discharger 5100-4C is recommended for working environments where electric wiring is not possible.

\*2: "L" and "L1" are applicable to AF5032P to AF5256P.

\*3: Viewed from the front, a standard product has an air inlet on the left port, while an air outlet on the right port. For "X1", an air inlet is provided on the right port, while an air outlet is provided on the left port.

\*4: Unit performance may not be attained if used at less than the selected pressure. Always select the model No. for the working pressure.

\*5: When ordering several options, indicate the required options in alphabetical order.

\*6: Made to order. Contact CKD for details.

\*7: Contact CKD for model No.

Bore size/flow rate classification table


<b>C Bore size</b>		016	032	048	064	080	096	128	160	192	256
<b>50</b>	Flange 2 B	●									
<b>80</b>	Flange 3 B		●								
<b>100</b>	Flange 4 B			●	●						
<b>150</b>	Flange 6 B					●	●	●			
<b>200</b>	Flange 8 B								●	●	●




## Dimensions



● AF5016□

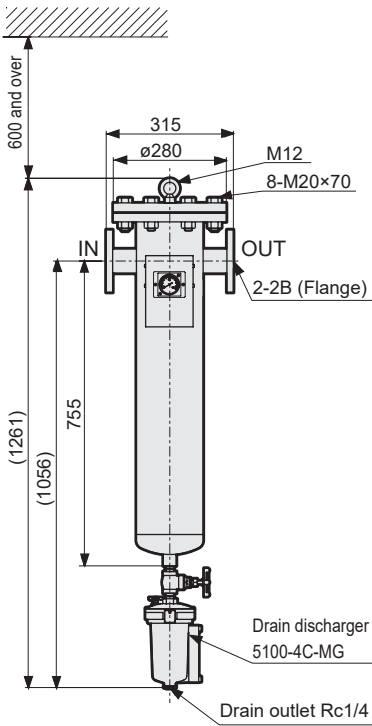


● AF5032□ to AF5256□

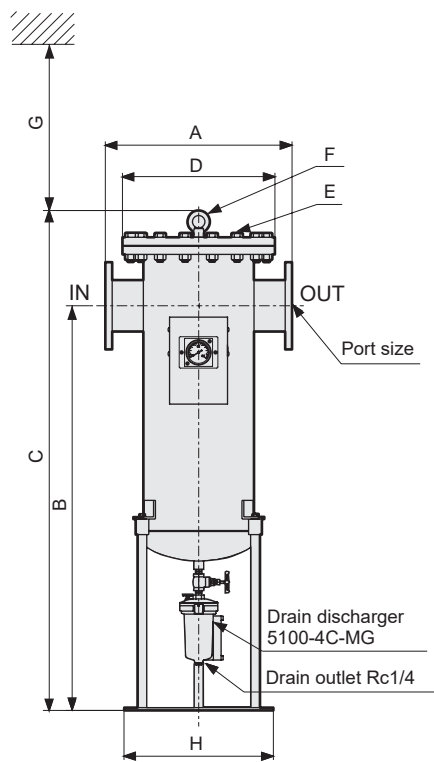

The X type does not have a differential pressure gauge.

● Foundation bolt hole dimension




Model No.	Port size	A	B	C	D	E	F	G	H	J	K
AF5032 □-80	Flange 3B	500	1255	1495	$\phi 400$	12-M22×80	M12	600	$\phi 380$	210	$\phi 15$
AF5048 □-100	Flange 4B	500	1255	1495	$\phi 400$	12-M22×80	M12	600	$\phi 380$	210	$\phi 15$
AF5064 □-100	Flange 4B	550	1270	1522	$\phi 445$	16-M22×80	M16	600	$\phi 440$	250	$\phi 15$
AF5080 □-150	Flange 6B	600	1300	1606	$\phi 490$	16-M22×80	M20	600	$\phi 480$	280	$\phi 15$
AF5096 □-150	Flange 6B	650	1320	1630	$\phi 560$	16-M24×90	M20	600	$\phi 540$	320	$\phi 15$
AF5128 □-150	Flange 6B	700	1350	1693	$\phi 620$	20-M24×90	M20	600	$\phi 610$	350	$\phi 15$
AF5160 □-200	Flange 8B	700	1350	1693	$\phi 620$	20-M24×90	M20	600	$\phi 610$	350	$\phi 15$
AF5192 □-200	Flange 8B	750	1360	1709	$\phi 675$	20-M24×100	M20	600	$\phi 670$	400	$\phi 15$
AF5256 □-200	Flange 8B	850	1400	1786	$\phi 745$	20-M30×110	M24	600	$\phi 730$	450	$\phi 15$

□ indicates series name.

Drain separator  
F.R.L. unit  
Pneumatic auxiliary  
components  
Pneumatic  
valves  
Fluid control  
valves  
Pneumatic  
cylinders  
Related  
products  
Safety  
precautions

## Consumable parts list

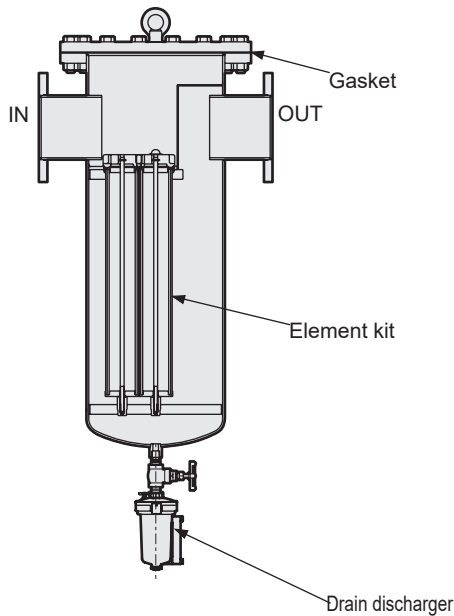

● Ordering method

Flow rate classification m <sup>3</sup> /min(ANR)	Gasket	Element kit	Drain exhaustOutput
16	AF5016P-GASKET	AF5016 □-ELEMENT-KIT	5100-4C-MG
32	AF5032P-GASKET	AF5032 □-ELEMENT-KIT	
48	AF5048P-GASKET	AF5048 □-ELEMENT-KIT	
64	AF5064P-GASKET	AF5064 □-ELEMENT-KIT	
80	AF5080P-GASKET	AF5080 □-ELEMENT-KIT	
96	AF5096P-GASKET	AF5096 □-ELEMENT-KIT	
128	AF5128P-GASKET	AF5128 □-ELEMENT-KIT	
160	AF5160P-GASKET	AF5160 □-ELEMENT-KIT	
192	AF5192P-GASKET	AF5192 □-ELEMENT-KIT	
256	AF5256P-GASKET	AF5256 □-ELEMENT-KIT	

□ indicates series name. The drain discharger and differential pressure gauge are not included on the X type.

Made-to-order product

### Xeroaqua GT9000 (D) Series

- Stainless steel heat exchanger compatible with oil-free air
- IP03-equivalent weather resistance
- Compatible with high temperature environments (ambient temperature 48°C) (GT9075D to GT9190D)
- Energy-saving operation with 50% decreased power by limiting the number of refrigerant systems (GT9300(W) to GT9450(W))
- Energy-saving operation with 60% decreased power through inverter control (GT9710WV2,GT9960WV2)
- Easy maintenance
- Universal installation in any area





# Safety Precautions

Be sure to read this section before use.

When designing and manufacturing a device using CKD products, the manufacturer is obligated to check that device safety mechanism, pneumatic control circuit, or water control circuit and the system operated by electrical control that controls the devices is secured.


It is important to select, use, handle and maintain the product appropriately to ensure that the CKD product is used safely.


Observe warnings and precautions to ensure device safety.


Check that device safety is ensured, and manufacture a safe device.

## WARNING

- 1** This product is designed and manufactured as a general industrial machine part. It must be handled by an operator having sufficient knowledge and experience.
  - 2** Use this product in accordance with specifications.  
This product must be used within its stated specifications. In addition, never modify or additionally machine this product. This product is intended for use in general industrial machinery equipment or parts. It is not intended for use outdoors (except for products with outdoor specifications) or for use under the following conditions or environments. (Note that this product can be used when CKD is consulted prior to its usage and the customer consents to CKD product specifications. The customer should provide safety measures to avoid danger in the event of problems.)
    - 1** Use for applications requiring safety, including nuclear energy, railways, aircraft, marine vessels, vehicles, medical devices, devices or applications in contact with beverages or foodstuffs, amusement devices, emergency cutoff circuits, press machines, brake circuits, or safety devices or applications.
    - 2** Use for applications where life or assets could be significantly affected, and special safety measures are required.
  - 3** Observe organization standards and regulations, etc., related to the safety of device design and control, etc. ISO4414, JIS B 8370 (Pneumatics fluid power - General rules and safety requirements for systems and their components) JFPS2008 (Principles for pneumatic cylinder selection and use) Including the High Pressure Gas Safety Act, Industrial Safety and Health Act, other safety rules, organization standards and regulations, etc.
  - 4** Do not handle, pipe, or remove devices before confirming safety.
    - 1** Inspect and service the machine and devices after confirming safety of all systems related to this product.
    - 2** Note that there may be hot or charged sections even after operation is stopped.
    - 3** When inspecting or servicing the device, turn OFF the energy source (air supply or water supply), and turn OFF power to the facility. Discharge any compressed air from the system, and pay attention to possible water leakage and leakage of electricity.
    - 4** When starting or restarting a machine or device that incorporates pneumatic components, make sure that the system safety, such as pop-out prevention measures, is secured.
  - 5** Observe warnings and cautions in the following pages to prevent accidents.
- The precautions are ranked as "DANGER", "WARNING" and "CAUTION" in this section.

 **DANGER:** When a dangerous situation may occur if handling is mistaken leading to fatal or serious injuries, and when there is a high degree of emergency to a warning.

 **WARNING:** If handled incorrectly, a dangerous situation may occur, resulting in death or serious injury.

 **CAUTION:** When a dangerous situation may occur if handling is mistaken leading to minor injuries or physical damage.

Note that some items described as "CAUTION" may lead to serious results depending on the situation. Every item provides important information and must be observed.

## Warranty

- 1** **Warranty period**  
The product specified herein is warranted for one (1) year from the date of delivery to the location specified by the customer.
- 2** **Warranty coverage**  
If the product specified herein fails for reasons attributable to CKD within the warranty period specified above, CKD will promptly provide a replacement for the faulty product or a part thereof or repair the faulty product at one of CKD's facilities free of charge. However, following failures are excluded from this warranty:
  - 1) Failure caused by handling or use of the product under conditions and in environments not conforming to those stated in the catalog, the Specifications, or the Instruction Manual.
  - 2) Failure caused by use of the product exceeding its durability (cycles, distance, time, etc.) or caused by consumable parts.
  - 3) Failure not caused by the product.
  - 4) Failure caused by use not intended for the product.
  - 5) Failure caused by modifications/alterations or repairs not carried out by CKD.
  - 6) Failure caused by reasons unforeseen at the level of technology available at the time of delivery.
  - 7) Failure caused by acts of nature and disasters beyond control of CKD.

The warranty stated herein covers only the delivered product itself. Any loss or damage induced by failure of the delivered product is excluded from this warranty.  
Note: For details on the durability and consumable parts, contact your nearest CKD sales office.
- 3** **Compatibility check**  
The customer is responsible for confirming the compatibility of CKD products with the customer's systems, machines and equipment.



## Safety precautions

# W Series: Warnings and Cautions

Be sure to read this section before use. Refer to "Pneumatic, Vacuum and Auxiliary Components (CB-024SA)", "Pneumatic Valves (CB-023SA)", "General Purpose Valves (CB-03-1SA)" and "Pneumatic Cylinders (CB-029SA)" for general and product-specific precautions.

### Product-specific cautions: FRL, drain separator, pressure gauge (Outdoor Series)

\* For product-specific cautions other than those below, refer to Safety precautions in "Pneumatic, Vacuum and Auxiliary Components (No. CB-024SA)" for FRL unit (modular design) and FRL unit (compact type).

## WARNING

### Design/consideration

- This product is for industrial use. Do not use for medical purposes, or in any equipment or circuit that concerns human life.
- Output pressure exceeding the regulator's set pressure value could result in damage or faulty operation of the secondary side devices. Be sure to install a safety device.

### Working environment

- This product has outdoor specifications, but should not be used in the following environments.
  - When ambient temperature exceeds the specifications. (The product temperature is at risk of exceeding the ambient temperature when exposed to direct sunlight.)
  - When air freezes.
  - In atmospheres containing corrosive gases, liquids and chemicals.
  - Locations with vibration or impact.

### Precautions for use in cold climates

- When using this product in a cold climate, take the necessary measures to prevent freezing. Freezing can cause leakage or operation failure. Conduct appropriate dew point management of air quality.

### Use/maintenance

- Do not disassemble the filter/regulator or regulator cover.

## CAUTION

### Use/maintenance



- Except when adjusting the pressure, tighten the hex nut and secure the adjusting screw. (Use without tightening may lead to damage.)
- Do not apply a load to the product unless it is within the parameters of use. (Do not climb/step onto the product.)
- Using the regulator with the cover facing downward may cause the pressure regulation to fail due to freezing. Be especially careful in low-temperature environments.
- The set pressure changes from the initial set point due to the working environment and conditions, as well as aging of part materials. Check the pressure regularly, and reset if conditions have changed.
- Perform regular maintenance every six months to one year.
- Consumable parts (metal bowl assembly, valve assembly, bottom spring, element, mantle assembly and O-ring) must be replaced every other year. Contact a CKD sales representative for details regarding consumable parts.
- When the set pressure is high, the operating force for rotating the adjusting screw (knob) will increase.

### Working fluids

- Use only compressed air. Air containing corrosive gases, fluids or chemicals could result in improper pressure adjustment due to body damage or rubber deterioration.

### Others

- This product guarantees outdoor use, but not corrosion resistance (no rust or discoloration).
- Fix the hex side of the adaptor nut before screwing the fitting, etc., into the drain outlet of the auto-drain with metal cup. If the hex side of the adaptor nut is not fixed, the product may break due to excessive screw-in of the adaptor nut. When using the metal bowl with auto-drain, if the drain is piped with a tightening fitting, manual operation is not possible.
- Piston drain uses automatic discharge for intermittent flow. Drainage is not discharged under working conditions where air flows constantly.

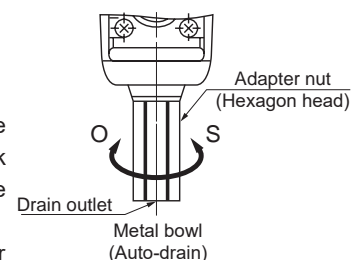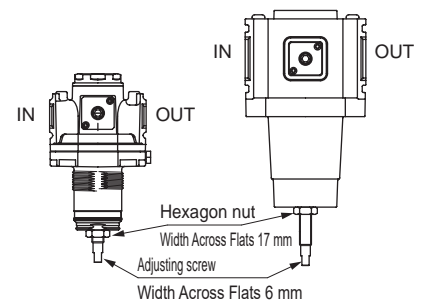



## Safety precautions

# W Series: Warnings and Cautions

Be sure to read this section before use. Refer to "Pneumatic, Vacuum and Auxiliary Components (CB-024SA)", "Pneumatic Valves (CB-023SA)", "General Purpose Valves (CB-03-1SA)" and "Pneumatic Cylinders (CB-029SA)" for general and product-specific precautions.

### Product-specific cautions: silencer/speed controller (Outdoor Series)

\* For precautions other than those below, refer to Product-specific cautions of silencer/speed controller in "Pneumatic, Vacuum and Auxiliary Components (No. CB-C24SA)".

## WARNING

### ■ Design/consideration

- This product is for industrial use. Do not use for medical purposes, or in any equipment or circuit that concerns human life.

### ■ Working environment

- This product has outdoor specifications, but should not be used in the following environments.
  - When ambient temperature and product temperature exceed the specifications. (The product temperature is at risk of exceeding the ambient temperature when exposed to direct sunlight.)
  - When air freezes.
  - In atmospheres containing corrosive gases, liquids and chemicals.
  - Locations with vibration or impact.

### ■ Precautions for use in cold climates

- When using this product in a cold climate, take the necessary measures to prevent freezing. Freezing can cause leakage or operation failure. Conduct appropriate dew point management of air quality.

### ■ Use/maintenance

- Do not disassemble the speed controller.
- Do not install the exhaust outlet of the silencer facing upward. Also, implement measures to prevent foreign matter, dust, and rainwater from entering the exhaust outlet.

## CAUTION

### ■ Use/maintenance

- Do not apply a load to the product unless it is within the parameters of use. (Do not climb/step onto the product.)
- Check that the C snap ring of the silencer does not pop off when removed or attached.
- Assemble the C snap ring of the silencer accurately when replacing the element. Parts used inside could pop out and cause problems if assembly is not complete.
- Depending on the working Status, the element could clog and reduce exhaust in the silencer. Service, clean, and replace the element of the product regularly.

### ■ Working fluids

- Use only compressed air. Air containing corrosive gases, fluids, or chemicals could result in body damage or rubber deterioration.

### ■ Others

- This product guarantees outdoor use, but not corrosion resistance (no rust or discoloration).



## Safety precautions

# W Series: Warnings and Cautions

Be sure to read this section before use. Refer to "Pneumatic, Vacuum and Auxiliary Components (CB-024SA)", "Pneumatic Valves (CB-023SA)", "General Purpose Valves (CB-03-1SA)" and "Pneumatic Cylinders (CB-029SA)" for general and product-specific precautions.

Product-specific cautions: Fluid control valves AB/G41, ADK11, ADK21-W, CHB/G-W (Outdoor Series), pneumatic valves 4F-W (Outdoor Series)

\* For precautions other than the following, refer to Individual precautions AB, AG, ADK, CHB/G in "General Purpose Valves (No. CB-03-1SA)" and Individual precautions 4F in "General Purpose Valves (No. CB-023SA)".

## WARNING

### ■ Design/consideration

- This product is for industrial use. Do not use for medical purposes, or in any equipment or circuit that concerns human life.
- The W Series does not have explosion-proof certification, so it cannot be used in atmospheres requiring explosion-proofing.

### ■ Working environment

- This product has outdoor specifications, but should not be used in the following environments.
  - When ambient temperature and product temperature exceed the specifications. (The product temperature is at risk of exceeding the ambient temperature when exposed to direct sunlight.)
  - When fluid freezes.
  - In atmospheres containing corrosive gases, liquids, chemicals, and explosive gases.
  - Locations with vibration or impact.

### ■ Precautions for use in cold climates

- When using this product in a cold climate, take the necessary measures to prevent freezing. Freezing can cause leakage or operation failure. Conduct appropriate dew point management of air quality.

## CAUTION

### ■ When piping (AB, AG, ADK-W Series/CHB/G-W Series)

- 1) Precautions for implementing antifreezing measures
  - Take care not to interfere with heat dissipation at the coil.
  - The heat generated by the coil will increase, risking early deterioration or coil disconnection.

### ■ Wiring

#### 1) Precautions for disassembly and assembly

##### ● Precautions for assembly of cap

The cap must be assembled in a certain direction. When the cap is to be assembled after performing wiring work, etc., make sure to assemble the cap with attention to the assembly direction. When placed in the opposite direction, the cap cannot be assembled.

#### 2) Wiring

(1) Fasten crimp terminals to the electrical wiring and process the ends of the wires before installing them.

- \* Use terminal thread of size M3 and a crimp terminal with an outer diameter of 7 mm or less.
- \* The crimp terminals used should be sheathed terminals.

(2) Tighten the screws with the following tightening torque.

- \* Gap mounting screw tightening torque: 0.5 Nm.
- \* Terminal screw tightening torque: 0.5 Nm.

(3-1) When there are 2 lead wires wired from the terminal block of the coil.

\* The terminal box without lamp 3E (AB/G41, ADK11-W Series), B (CHB/G-W Series) and terminal box with lamp 3L (AB/AG41, ADK11-W Series) have no polarity. Wire to the A terminal and C terminal on the terminal block.

\* Terminal box with lamp, BL (CHB/G-W Series), and DC voltage have polarity. Be careful of wiring. Wire the ⊖ pole to the A terminal and the ⊕ pole to the C terminal on the terminal block.

(The solenoid valve will operate even if the polarity is incorrect, but the lamp will not turn ON.)  
(The solenoid valve will operate even if the polarity is incorrect, but the lamp will not turn ON.)




(3-2) When there are 3 lead wires wired from the terminal block of the coil. (\*1)

\* The terminal box 3E/3L (ADK21-W Series) has no polarity.

If the operating frequency is 50Hz, wire to the A terminal and C terminal on the terminal block.  
If the operating frequency is 60Hz, wire to the A terminal and B terminal on the terminal block.

\*1: 4F-W Series cannot have 3 wires.

\*2: It is recommended that you insert a fuse to the electrical circuit for safety and unit protection.

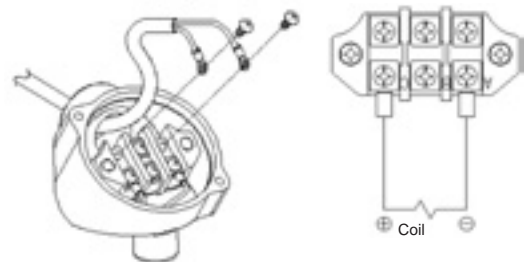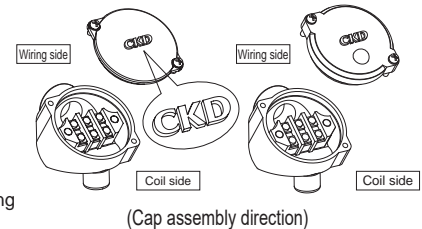

(Wiring method (for three lead wires))





## Safety precautions

# W Series: Warnings and Cautions

Be sure to read this section before use. Refer to "Pneumatic, Vacuum and Auxiliary Components (CB-024SA)", "Pneumatic Valves (CB-023SA)", "General Purpose Valves (CB-03-1SA)" and "Pneumatic Cylinders (CB-029SA)" for general and product-specific precautions.

Product-specific cautions: Fluid control valves AB/G41, ADK11, ADK21-W, CHB-W (Outdoor Series), pneumatic valves 4F-W (Outdoor Series)

\* For precautions other than those below, refer to Individual precautions AB, AG, ADK, CHB in "General Purpose Valves (No. CB-03-1SA)" and Individual precautions 4F in "General Purpose Valves (No. CB-023SA)".

## CAUTION

### ■ When using the product

- The male thread section of the round terminal box main body is fixed to the coil section of the solenoid valve using an adhesive.

Do not remove the round terminal box main body or change the direction of the wiring port. Doing so may cause rainwater to enter the round terminal box through the male thread section. With the CHB-W Series, follow the table below and do not configure the exhaust ports for atmosphere release, and be sure to implement measures to prevent foreign matter, dust, and rainwater from entering the body. In addition, implement waterproof measures for the electrical wires and piping with the use of cable glands, etc.

Actuator (actuation)	Applicable Port
W (double acting)	-
WR* (single acting)	EXH
WV1 (with solenoid valve/double acting)	E1, E2
WX1 (with solenoid valve/single acting)	E1, E2, EXH

\* When using a silencer, install the silencer to E1 and E2 for the V1 type, and to E1 for the X1 type.



### ■ Installation environment

- Because the PE exhaust and breathing hole of 4F-W Series are connected to the atmosphere, install it in a direction where rain water, etc., does not enter directly.

### ■ Installation

- Avoid plugging the E1 and E2 ports. This may cause malfunction. (4F-W Series)

### ■ Manual operation (CHB-W Series, 4F-W Series)

- Use the manual button for confirmation of operation during test operation. When used for long periods in the locked state, the locking mechanism may fail and switch the unit from ON to OFF.

#### ● Manual override


As this is a pilot solenoid valve, the main valve will not be switched even if the manual override is operated unless air is supplied to the S port.

#### ● Locking manual override

If the locking manual override is turned clockwise by approximately 45° with a screwdriver, the valve will be in the same state as when energized and locked. Do not force the rotation, as rotating the device further clockwise after the valve has been locked will cause damage. Be sure to release the lock (0 position) of the locking manual override prior to starting normal operation.

### ■ Others

- This product guarantees outdoor use, but not corrosion resistance (no rust, no discoloration, no peeling of paint).
- This product is provided with performance which enables outdoor use in standard environmental conditions. This product satisfies certain performance requirements after implementation of an accelerated weathering test (sunshine weathering meter) for 1,000 hours and a (salt, dry, moisture) compound cycle test for 960 hours. However, the risk of defects such as rust occurring in a short amount of time may increase when using the unit in a special environment. Consult with CKD when using this device in a special environment.



Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products

Safety  
precautions



## Safety precautions

# W Series: Warnings and Cautions

Be sure to read this section before use. Refer to "Pneumatic, Vacuum and Auxiliary Components (CB-024SA)", "Pneumatic Valves (CB-023SA)", "General Purpose Valves (CB-03-1SA)" and "Pneumatic Cylinders (CB-029SA)" for general and product-specific precautions.

### Product-specific cautions: Pneumatic Cylinder SCA2, SCS2 Series (Outdoor Series)

\* For precautions other than those below, refer to individual precautions SCA2 and SCS2 in "Pneumatic Cylinders (No. CB-029SA)".

#### CAUTION

##### ■ Design/selection

- In dusty places or when exposed to rain or water, it is recommended to attach roofs or covers to extend the service life.
- Use dry air that does not condense according to the ambient temperature and working pressure.
- The bellows and the tie for fixing the bellows are consumable parts. Inspect and replace as necessary every 6 months.

##### [SCA2 Series]

- Cushion packing for 10 to 60°C specifications is used. When using in a low-temperature environment, select the type without cushion and if necessary, use an external shock absorber.

##### [SCS2 Series]

- Cushion packing for 5 to 60°C specifications is used. When using in a low-temperature environment, select the type without cushion and if necessary, use an external shock absorber.

##### ■ Precautions for use in cold climates

- When using this product in a cold climate, take the necessary measures to prevent freezing.
- Protect the piston rod and cylinder from condensation, mist, and other moisture adhering to and freezing.

##### ■ Others

- This product guarantees outdoor use, but not corrosion resistance (no rust or discoloration). However, rust and discoloration in parts other than the sliding parts should not cause basic operation problems.
- This product is provided with performance which enables outdoor use in standard environmental conditions. The product satisfies the specified performance after 1,000 hours of accelerated weathering test (Sunshine Weather Meter) and 960 hours of (salt, dry, wet) combined cycle test. However, the risk of defects such as rust occurring in a short amount of time may increase when using the unit in a special environment. Consult with CKD when using this device in a special environment.

##### ■ Mounting, installation and adjustment

- The thermal expansion coefficient varies by material. The tightening force may change after the cylinder is fastened due to changes in the ambient temperature. Take measures to loosen, such as regularly tightening the screws.

Drain separator  
F.R.L. unit

Pneumatic auxiliary  
components

Pneumatic  
valves

Fluid control  
valves

Pneumatic  
cylinders

Related  
products


Safety  
precautions



---

MEMO

---

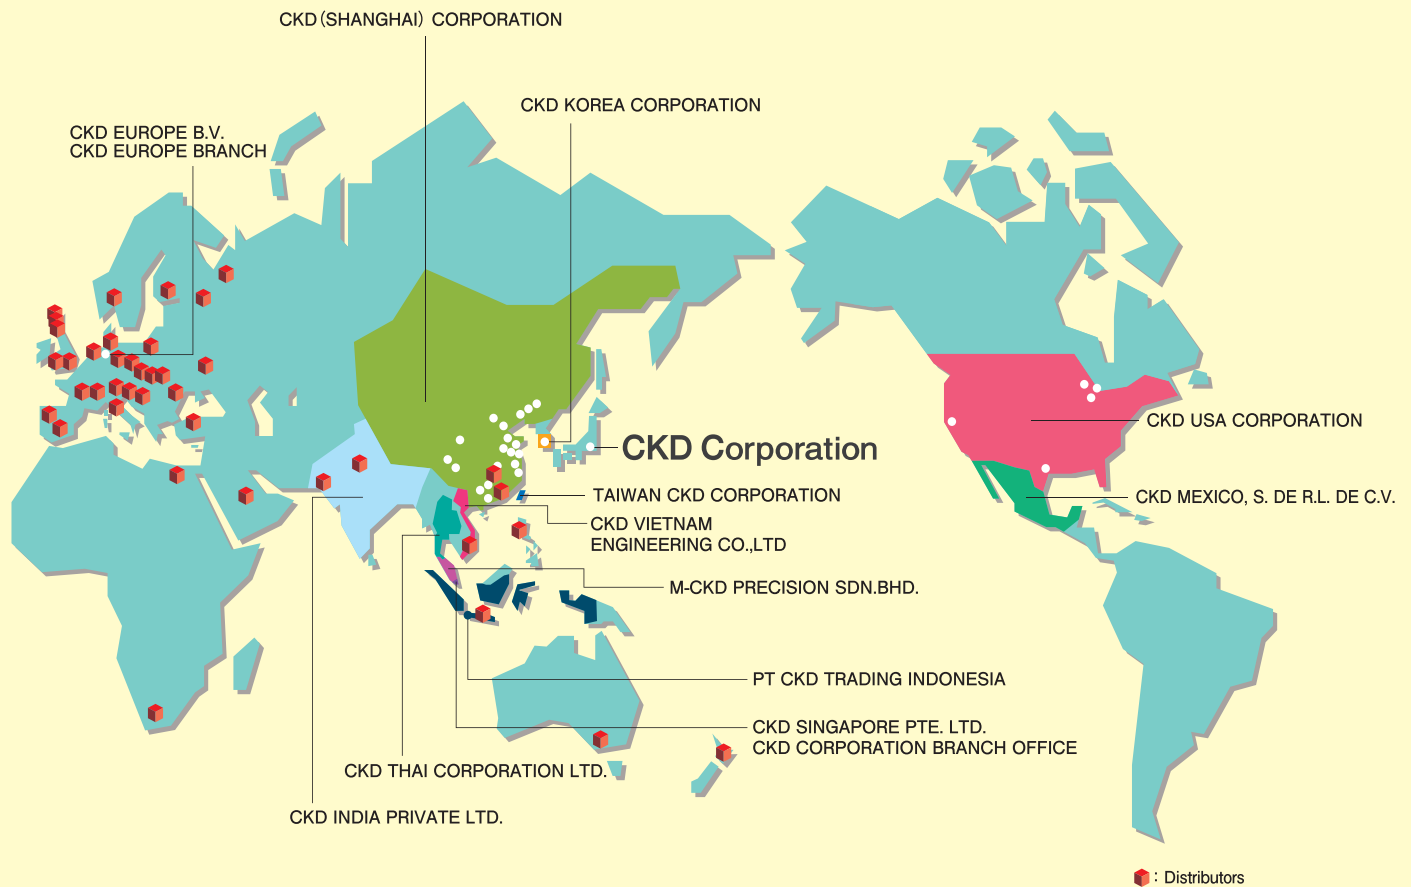

## CKD Corporation

Website <https://www.ckd.co.jp/en/>

- 2-250 Ouji, Komaki City, Aichi 485-8551, Japan
- PHONE +81-568-74-1338 FAX +81-568-77-3461

### ASIA

#### 喜開理(上海)機器有限公司

#### CKD(SHANGHAI)CORPORATION

- 營業部 / 上海浦東事務所 (SALES HEADQUARTERS / SHANGHAI PUXI OFFICE)  
Room 601, 6th Floor, Yuanzhongkeyan Building, No. 1905 Hongmei Road, Xinhui District, Shanghai 200233, China  
PHONE +86-21-61911888 FAX +86-21-60905356
- 上海浦東事務所 (SHANGHAI PUDONG OFFICE)
- 寧波事務所 (NINGBO OFFICE)
- 杭州事務所 (HANGZHOU OFFICE)
- 無錫事務所 (WUXI OFFICE)
- 昆山事務所 (KUNSHAN OFFICE)
- 蘇州事務所 (SUZHOU OFFICE)
- 南京事務所 (NANJING OFFICE)
- 合肥事務所 (HEFEI OFFICE)
- 成都事務所 (CHENGDU OFFICE)
- 武漢事務所 (WUHAN OFFICE)
- 鄭州事務所 (ZHENGZHOU OFFICE)
- 長沙事務所 (CHANGSHA OFFICE)
- 重慶事務所 (CHONGQING OFFICE)
- 西安事務所 (XI'AN OFFICE)
- 廣州事務所 (GUANGZHOU OFFICE)
- 中山事務所 (ZHONGSHAN OFFICE)
- 深圳西事務所 (WEST SHENZHEN OFFICE)
- 深圳東事務所 (EAST SHENZHEN OFFICE)
- 東莞事務所 (DONGGUAN OFFICE)
- 廈門事務所 (XIAMEN OFFICE)
- 福州事務所 (FUZHOU OFFICE)
- 瀋陽事務所 (SHENYANG OFFICE)
- 大連事務所 (DALIAN OFFICE)
- 長春事務所 (CHANGCHUN OFFICE)
- 北京事務所 (BEIJING OFFICE)
- 天津事務所 (TIANJIN OFFICE)
- 青島事務所 (QINGDAO OFFICE)
- 濰坊事務所 (WEIFANG OFFICE)
- 濟南事務所 (JINAN OFFICE)
- 烟台事務所 (YANTAI OFFICE)

#### CKD INDIA PRIVATE LTD.

- HEADQUARTERS  
Unit No. 607, 6th Floor, Welldone Tech Park, Sector 48, Sohna Road, Gurgaon-122018, Haryana, India  
PHONE +91-124-418-8212 FAX +91-(0) 124-418-8216
- BANGALORE OFFICE
- PUNE OFFICE

#### Revision details

Added models and sizes

#### PT CKD TRADING INDONESIA

- HEAD OFFICE  
Menara Bidakara 2, 18th Floor, Jl. Jend. Gatot Subroto Kav. 71-73, Pancoran, Jakarta 12870, Indonesia  
PHONE +62-21-2938-6601 FAX +62-21-2906-9470
- MEDAN OFFICE
- BEKASI OFFICE
- KARAWANG OFFICE
- SEMARANG OFFICE
- SURABAYA OFFICE

#### CKD KOREA CORPORATION

- HEADQUARTERS  
(3rd Floor), 44, Sinsu-ro, Mapo-gu, Seoul 04088, Korea  
PHONE +82-2-783-5201~5203 FAX +82-2-783-5204
- 水原營業所 (SUWON OFFICE)
- 天安營業所 (CHEONAN OFFICE)
- 蔚山營業所 (ULSAN OFFICE)

#### M-CKD PRECISION SDN.BHD.

- HEAD OFFICE  
Lot No.6,Jalan Modal 23/2, Seksyen 23, Kawasan MIEL, Fasa 8, 40300 Shah Alam,Selangor Darul Ehsan, Malaysia  
PHONE +60-3-5541-1468 FAX +60-3-5541-1533
- JOHOR BAHRU BRANCH OFFICE
- PENANG BRANCH OFFICE

#### CKD SINGAPORE PTE. LTD.

- No.33 Tannery Lane #04-01 Hoesteel Industrial Building, Singapore 347789, Singapore  
PHONE +65-67442623 FAX +65-67442486

#### CKD CORPORATION BRANCH OFFICE

- No.33 Tannery Lane #04-01 Hoesteel Industrial Building, Singapore 347789, Singapore  
PHONE +65-67447260 FAX +65-68421022

#### CKD THAI CORPORATION LTD.

- HEADQUARTERS  
19th Floor, Smooth Life Tower, 44 North Sathorn Road, Silom, Bangkok, Bangkok 10500, Thailand  
PHONE +66-2-267-6300 FAX +66-2-267-6304-5
- NAVANAKORN OFFICE
- EASTERN SEABOARD OFFICE
- LAMPHUN OFFICE
- KORAT OFFICE
- AMATANAKORN OFFICE
- PRACHINBURI OFFICE
- SARABURI OFFICE

#### 台灣喜開理股份有限公司

#### TAIWAN CKD CORPORATION

- HEADQUARTERS  
16F-3, No. 7, Sec. 3, New Taipei Blvd., Xinzhuang Dist., New Taipei City 242, Taiwan  
PHONE +886-2-8522-8198 FAX +886-2-8522-8128
- 新竹營業所 (HSINCHU OFFICE)
- 台中營業所 (TAICHUNG OFFICE)
- 台南營業所 (TAINAN OFFICE)
- 高雄營業所 (KAOHSIUNG OFFICE)

#### CKD VIETNAM ENGINEERING CO.,LTD.

- HEADQUARTERS  
18th Floor, CMC Tower, Duy Tan Street, Cau Giay District, Hanoi, Vietnam  
PHONE +84-24-3795-7631 FAX +84-24-3795-7637
- HO CHI MINH OFFICE

#### EUROPE

#### CKD EUROPE B.V.

- HEADQUARTERS  
Beechavenue 125A, 1119 RB Schiphol-Rijk, the Netherlands  
PHONE +31-23-554-1490
- CKD EUROPE GERMANY OFFICE
- CKD EUROPE UK
- CKD EUROPE CZECH O.Z.
- CKD CORPORATION EUROPE BRANCH  
Beechavenue 125A, 1119 RB Schiphol-Rijk, the Netherlands  
PHONE +31-23-554-1490

#### NORTH AMERICA & LATIN AMERICA

#### CKD MEXICO, S. DE R.L. DE C.V.

- Cerrada la Noria No. 200 Int. A-01, Querétaro Park II, Parque Industrial Querétaro, Santa Rosa Jáuregui, Querétaro, C.P. 76220, México  
PHONE +52-442-161-0624

#### CKD USA CORPORATION

- HEADQUARTERS  
1605 Penny Lane, Schaumburg, IL 60173, USA  
PHONE +1-847-648-4400 FAX +1-847-565-4923
- LEXINGTON OFFICE
- SAN ANTONIO OFFICE
- SAN JOSE OFFICE/ TECHNICAL CENTER
- DETROIT OFFICE
- BOSTON OFFICE

The goods and/or their replicas, the technology and/or software found in this catalog are subject to complementary export regulations by Foreign Exchange and Foreign Trade Law of Japan.

If the goods and/or their replicas, the technology and/or software found in this catalog are to be exported from Japan, Japanese laws require the exporter makes sure that they will never be used for the development and/or manufacture of weapons for mass destruction.